

High Performance Slab Edge Insulation System



MAXEdge®
for in-situ
applications.

MAXEdge
comes pre-coated
for clean, fast and
easy slab insulation.



NEW GENERATION
Consciously designed
& engineered

- A cost effective slab edge insulation system
- Designed to meet and exceed new H1 standards
- Lengths of 2.4m and corners of 600 x 600mm
- Available both uncoated and coated with a water-based, water-proof resin






MAXEdge® GIVING YOU OPTIONS

PRE-COATED

With a water-proof resin coating that does not require painting, saving time and money.

CLEAN INSULATION

MAXEdge is also available as clean insulation, requiring plastering after the concrete pour.



Pre-made L Shape Perimeter Slab Insulation

- MAXEdge is a simple solution for your concrete slab perimeter that exceeds H1 requirements.
- Fast and Easy: Pre-made L-shaped perimeter insulation that fits inside the formwork
- Standard heights: 305, 320, 340, 385, 400 & 420mm to suit any raft slab, bespoke heights are available
- MAXEdge perimeter insulation comes in lengths of 2.4m and is also available in pre-made corners of 600 x 600mm
- Suitable with any frame size


Thermal Performance that does the job

Product	Area / Perimeter Ratio									
	1.6	1.8	2	2.2	2.4	2.6	2.8	3	3.6	4
MAXEdge 305 / 320	1.46	1.54	1.62	1.7	1.77	1.85	1.92	2	2.21	2.36
MAXEdge 385 / 400	1.52	1.62	1.72	1.8	1.88	1.96	2.03	2.11	2.33	2.48
MAXEdge 305 / 320 Brick	1.3	1.39	1.47	1.55	1.62	1.7	1.78	1.85	2.06	2.21
MAXEdge 385 / 400 Brick	1.34	1.43	1.53	1.6	1.68	1.76	1.84	1.92	2.14	2.28

Construction R-values in BLUE



Designed to meet new H1 Building Code changes

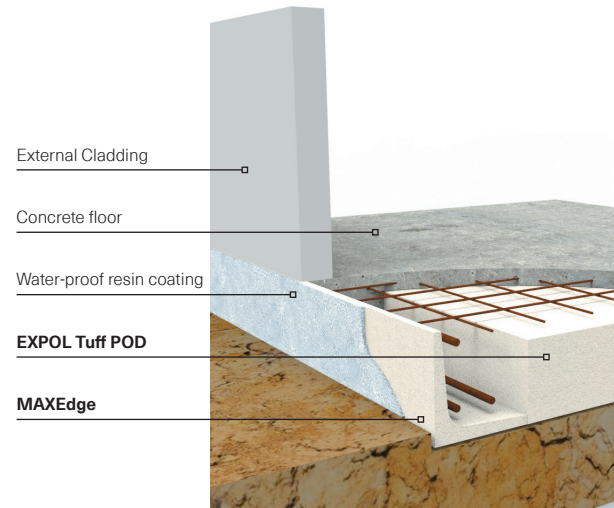


How to Specify


- Engineering design can be supplied or simply ask your engineer to add **MAXEdge** to their designs.
- Talk to our **Tech Team** about your project planning.
- Visit www.expol.co.nz for DWG or PDF files.

SUSTAINABILITY

MAXEdge is made from EPS polystyrene and clean, uncoated MAXEdge waste can be easily recycled.

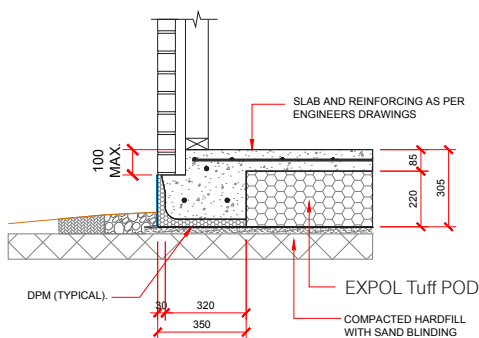

Brick / Stone Veneer
Rebate Detail

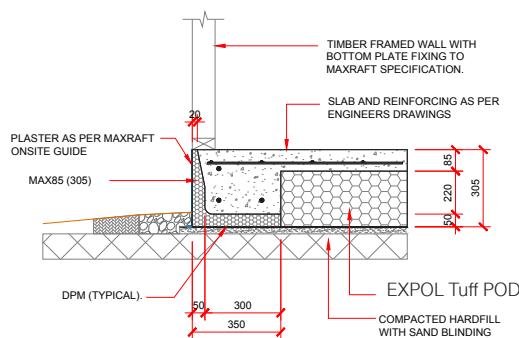

External Footing Detail
20mm Tapered - 50mm Bottom

Scan the code for more information

www.expol.co.nz/expol-maxedge



Learn about our recycling initiatives



Sustainability
E: sustainability@expolearth.co.nz

Website
www.expolearth.co.nz



Contact EXPOL
P: +64 9 634 3449
F: +64 9 634 0756

Sales
T: 0800 86 33 73
E: sales@expol.co.nz

Quotes/Technical
T: 0800 86 33 73
E: tech@expol.co.nz

EXPOL Product Training
T: 0800 86 33 73
www.expolexpert.co.nz

Website
www.expol.co.nz