

## KNAUF INSULATION INTERNAL PARTITION

July 2025

### Applications




### Description

The Knauf Insulation internal partition range includes a selection of thicknesses to provide builders, designers, installers and DIYers the opportunity to choose the best product for their project. Knauf Insulation internal partition batts will improve the thermal and acoustic performance of the building in which it has been installed.

The super-soft and easy to handle benefits of Knauf Insulation glasswool have been further enhanced with TwinTech®. TwinTech® heralds another advancement in insulation manufacture – the dual forming technique ensures there is a smooth finish on both sides of the insulation, which improves product handling and appearance. Knauf Insulation glasswool is made using up to 80% recycled glass and with ECOSE® Technology, a sustainable, plant-based binder that contains no added formaldehyde.

Knauf Insulation glasswool is silicone treated with DriTherm® Technology, which provides improved moisture resistance.

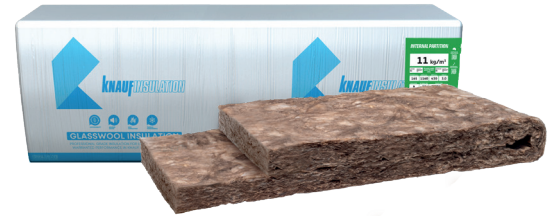

### Performance

<b>Thermal performance</b>	AS/NZS 4859.1 (2018)		
<b>Combustibility (AS 1530.1)</b>	Non-combustible		
<b>Fire Hazard Properties (AS/NZ 1530.3)</b>	Ignitability: 0 Spread of Flame: 0 Heat Evolved: 0 Smoke Developed: 2-3		
<b>MATERIAL PROPERTY</b>	<b>RESULT</b>	<b>REQUIREMENT PER ASTM C665-17</b>	<b>PASS/FAIL</b>
<b>Water Vapour Sorption (Mass %) (ASTM C1104)*</b>	4	<5	Pass
<b>Corrosiveness - Aluminium (rating scale 15-40) (ASTM C665)*</b>	25	<21	Pass
<b>Corrosiveness - Copper (rating scale 15-40) (ASTM C665)*</b>	30	<21	Pass
<b>Corrosiveness - Steel (ASTM C1617)*</b>	1 ppm	<5 ppm	Pass
<b>Fungi Resistance (ASTM C1338)*</b>	No growth	Growth < Comparative	Pass
<b>Water Vapour Absorption</b>	Less than 5% by weight when tested for 96 hours at 120°F (49°C) and 95% humidity.		
<b>Microbial Growth</b>	Does not support microbial growth		

\* Test samples were 8kg/m³ and 32kg/m³ unfaced Knauf Insulation glasswool, with ECOSE binder

### Certification



Please scan the QR Code to view the complete list of certifications on our website.

## KNAUF INSULATION INTERNAL PARTITION

July 2025

### Benefits

- ✓ DriTherm® Technology - silicone treated glasswool for increased durability
- ✓ TwinTech® - smooth finish on both sides
- ✓ High thermal performance - year round comfort
- ✓ Sound absorbing
- ✓ Non-combustible
- ✓ Saves energy - lower energy bills
- ✓ No added formaldehyde
- ✓ Soft to handle and install
- ✓ Compression packed - more product per pack
- ✓ Odourless

### Specifications

#### Steel Frame Partition Walls

Product Code	R-Value (m <sup>2</sup> K/W)	Thermal Conductivity (W/mK)	Density (kg/m <sup>3</sup> )	Thickness (mm)	Width (mm)	Length (mm)	Area per pack (m <sup>2</sup> )	Pieces per Pack
883477	1.3	0.039	11.0	50	600	2700*	16.2	10
882264	1.9	0.040	11.0	75	600	2700*	16.2	10

All densities and dimensions are nominal. \*Folded segments.

## KNAUF INSULATION INTERNAL PARTITION

July 2025

### Additional Information

#### Specification Guide

The internal partition insulation shall be Knauf Insulation internal partition batt \*kg/m<sup>3</sup>, \*mm thick, BRANZ appraised to meet the provisions of the NZBC. The product will be non-combustible, Red List Free as labelled by Declare, Global GreenTag Level A certified, glasswool insulation with high post-consumer recycled glass content and with ECOSE® Technology. It will be manufactured under Quality Assurance Standards ISO 9001:2008 and ISO 14001:2004 by Knauf Insulation and shall be installed in accordance with the instructions issued by them.

\*architect to insert details of products used.

#### Light Commercial Applications

Knauf Insulation internal partition batt is available in a range of thicknesses. Knauf Insulation internal partition batt can improve Rw ratings in wood stud construction by 3 to 5 points and in metal stud construction by 8 to 10 points, depending on the complexity of the wall configuration and the thickness/density. Knauf Insulation internal partition batt can be used for exterior and interior walls, floors, crawlspaces and a variety of ceiling applications. Consider the product is covered by a certificate of equivalence from Marshal Day, meaning it can be easily used in a wide range of systems that call for glasswool products.

#### Specification Compliance

AS/NZS 4859.1: 2018 Materials used in the Thermal Insulation of Buildings and comply with the Building Code of Australia (BCA) requirements: B2 – Durability, E3 – External Moisture, F2 – Hazardous Building Materials, and H1 – Energy Efficiency. The Knauf Insulation: acoustic batt range is an acceptable solution in terms of the New Zealand Building Code. This product is designed for use in timber and metal frame applications in new and existing domestic and commercial buildings.

#### Bio-solubility

The formulation used for Knauf Insulation glasswool insulation has been independently assessed to meet the requirements of the stringent Note Q standard (and is therefore consistent with the highest Australian and New Zealand industry standards), and also assessed by Knauf Insulation against NZ Work-Safe requirements. Knauf Insulation glasswool is classified as a non-hazardous substance in line with the NOHSC: 1008 3rd Edition.

#### Environmental

Knauf Insulation acoustic batt represents no known threat to the environment and comes with GreenTag Level A certification, Declare label and a certified Environmental Product Declaration. Knauf Insulation glasswool has low VOC and benefits from ECOSE® Technology.

#### Proven Performance

- Knauf Insulation glasswool is preferred by professional installers concerned with quality, appearance and productivity.
- Knauf Insulation glasswool has excellent acoustical properties reduce sound transmission in the home when properly installed in walls, ceiling and floor systems.

#### Installation Guidance

When installing wall insulation, it is important to install insulation in accordance with NZS 4246:2016 (bulk thermal insulation – Installation) and Knauf Insulation's instructions.

#### Durability

- Knauf Insulation glasswool is odourless, rot proof, non-hygroscopic, does not sustain vermin and will not encourage the growth of fungi, mould or bacteria.
- DriTherm® Technology – silicone treated for increased durability.

#### Superior Handling

- Highly resilient insulation recovers quickly to full thickness for a snug fit and superior finished aesthetics.
- Consistent quality materials feel good, cut easily and install fast.
- Low dust for easier handling and increased productivity.

#### Convenient Packaging, Easier Handling

- Knauf Insulation glasswool is packaged in a strong, white poly bag that offers excellent protection from abuse, dust and moisture.
- Knauf Insulation glasswool packages feature easy to follow installation instructions.
- MasterBag insulation units (containing multiple packs) ensure reduced handling costs with improved compression – more square metres per MasterBag, more square metres per truck load, fewer trips to the job site and less warehouse space for storage.

#### Superior Service and Support

- Knauf Insulation is focused on providing first class customer service, producing high quality product and 'in full on time' deliveries.
- Knauf Insulation recognises the need to establish, develop and support a professional network of distributors and re-sellers in order to service a growing insulation market.
- Knauf Insulation is committed to providing a comprehensive range of relevant sales and marketing literature and web-based technical information to support specifiers and customers.

#### Corrosion Testing

Corrosion testing evaluates whether a material's chemical composition could cause corrosion. Knauf Insulation's glasswool products have been independently tested and demonstrate that they are non-corrosive ensuring reliable performance.



Knauf Insulation glasswool products made with ECOSE® Technology benefit from a no added formaldehyde binder, which is less energy intensive than traditional binders and is based on rapidly renewable, plant-based materials instead of petro-based chemicals. The technology has been developed for Knauf Insulation's glass and rock mineral wool products, enhancing their environmental credentials without affecting the thermal, acoustic or fire performance. Knauf Insulation glasswool products made with ECOSE® Technology contain no added dyes or artificial colours.

#### Knauf Insulation Ltd

PO Box 512, Silverdale, Auckland, 0944, New Zealand

Customer Service: Tel: 0800 562 834      Technical Advisory Centre: [tech.nz@knaufinsulation.com](mailto:tech.nz@knaufinsulation.com)