

EXPOL THERMASLAB FAMILY – TECHNICAL DATA SHEET


1.0 - Product Overview

EXPOL ThermaSlab (Expanded Polystyrene / EPS) provides excellent compressive strength, moisture resistance, and thermal protection.

Ideally suited for residential applications, **EXPOL ThermaSlab** is a cost effective, easy to install insulation solution that achieves R-values above building regulations.

EXPOL ThermaSlab is available in grades S, M, H, VH and SL, and can be used in:

- Retaining Walls (S Grade)
- Skillion Roof Insulation (S, M H Grades)
- Concrete Floor Insulation (S, H, VH Grades)
- Wall Insulation (SL Grade)
- Cladding Insulation (S and H Grades)

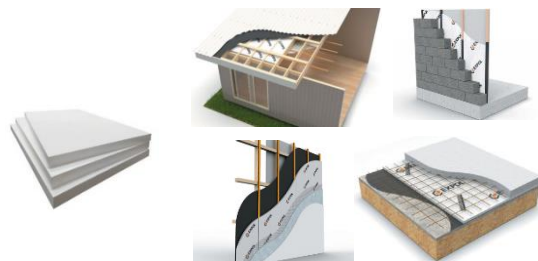

2.0 - Installation

2.1 There are no special requirements for PPE when handling or installing EPS. It is an inert, non-toxic material.

2.2 When transporting, storing or installing, ensure the EPS is not exposed to:

- Petroleum based solvents, or
- Fire, or
- Sustained direct sunlight.

2.3 PVC sheathed electrical cables should not be allowed direct contact with EPS.

2.4 EPS is compatible with all common construction products.

3.0 - Maintenance

3.1 No maintenance required

For further technical information please contact us.

P: +64 9 634 3449 F: +64 9 634 0756 T: 0800 86 33 73 E: tech@expol.co.nz W: www.expol.co.nz

EXPOL THERMASLAB FAMILY – TECHNICAL DATA SHEET

4.0 - Warranty

We believe we manufacture and supply the highest quality UnderFloor, EPS and XPS Foam Insulation products and that is why we stand behind them with some of the best warranties in the industry.

4.1 We provide a 20-year warranty on our EPS Foam Insulation Products – for full warranty details visit www.expol.co.nz/expol-eps-warranty/

5.0 - Compliance with the New Zealand Building Code

EPS, when installed and maintained in accordance with the requirements outlined in this technical data sheet, will meet or contribute to meeting the following provisions of the New Zealand Building Code:

- 5.1 Clause B2 Durability, performance B2.3.1 (a), B2.3.1(b)
- 5.2 Clause E3 Internal moisture performance E3.3.1
- 5.3 Clause F2 Hazardous building materials performance F2.3.1(a)

EXPOL EPS is not subject to a warning or ban under the Building Act 2004.

6.0 - Quality Assurance

- 6.1 BRANZ, H1 Energy efficiency performance H1.3.1(a), H1.3.2(e)

For further technical information please contact us.

P: +64 9 634 3449 F: +64 9 634 0756 T: 0800 86 33 73 E: tech@expol.co.nz W: www.expol.co.nz

EXPOL THERMASLAB FAMILY – TECHNICAL DATA SHEET

7.0 - Technical Data

Properties	Test	SL	S	M	H	VH
Material	Expanded Polystyrene					
Density		12 kg / m ³	16 kg / m ³	20 kg / m ³	24 kg / m ³	28 kg / m ³
Sheet Size	2400 mm x 1200 mm					
Thickness / R Value	10mm	-	-	-	-	-
	20mm	-	R 0.53	R 0.54	R 0.56	R 0.57
	25mm	-	R 0.66	R 0.68	R 0.69	R 0.71
	30mm	-	R 0.79	R 0.81	R 0.83	R 0.88
	35mm	-	R 0.92	R 0.95	R 0.97	R 1.00
	40mm	-	R 1.05	R 1.08	R 1.11	R 1.14
	45mm	-	R 1.18	R 1.22	R 1.25	R 1.29
	50mm	-	R 1.32	R 1.35	R 1.39	R 1.43
	55mm	-	R 1.45	R 1.49	R 1.53	R 1.58
	60mm	R 1.46	R 1.58	R 1.62	R 1.67	R 1.71
	65mm	R 1.59	R 1.71	R 1.76	R 1.81	R 1.86
	70mm	R 1.71	R 1.84	R 1.89	R 1.94	R 2.00
	75mm	R 1.83	R 1.97	R 2.03	R 2.08	R 2.20
	80mm	R 1.95	R 2.11	R 2.16	R 2.22	R 2.29
	85mm	R 2.07	R 2.24	R 2.30	R 2.36	R 2.43
	90mm	R 2.20	R 2.37	R 2.43	R 2.50	R 2.57
	95mm	R 2.32	R 2.50	R 2.57	R 2.64	R 2.72
	100mm	R 2.44	R 2.63	R 2.70	R 2.78	R 2.86
	110mm	R 2.68	R 2.89	R 2.97	R 3.06	R 3.14
	120mm	R 2.93	R 3.16	R 3.24	R 3.33	R 3.43
Thermal Conductivity	ATSM 168	K – Value 0.41	K – Value 0.038	K – Value 0.37	K – Value 0.036	K – Value 0.035
Rate of water vapour transmission (max) measured parallel to rise at 23 deg C	AS 2498.5	630 mg/m ² s	520 mg/m ² s	520 mg/m ² s	460 mg/m ² s	400 mg/m ² s
Permeability m/s	-	-	-	-	-	-
Compressive Resistance KPA at 1%	AS 2498.3	- KPA	34 KPA	49 KPA	64 KPA	88 KPA
Compressive Resistance KPA at 2%		- KPA	59 KPA	96 KPA	108 KPA	142 KPA
Compressive Resistance KPA at 5%		- KPA	74 KPA	111 KPA	133 KPA	172 KPA
Compressive Resistance KPA at 10%		70 KPA	84 KPA	126 KPA	146 KPA	189 KPA
Youngs Modulus	-	- MPA	3.8 MPA	4.1 MPA	6.2 MPA	8 MPA
Cross breaking strength KPA	AS 2498.4	135 KPA	165 KPA	200 KPA	260 KPA	320 KPA
Dimensional stability of length, width & thickness (max) at 70 deg C for 7 days	AS2498.6	1%				
Long term water absorption by immersion	ASTM C72	- %v / v				
Determination of flame propagation surface ignition Medium flame duration (max) Eighth vale	AS2122.1- 1993	2 sec 3 sec				
Fire behavior Spread of flame index (0 – 10) Smoke developed index (0 – 10)	AS/NZS 1530.3:1999	0 5				
Recycled Content		30%	5%	0%	0%	0%
Recyclability	EPS is 100% recyclable					
Environmental Statement	EPS is inert and non-toxic. There are no chemicals or gases harmful to the environment emitted from EPS either during manufacture or within use.					
Ozone Depleting Potential	EPS does not contain ozone-depleting CFC or HCFC gases, nor use them in its manufacture. As a result, EPS has zero ozone depletion potential.					
Vermin Resistance	EPS does not offer any nutritive value.					

For further technical information please contact us.

P: +64 9 634 3449 F: +64 9 634 0756 T: 0800 86 33 73 E: tech@expol.co.nz W: www.expol.co.nz