


## Fixture / Socket Detail

### Top View

Fixture can rotate 360°



**Lens Options**  
16°, 24°, 30°

### LED Color Options

**Color: 2700K**  
Power: 1.2 watt / LED  
Voltage: 5 VDC  
Output:  
16° Lens / 97 Lm  
24° Lens / 97 Lm  
30° Lens / 80 Lm


**Color: 3000K**  
Power: 1.2 watt/LED  
Voltage: 5 VDC  
Output:  
16° Lens / 97 Lm  
24° Lens / 97 Lm  
30° Lens / 80 Lm

**Color: 4000K & 5000K**  
Power: 1.2 watt/LED  
Voltage: 5 VDC  
Output:  
16° Lens / 105 Lm  
24° Lens / 105 Lm  
30° Lens / 85 Lm

### Finish Options

Silver (S)  
Black (B)

Standard lengths  
30, 150, 250 and 350 mm  
(Custom lengths available  
on request)

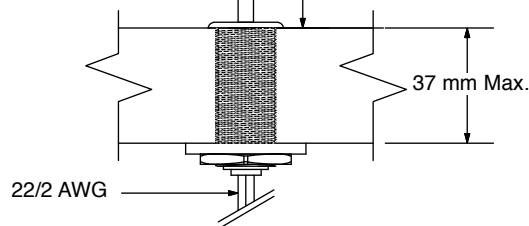

## How To Specify

Catalog# MSP-XXXX - XXD - X - XXX


**LED Color**  
2700  
3000  
4000  
5000

**Lens Optics**  
16  
24  
30

**Finish**  
S - Silver  
B - Black

**Stem Length**  
(In mm)




## Power Supply & Distribution Box

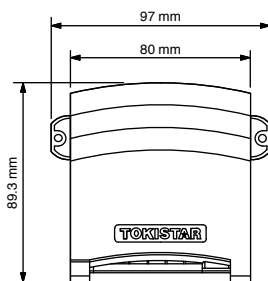

### Power Distribution Box

**Catalog#: LPS-350-6CH**  
Input: 5 VDC  
Output: 350mA x 6 channel  
Output Rating: Max. 10.5 Watt


**Catalog#: LPSDM-350-6CH**  
Features Optional 0-10 VDC Dimming  
or Self-Dimming Dial

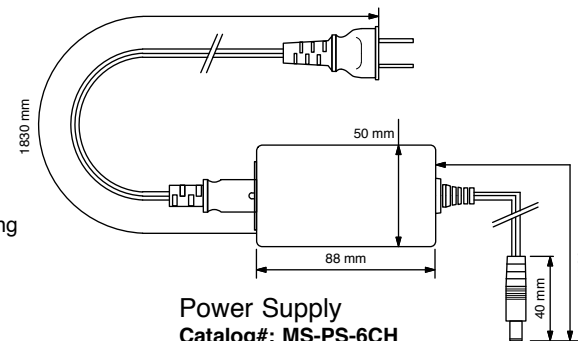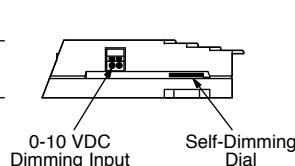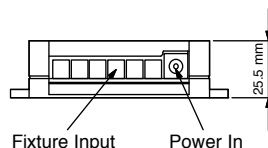

### Power Supply

**Catalog#: MS-PS-6CH**  
Input: 100-240VAC 47/63Hz  
Output: 5 VDC  
Output Rating: 4A 20W Max

## Wiring Detail

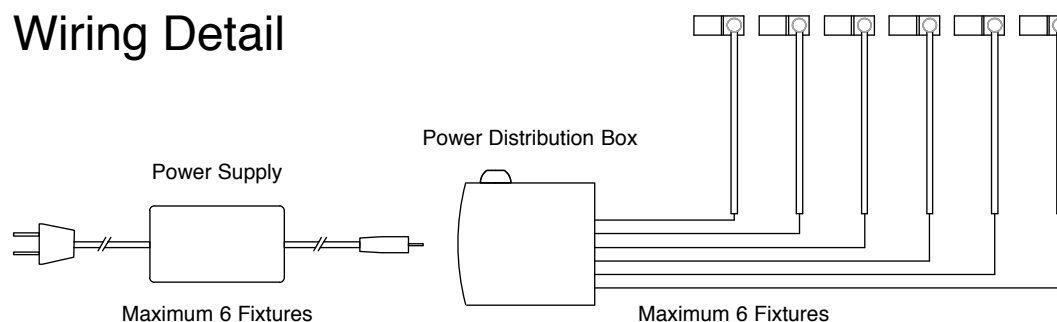

### TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE  
ANAHEIM, CA 92801  
TEL: 714 772 7005 FAX: 714 772 7014  
email: info@tokistar.com Website: tokistar.com

Description: Micro Spotlight Detail

Date: October 7, 2020

Scale: NTS

Drawing #: 100720-RCB

Drawn By: R. Cordova