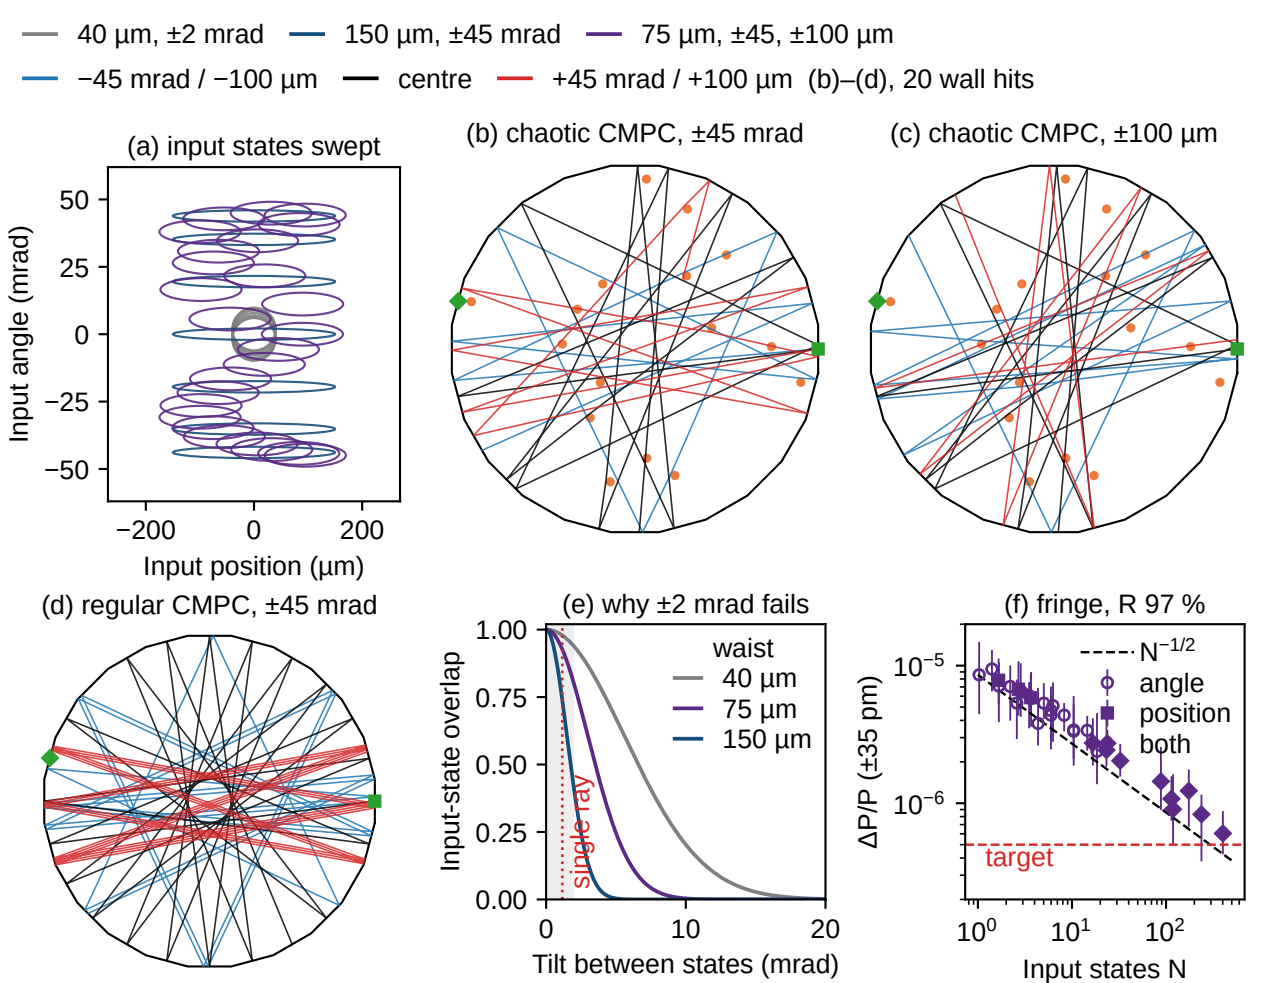
40 µm, ±2 mrad
150 µm, ±45 mrad
75 µm, ±45, ±100 µm
−45 mrad / −100 µm
centre
+45 mrad / +100 µm
(b)–(d), 20 wall hits
(a) input states swept
Input angle (mrad)
Input position (µm)
(b) chaotic CMPC, ±45 mrad
(c) chaotic CMPC, ±100 µm
(d) regular CMPC, ±45 mrad
(e) why ±2 mrad fails
Input-state overlap
Tilt between states (mrad)
waist
40 µm
75 µm
150 µm
single ray
(f) fringe, R 97 %
ΔP/P (±35 pm)
Input states N
N−1/2
angle
position
both
target