


SHOOTER

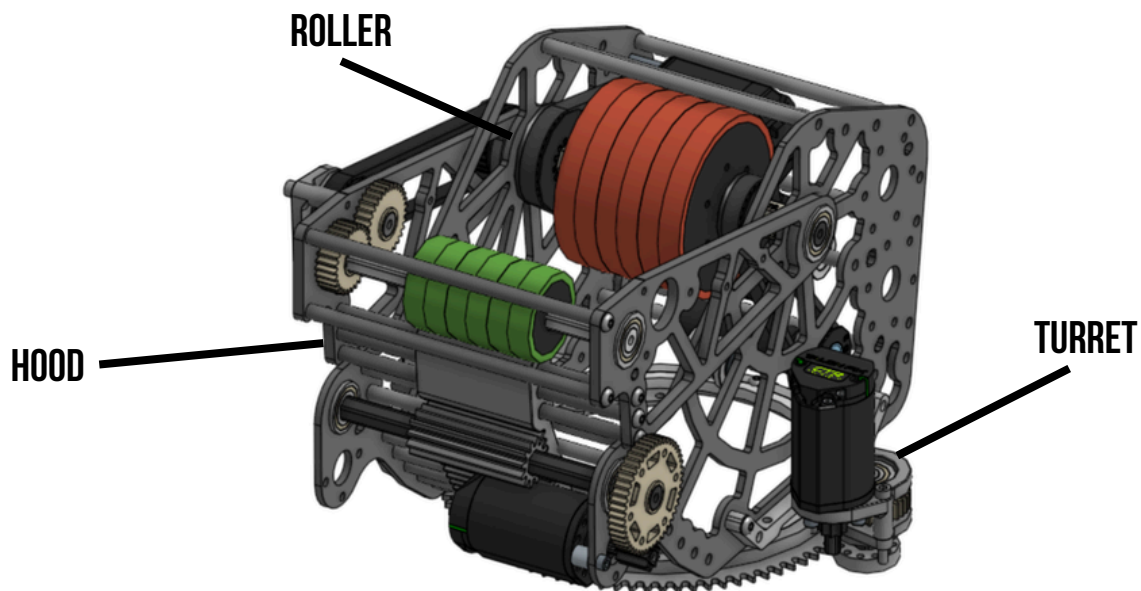

The shooter shoots the fuels to the hub. It contains the minindexer to transfer balls, the main flywheel for shooting, a hood to change its angle of shooting and a turret that help aiming at the target quickly. It **automatically adjust** its angle at different places to provide quick and precise shot.

Structure

- Built with 0.2" **aluminum plates** and 0.2" movable aluminum plates, connected by 0.3" aluminum rods.
- **Hood** angle is adjusted using a set of spur gears.
- Shooter is mounted on the outer side of the **turret** bearing.
- A **pinion** engages with a gear plate fixed on the inner side of the turret bearing to enable turret rotation.

Rollers

- A 4" **Stealth wheel** serves as the main flywheel, driven by a belt and pulleys (24T to 33T).
- A 2" **Stealth wheel** at the back is also belt-driven.

Deploy

- 2X **Kraken X60** motors drive the rollers.
- 2X **Kraken X44** motors control the hood and turret.