RICA - Radio Imaging Combination Analyzer

MILES LUCAS^{1, 2}

¹ Iowa State University, Ames, Iowa

²National Radio Astronomy Observatory, Socorro, New Mexico

ABSTRACT

1. INTRODUCTION

In radio synthesis imaging a common problem arising from interferometry is the lack of zero-spacing data. Without this data, images lack total power information. Single dish radio telescopes retain this total power imformation but lack the angular resolution capabilities of radio interferometers. To solve this problem, astronomers combine the interferometry data with the total power data. This report seeks to characterize the effectiveness of different combination methods and parameters.

The parameters analyzed were multiscale deconvolution versus normal Hogbom deconvolution, the effect of single-dish size on the combination, masking, and number of total iterations (i.e. depth of clean). One of the previous assumptions is that if the single-dish UV-coverage does not adequately complement the inteferometer UV-coverage, feathering will not be effective. Another assumption is that simple point structures should not see much discrepency in parameters or methods. Therefore, more complex, fluffy structure ought to show more distinction in results.

There are four methods of combination that were tested. The first is CASA¹'s feather task. This takes the total power image and gets the Fourier components of the total power image. These components are then added to the interferometer data. The addition is weighted such that the total power components have all of the weight near the zero-spacing and taper off so that at around a third

5

9

10

11

12

13

14

15

16

17

18

19

¹ https://casa.nrao.edu

of the max UV distance the interferometer has all the weighting. This smooth combination helps to avoid weird artifacting from either component of the combination.

The next method is using the total power image as the starting model in CASA's tclean task. In the Cotton-Schwab CLEAN algorithm (CSCLEAN), each major-cycle begins with a blank model image and constructs an image on it by using minor-cycle iterations. By using a starting model, this model is no longer blank, but is passed as a parameter. By using the total power image as the starting model, we can hope to retain the total power information through the CLEAN algorithm.

Another modification to the Cotton-Schwab cycle in order to combine images is by doing a modified joint deconvolution. In each major Cotton-Schwab cycle, the visibilites are gridded and inverse Fourier transformed to create an image residual, which is then feathered with the total power residual before deconvolving. The deconvolved model is then convolved with the single-dish beam and subtracted from the previous single-dish residual. The deconvolved model is also Fourier transformed, degridded, and subtracted from the visibilites to create a new residual image These residuals are then degridded and transformed to finish the major cycle. See Figure 1 for a visual flowchart of the process.

The last method of combination we use is $tp2vis^2$, which takes the total power image and spoofs a measurement set. The way tp2vis accomplishes this is by taking Fourier data from the total power image and sparsely sampling the Fourier data at close spacings (see Koda et al. 2011). This data can be concatanated with the interferometer data and deconvolved in tclean. Figure 2 shows how the single-dish is simulated and concatanated with the interferometer data. This should help fill the close-spacing gap created by the interferometer data and subsequently help increase total power information.

2. METHODS

² https://github.com/tp2vis/distribute

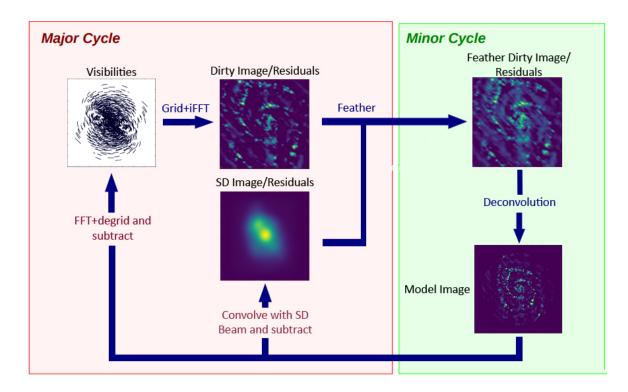


Figure 1. A flow chart describing the joint-deconvolution approach to combining interferometer and single dish data. Adapted from Rau, U. & Naik, N. 2018 (in prep).

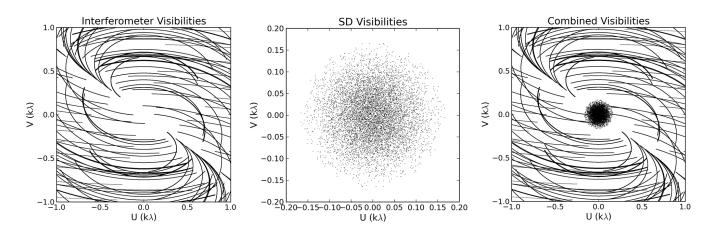


Figure 2. A look at how the visibilites are added through using tp2vis for a model simulated on the VLA A configuration. In the center of the interferometer image in the first plot shows sparsity that is filled in on the third plot. The second plot shows the approximation tp2vis makes of the single dish.

In order to evaluate the different combination methods, a metric needed to be created and tested on a suite of models. The metrics used were CLEAN residuals, fidelity images, and a ratio of the power spectrum densities (PSD). The fidelities are given Equation 1

44

45

46

$$Fidelity(i, j) = \frac{|Model(i, j)|}{\max(|Difference(i, j)|, 0.7 \times rms(Difference))}$$
(1)

where model is the reference image and diff is the difference between the test and reference images (Pety et al. 2011, p.19). The exigence for using PSDs is that the zero-spacing power is readily visible for every image. By using these ratios, the closer the ratio is to 1.0 at short spacings (when compared to the true model), the more accurate the combination. In addition, when compared with the total power image, it shows how much effective weight is given to the total power image in the combination.

The ratio of the PSDs is given by Equation 2

$$Ratio(UV) = \frac{Power_{test}(UV)}{Power_{ref}(UV)} \cdot \frac{BA_{ref}}{BA_{test}}$$
(2)

where Power is the power from the PSD, BA is the beam area, ref refers to the reference image (model or SD), and test refers to whichever image is being tested.

Each combination was compared to both the true model and the single dish, total power image. Many models were tested with various extra parameters. Three models were generated from component lists. One has 4 point sources, one has a single Gaussian source, and one has a mixture of 4 point sources, one very broad Gaussian, and on off-center, stronger Gaussian. There were also various models based off real structure, including M51 (based off an H- α image), Orion, RXJ1347, and a protoplanetary disk (PPD) simulation. Figure 3 shows all of the models. It is important to note that these models have been regridded onto a common coordinate system that is not representative of the true astronomical targets. This was in effort to simplify the simulation process for creating measurement sets.

The code base for testing the effectiveness is hosted publicly for anyone to use³. In the source code there are many scripts and methods to facilitate simulating, combining, and comparing. Every model is described in $src/_models.py$ with a dictionary defining the simulation and tclean parameters. The pipeline for testing these models was as follows:

³ https://gitlab.com/mileslucas/rica

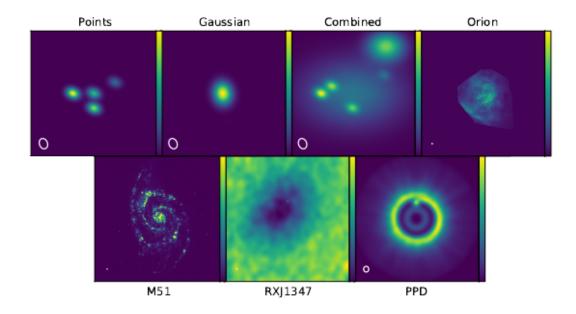


Figure 3. The models used for testing combination methods convolved with some restoring beam to show structure better.

- 1. Simulate measurement set (MS) based on VLA configurations
- 2. Simulate single dish image by convolving model with Gaussian
- 3. Image the MS

71

72

73

74

75

76

77

78

79

- 4. Do the combinations (feather, startmodel, joint deconvolution, and tp2vis)
- 5. For each combination, do a comparison with the true model (convolved with the restoring beam) and the single dish image
- and is implemented in src/pipeline.py.

2.1. Simulations and Deconvolution

All simulations were done using the VLA for the telescope model except for the PPD simulation, which was done using *simalma* and was only simulated once. Each test model could define which of the VLA configurations to use, from A, B, BnA, C, CnB, D, and DnC. The spectral window for the simulations mimic the C-band at 4.5 GHz to 5.5 GHz (central 5 GHz) with 101 channels at 10 MHz intervals. The field observed was J2000 21h28m31.0 45°0′0.0″. The observation date and time was

2018/06/01 at 12:00:00.0 UTC. The integration time was 10 s each with a total of 30 000 s. Finally, the data was corrupted with 1 mJy of simple noise.

The single dish images were created by taking the true model and convolving with a Gaussian equivalent to the single dish beam at the given frequency.

$$FWHM(\nu, D) = \frac{3.66 \times 10^8 \,\mathrm{m \, s^{-1}}}{\nu \cdot D} \tag{3}$$

Equation 3 gives the Gaussian kernel full-width half-maximum (FWHM) in radians for a frequency in Hz and dish diameter in meters. For instance, to simulate data from the Green Bank Telescope (GBT) with a dish diameter of 100 m at 5 GHz gives a FWHM of 2'31", which is in agreance with values from the GBT proposer's guide⁴. Note that this is not the most accurate equation for other telescopes, because there is a constant involved in this equation based off the taper-length of the telescope's feedhorns. In addition, these single dish images have 5×10^{-6} uniform noise added.

Each model defines its own paramaters for cleaning. Appendix A lists every single parameter for each model. As a default, a model simulated in VLA D configuration has an image size of 64 with a cell size of 7.0". The restoring beam for the D configuration is approximately 20.41" by 15.60" so the cell accounts for half to a third of the beam width. In general, deconvolutions were done with very high numbers of iterations, relying on a threshold to stop the algorithm for consistency. This differs for the models tested at explicitly different cleaned levels.

2.2. Comparisons

Each comparison was ran with the same clean parameters for consistency. Because feather does not actively clean, it has its own set of parameters, but all of the models tested used the default parameters. After all the combination permutations were imaged, they were compared against the true model convolved with the restoring beam and the single dish image alongside the uncombined interferometer image. All of the ratio were saved into individual CSV files for further analysis. In

⁴ p.9, https://science.nrao.edu/facilities/gbt/proposing/GBTpg.pdf

all, each model has 10 comparisons (5 agains the models and 5 against the single-dish images) and 4 separate cleans to perform.

In order to run a new model to test comparison methods, there are two general methods. If there exists a true model, simply add an entry to the models dictionary defining the simulation and clean parameters. It is also important to edit src/simulate.py to accomadate the new model. Follow the existing code base for guidance. It is also important to create a copy of the model and regrid it to the common coordinate system (use an existing model to snag the coordinate system). The model can then be ran through the pipeline along with any other models using src/pipeline.py.

If there is no true model, it is still useful to test and compare against the total power image, alone. In this case, using a cleaned image, a measurement set, and a total power image with the src/combine.py script will produce all of the combinations. These can then be compared using src/compare.py. It is possible to edit src/pipeline.py to accomadate special models, see how the PPD model is handled in the pipeline.

3. RESULTS

4. CONCLUSION

This work was funded by the National Science Foundation in partnership with the National Radio Astronomy Observatory and Associated Universities Incorporated. Thank you to Dr. Kumar Golap and Dr. Takahiro Tsutsumi for their guidance and assistance.

REFERENCES

121 Koda, J., Sawada, T., Wright, M. C. H., et al. 124 Pety, J., Gueth, F., & Guilloteau, S. 2011, ALMA 122 2011, ApJS, 193, 19, 125 Memo #398 Impact of ACA on the Wide-Field 123 doi: 10.1088/0067-0049/193/1/19 126 Imaging Capabilities of ALMA, Tech. rep.

APPENDIX

A. MODEL PARAMETERS

Table 1. The parameters for every model ran through the pipeline

Cyclemest unestion deconvolver scales mask
) 100 $1e-5Jy$
7.00arcsec 100000
1 A 177

Table 1 continued on next page

mask	Yes	$N_{\rm o}$	$ m N_{o}$	Yes	$_{ m O}$						
scales		[0, 3, 10, 50]					[0, 3, 10, 30]				
cycleniter threshold deconvolver	hogbom	multiscale	hogbom	hogbom	hogbom	hogbom	$\operatorname{multiscale}$	hogbom	hogbom	hogbom	hogbom
threshold	1e-9Jy	1e-9Jy	1e-6Jy	1e-6Jy	1e-7Jy						
cycleniter	100	400	400	100	100	100	400	400	100	100	100
niter	1000	100000	100000	0	100	1000	100000	100000	100000	100000	100000
cell	$0.65 \mathrm{arcsec}$	2.12arcsec	$0.20 \mathrm{arcsec}$	$0.20 \mathrm{arcsec}$	0.01arcsec 100000 100						
imsize	[700, 700]	[700, 700]	[700, 700]	[700, 700]	[700, 700]	[700, 700]	[700, 700]	[216, 216]	[2268, 2268]	[2268, 2268]	[192, 192]
Config SD size	100 m	100 m	25 m	25 m	25 m	25 m	25 m	100 m	100 m	100 m	ACA
Config	VLA b 100 m	VLA b 100 m	VLA b 25 m	VLA b 25 m	VLA b 25 m	VLA b 25 m	VLA b 25 m	VLA c 100 m	VLA a	VLA a	ALMA ACA
Model	orion	orion	RXJ1347	RXJ1347	pdd						
Name	orion-b-n1000	orion-b-ms	orion-b-25	orion-b- 25 -n 0	orion-b-25-n100	orion-b-25-n1000	orion-b-25-ms	orion-c	RXJ1347	RXJ1347-masked RXJ1347 VLA a $100 \mathrm{m}$	pdd