

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X5		2025.03.03	

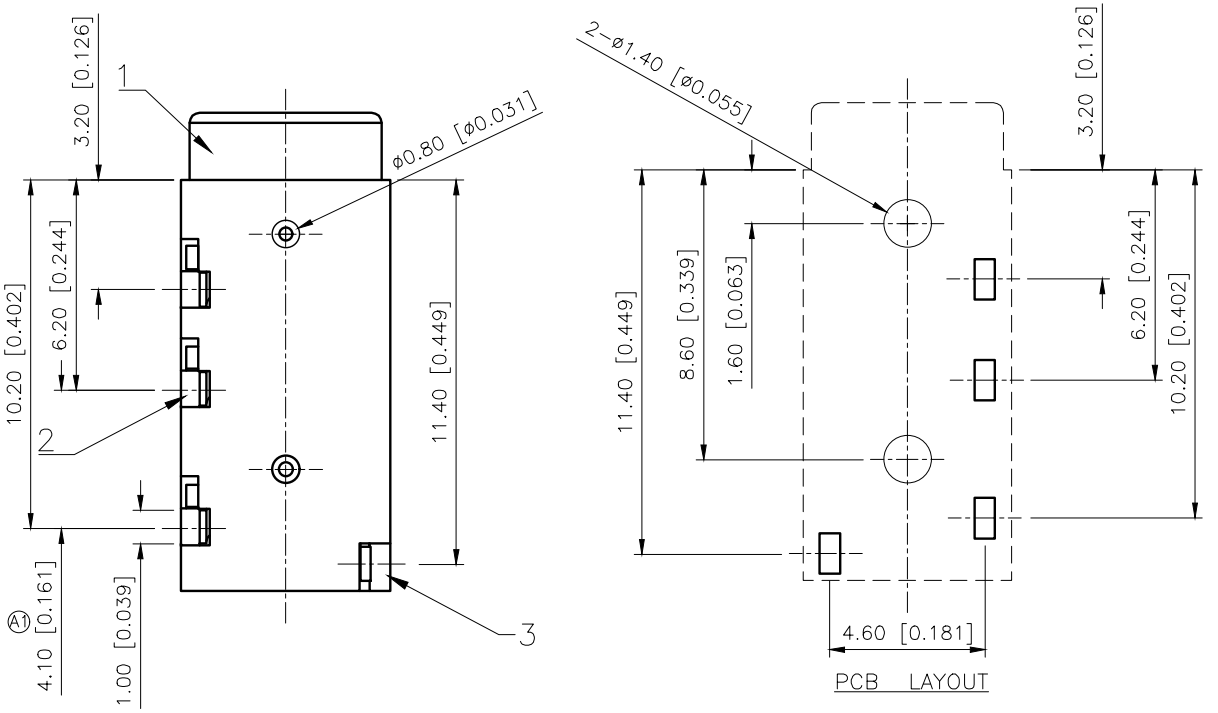



PCB LAYOUT

SHCEMATIC



Specifications( )
1.Rated electrical load( ): 30V 0.5A
2.Contact resistance( ):≤30mΩ Max
3.Insulation resistance( ):≥100MΩ Min
4.Withstanding voltage( ):≥500V AC/minute
5.Insertion and extraction force 3~20N
6.Mating cycles 5000 cycles Min

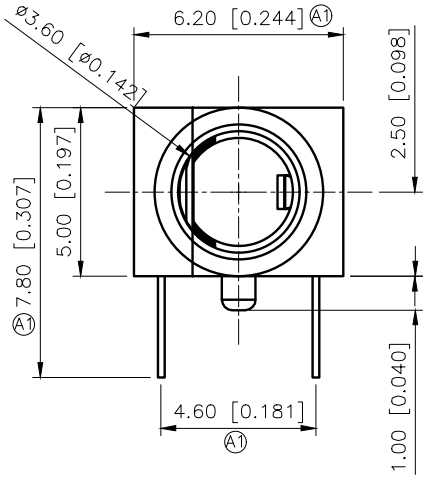

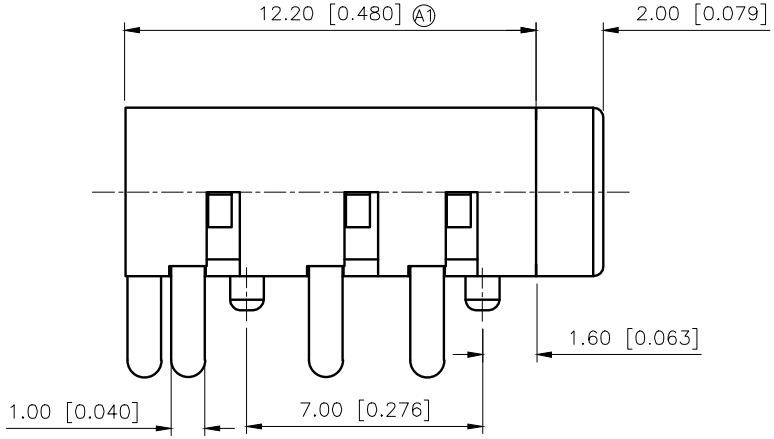

NO	NAME	QTY	MATERIAL	Remark
3	Contact piece 1	1	QSn6.5-0.1 Tin bronze band δ=0.20mm	Tin-Plated
2	Reeds 3	1	QSn6.5-0.1 Tin bronze band δ=0.20mm	Tin-Plated
1	Pedestal 1	1	PA	Black

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection 星坤

DESIGN		VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-320A
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1