

High pressure unit LubiCool

KNOLL
.It works

Issue 08-2018



Properties

Compact and mobile

Plug-and-Play

High pressure up to 150 bar

Effective filtration via belt filter

Wear-resistant screw spindle pump

Demand-driven pump control

Attractive price-performance ratio

Benefits

Space-saving and flexible installation

- Fast installation

- Easy retrofitting

- Short-breaking chips

- Reduced processing times due to higher cutting speeds

- Extended tool life

- Reduced concentration of ultra-fine particles

- Long service life of components and the cooling lubricant (CL)

Long service life and process reliability

- Lower energy costs

- Lower heat development

- Longer durability

Short amortization time

Areas of application

The KNOLL high pressure unit LubiCool is a mobile high pressure unit for machine tools, particularly fixed- and sliding headstock automatic lathes. The system cleans the CL and provides the machine with high pressure.


It is suitable for

- demanding machining processes
- deep hole drilling in one move
- processing with difficult materials (e.g. high-alloyed steel, titanium, copper, bronze)
- original equipment and retrofitting

Description

1. The transfer pump pumps the dirty CL from the machine tool into the compact filter.
2. The compact filter separates chips and the soiling from the CL, which flows in the clean media tank.
3. The dirty fleece is collected in the sludge container.
4. The high pressure pump provides the machine tool with cleaned CL through swichable outputs.
5. The integrated touchpad allows the control and visualization of the most important system parameters.

Functional scheme

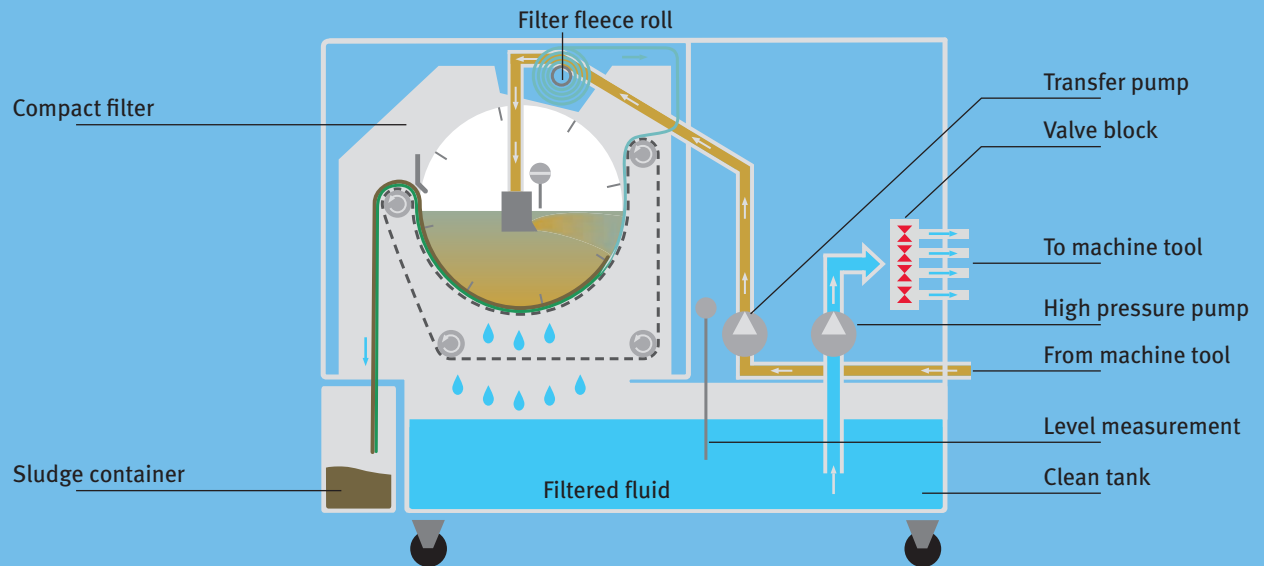


Pump characteristic curve

With the optional frequency control, every point within the diagram in the light blue area is possible.

Layout example:

Media: Oil
 Viscosity: 20 mm²/s
 Pressure: 120 bar
 Delivery rate: 15 l/min

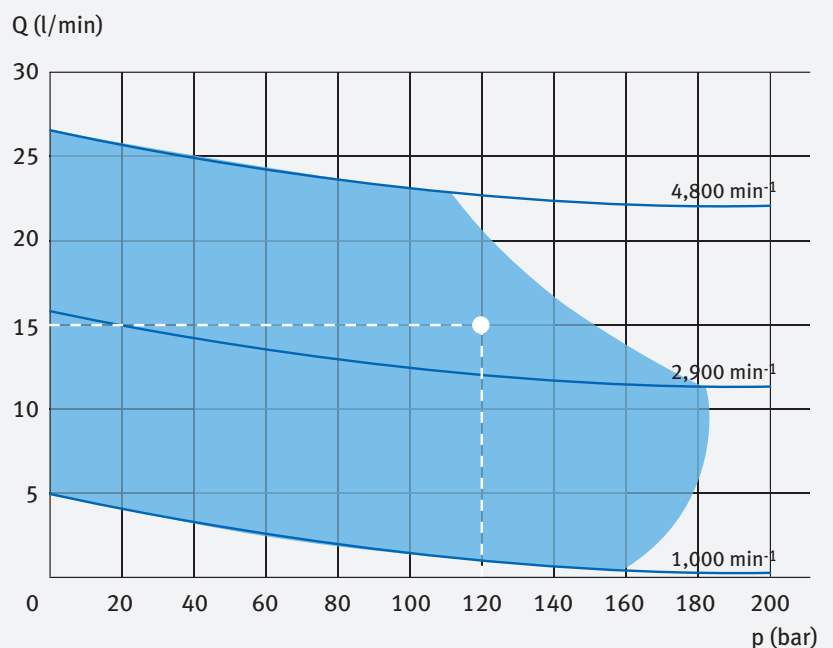

Equipment

Paneling	●
KNOLL Compact filter KF (with filter fleece)	●
KNOLL Screw pump KTS	●
Transfer pump	●
KNOLL-SmartConnect control incl. touchpad and LED-status light	●
Interface cables (individual)	●
Clean tank	●
Sludge container	●
4 swichable outputs	●
4 additional swichable outputs	○
Frequency inverter	○
Cooling (Continuous flow cooler or plate heat exchanger)	○
WHG-Sensor	○
Hose set	○
Pressure reduction for spindle flushing	○

● Standard equipment
 ○ Option

KNOLL Maschinenbau GmbH

Schwarzachstraße 20

DE-88348 Bad Saulgau

Tel. +49 7581/2008-0

Fax +49 7581/2008-90140


info.itworks@knoll-mb.de

www.knoll-mb.com

www.lubicool.com

LubiCool

Dimensions

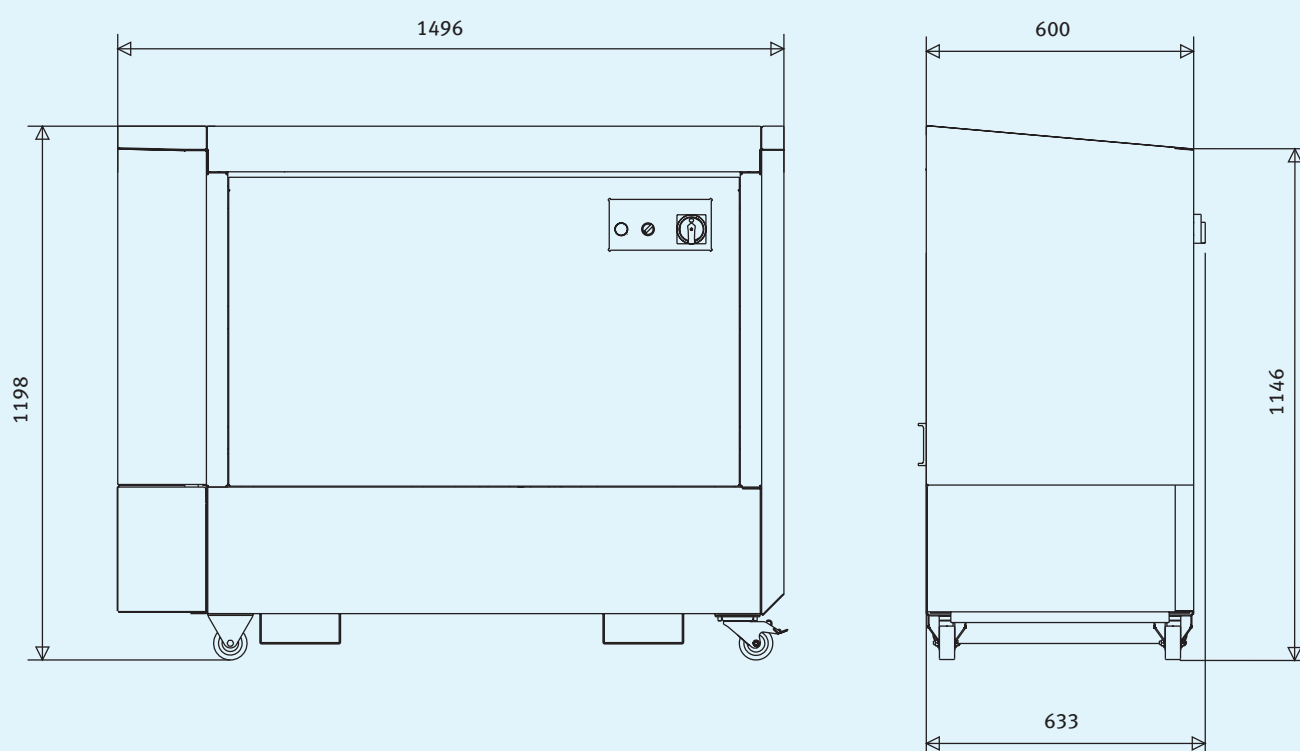

Technical Data

Connected load high-pressure pump	5.5 kW
Connected load transfer pump	0.63 kW
Pressure range	up to 150 bar
Volumetric flow	up to 27 l/min
Filter fineness	up to 20 µm
Cooling lubricant	Emulsion, Oil
Power supply	400 V / 50 Hz
Tank capacity	150 l
Dimensions (L x W x H)	1496 x 600 x 1198 mm