

PROJECT 1 - NETWORK TOPOLOGY

FortiGate Provides:

- Internet Access
- Firewall Policies
- Web Filtering
- Inter-VLAN Control
- SSH Access to ASR

Device Management Access


- FortiGate GUI:
<https://192.168.10.99>
(via VLAN 10)
- Switch GUI:
<http://192.168.10.200>
(via VLAN 10)
- ASR Access:
SSH from Dell (VLAN 10)
to 192.168.30.10 (VLAN 20)

Firewall Policies (FortiGate)

- VLAN 10 → VLAN 20 : ALLOW (All)
 - VLAN 20 → VLAN 10 : DENY (All)
 - VLAN 10 → Internet : ALLOW
 - VLAN 20 → Internet : ALLOW
-
- Facebook / Social Media : BLOCK
(Web Filter + QUIC Block)

Notes

- Dell is in VLAN 10
- Mac and ASR are in VLAN 20
- Traffic from VLAN 20 to VLAN 10 is blocked by firewall
- SSH is used to manage ASR from Dell
- All devices get Internet access through FortiGate
- Inter-VLAN routing is handled by FortiGate (VLAN Interfaces)

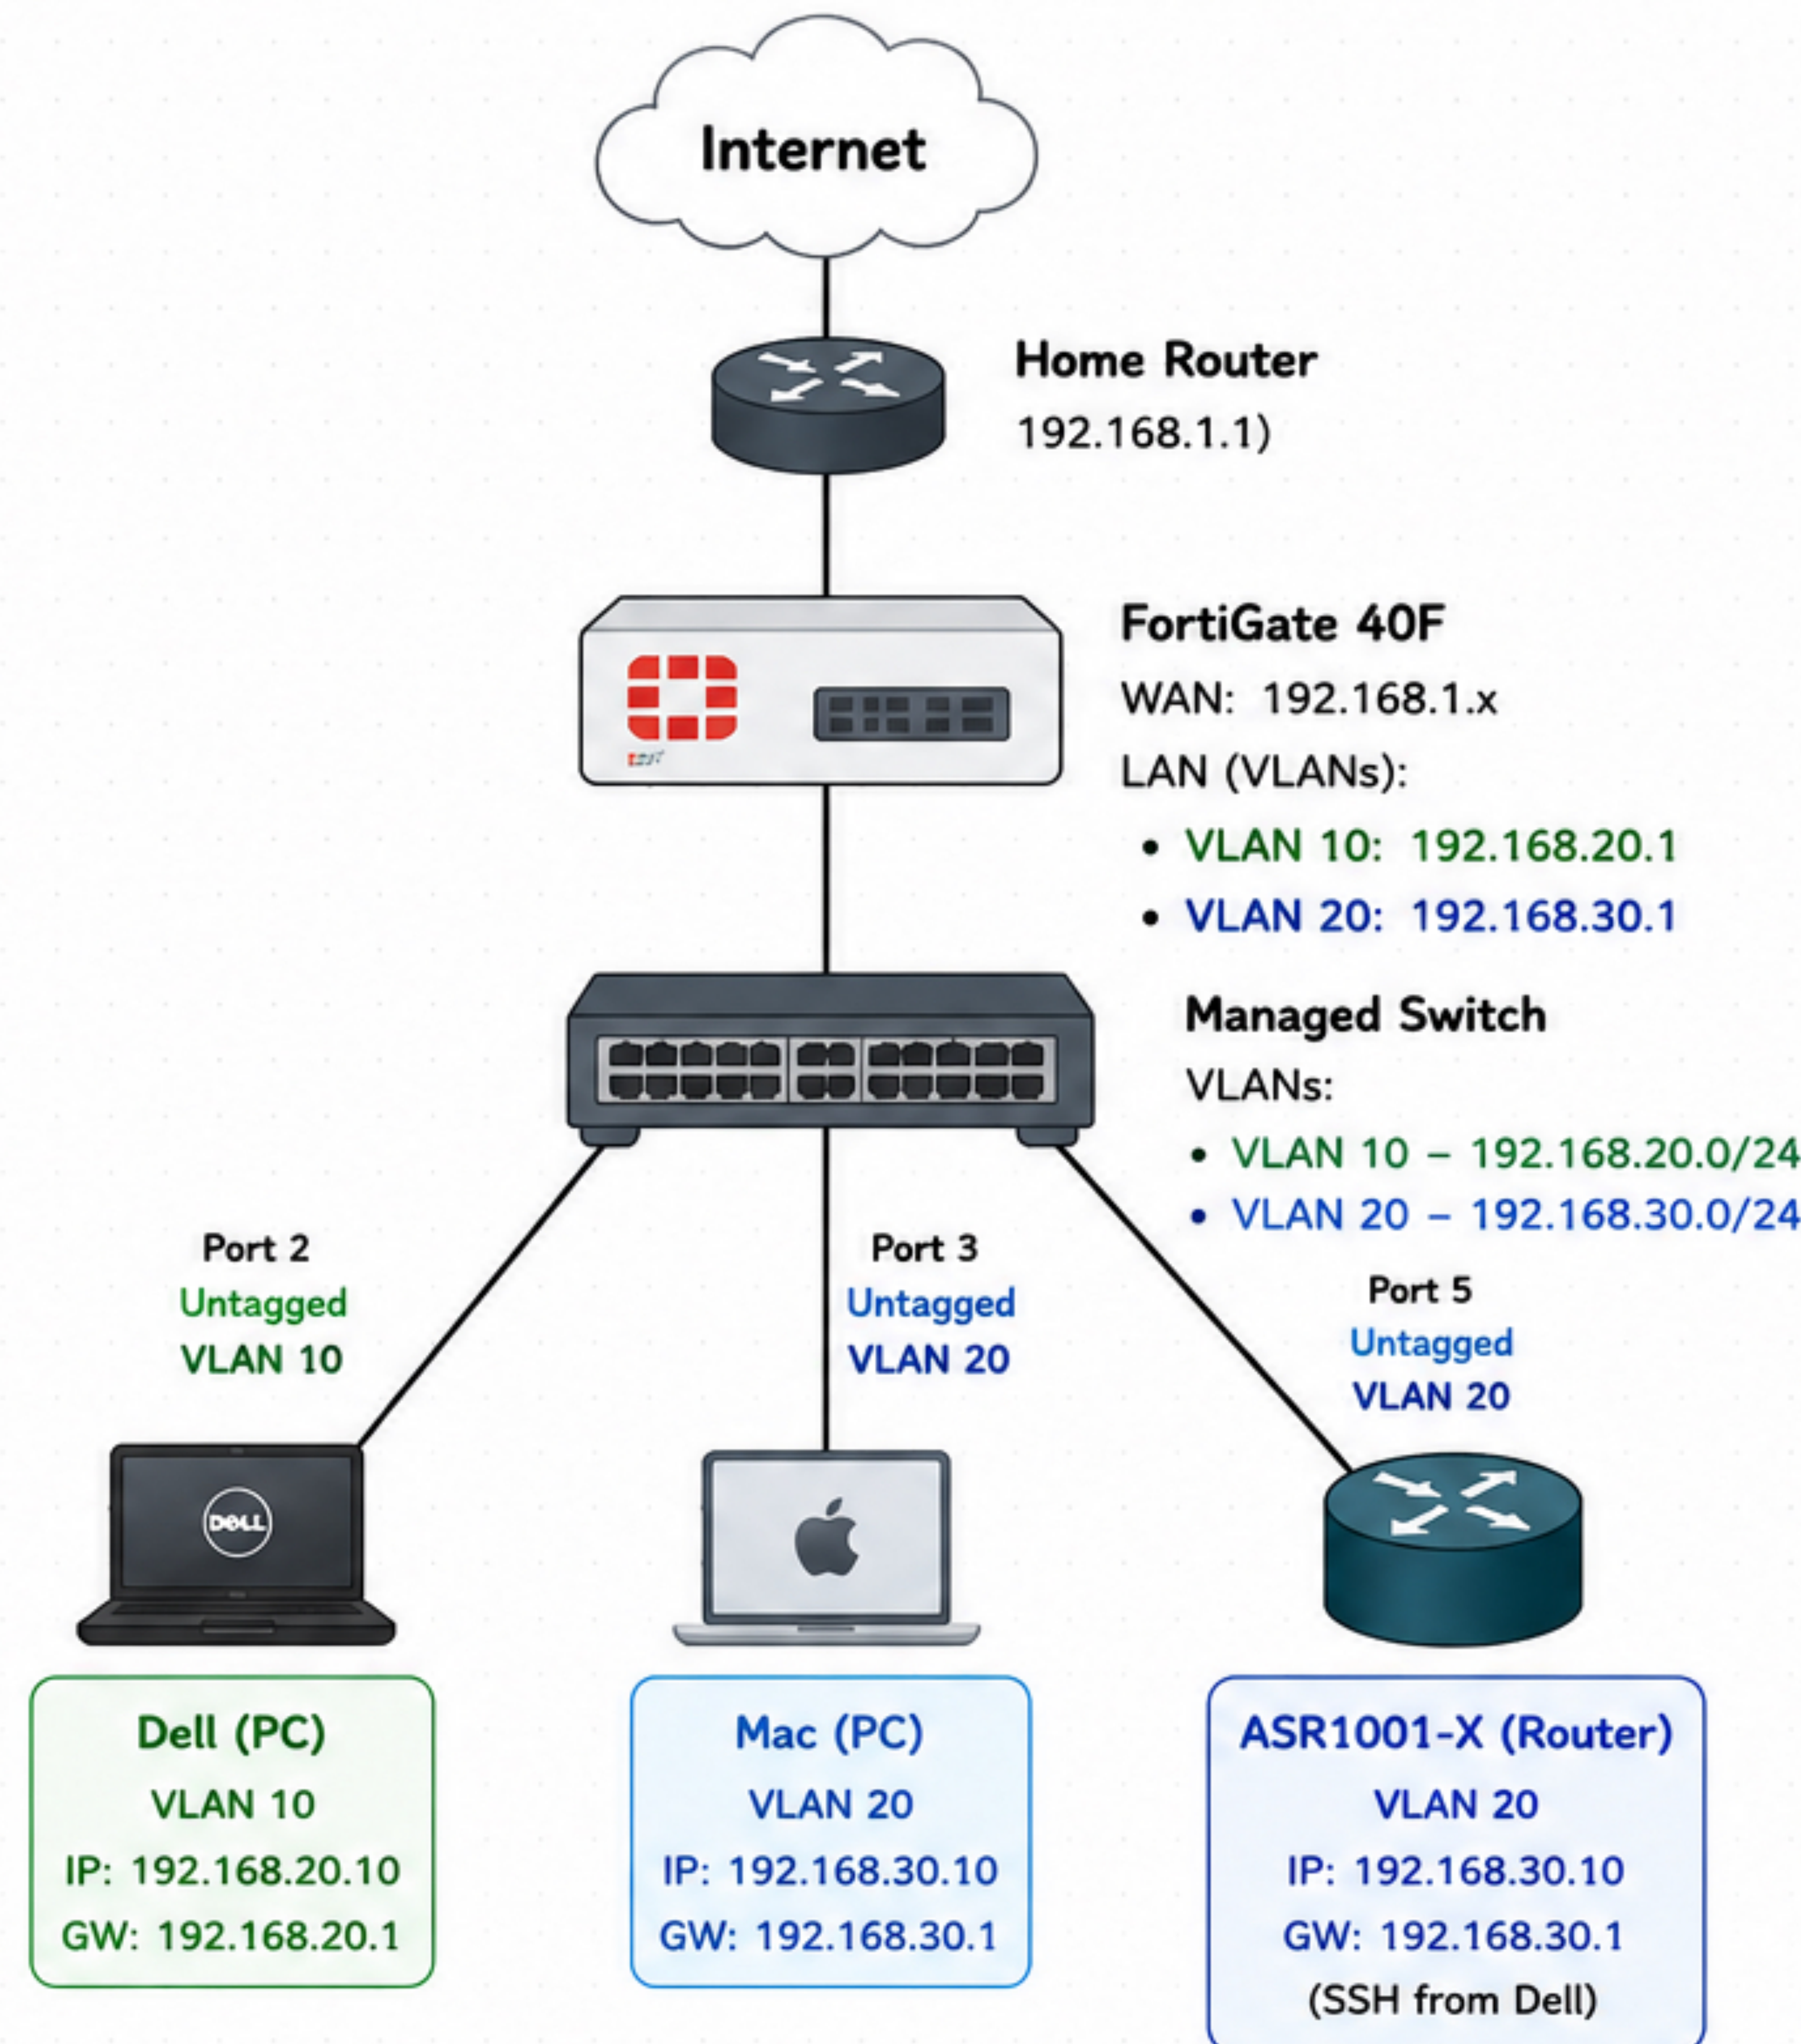

Legend

- Ethernet Connection
- Unoc tagged Port (Access)

- VLAN 10 (Users)
- VLAN 20 (ASR + Mac)

Project-1-FortiGate VLAN
Security & Python Automation
Lab

IP Addressing Summary			
Device	VLAN	IP Address	Default Gateway
FortiGate VLAN 10 Interface	VLAN 10	192.168.20.1	-
FortiGate VLAN 20 Interface	VLAN 20	192.168.30.1	-
Dell (PC)	VLAN 10	192.168.20.10	192.168.20.1
Mac (PC)	VLAN 20	192.168.30.10	192.168.30.1
ASR1001-X (Router)	VLAN 20	192.168.30.10	192.168.30.1