



Tel Mount Cup:


Bottom View:

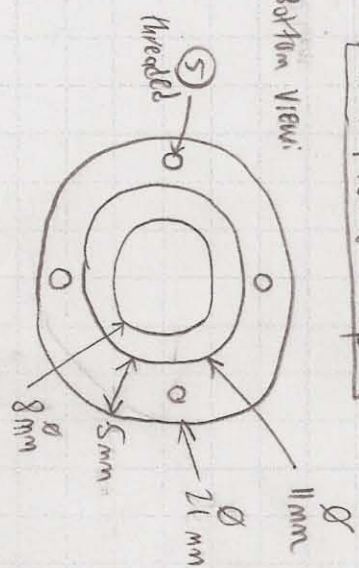


Top view

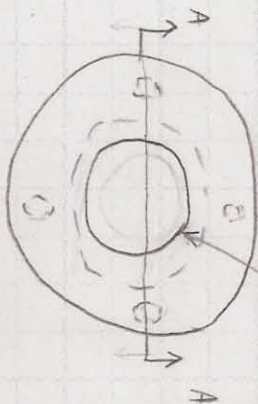


Section AA

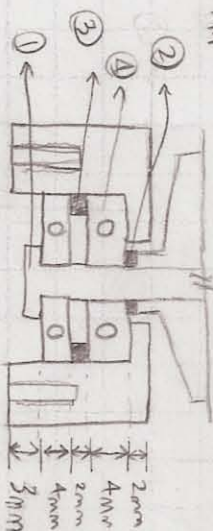


Attachment on bottom: HORIZONTAL

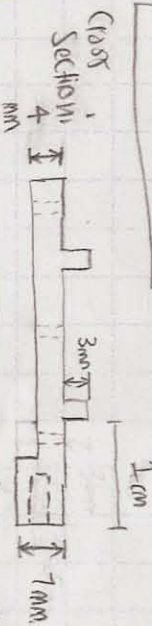



bottom view

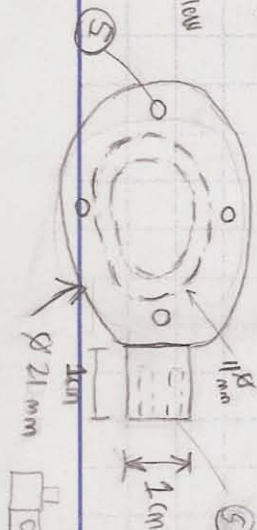

Assembly:

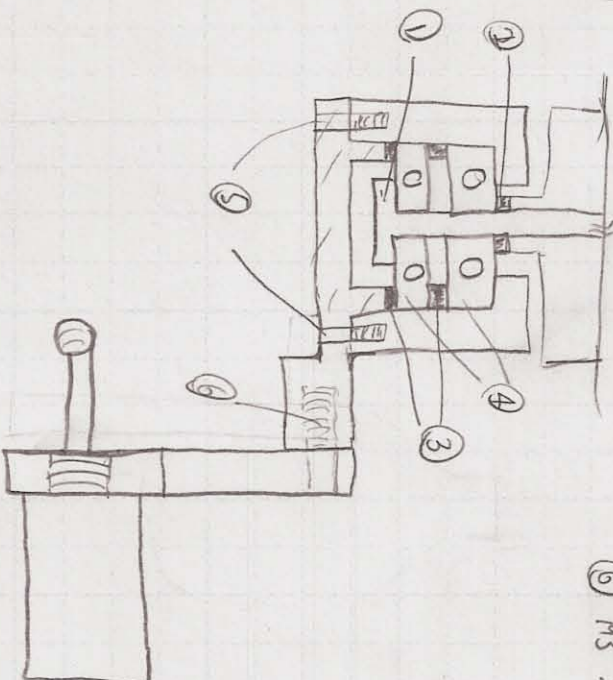

Attachment on bottom: FERTILE

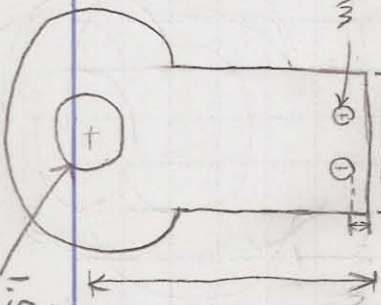

* This depends on

90 to 100

I don't know that partners

- ① M4: 90270A655
② Lock spring: 9111A118
③ Spacer: 93849A103 (9862)
④ SKF: 619/4 (need 2)
⑤ M12: 4 of 93395A147
⑥ M3: 2 of 92125A130
} M¹⁶ rough

the
proof