

CallVoip Telefontie – configuratie HP SmartPhone met SIP

HP heeft diverse SmartPhones met WiFi en SIP-client. De SIP-client kan vaak niet via het toestel worden geconfigureerd, maar middels een losse software-applicatie op uw PC. Daarmee kunt u op een vrij Wireless Access Point uw CallVoip account registreren en via VoIP bellen en gebeld worden. Dat kan erg handig zijn. Hieronder de settings voor de HP SmartPhone.

Ga naar de HP-site en zoek de downloadpagina van uw HP Ipaq product.

Bv. iPAQ 514 Voice Messenger:


<http://h10010.www1.hp.com/wwpc/nl/nl/sm/WF08a/22797-22801-22801-298363-80070280.html>

en

<http://h20000.www2.hp.com/bizsupport/TechSupport/Home.jsp?lang=nl&cc=nl&prodTypeId=215348&prodSeriesId=3375716&lang=nl&cc=nl>

Bij de downloads vindt u de HP iPAQ Setup Assistant. Bij de meeste producten wordt deze ook op CD meegeleverd.

Download en installeer de Setup Assistant; sluit uw iPAQ aan via een kabel / cradle en start de assistant. U ziet het volgende scherm:

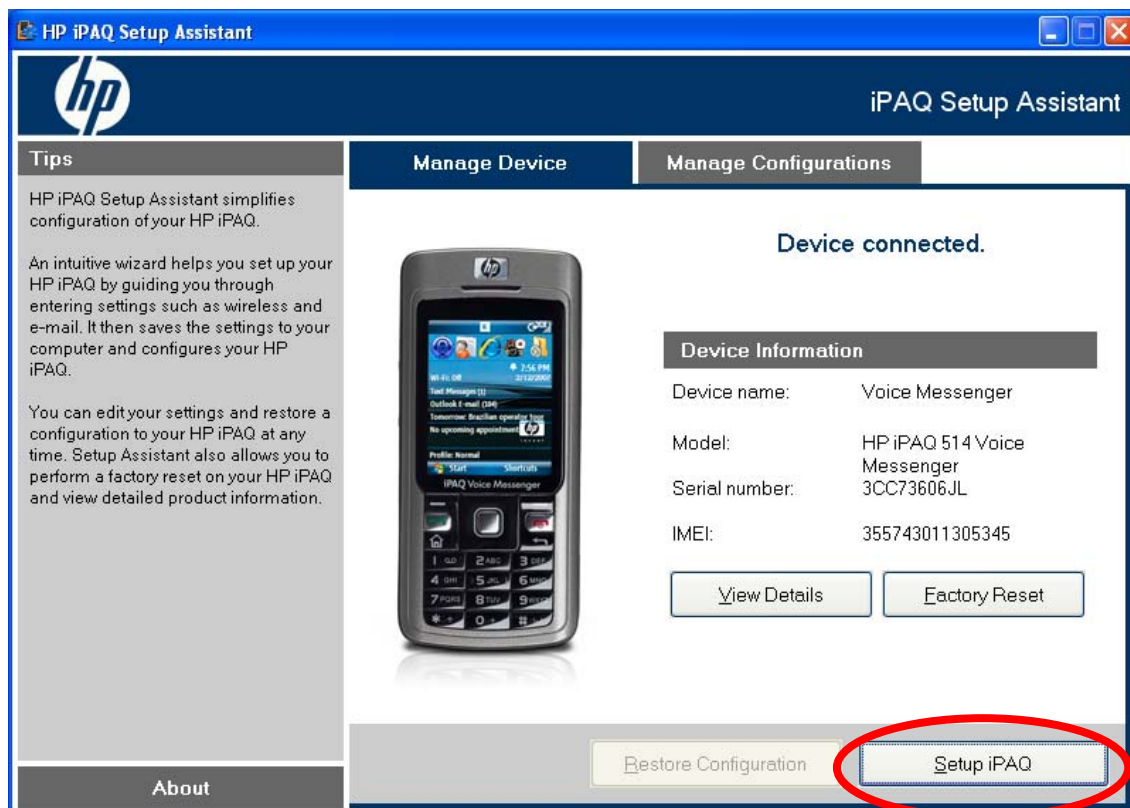

Kies vervolgens: [**Setup iPAQ**]

In het menu aan de linkerkant kiest u vervolgens item **[VoIP]**:

The screenshot shows the 'HP iPAQ Setup Assistant' window with the 'Configuration' tab selected. On the left, a 'Category' list includes 'Owner Information', 'Wireless Network', 'Proxy', 'E-mail', 'Exchange Server', 'VoIP' (highlighted with a red circle and a checkmark), 'Speed Dial', 'Browser Favorite', and 'Finish'. The main area is divided into sections: 'Account' with fields for 'User name' (0201234567), 'Password' (masked), 'Domain' (sipnl.net), and 'Service provider' (CallVoip); 'Server' with 'SIP proxy' (sip.sipnl.net) and a checked 'Register with SIP proxy' checkbox; and 'Voice Mail' with a 'Number' field (1233). Buttons for 'Options', 'Clear', 'Back', 'Next', and 'Cancel' are at the bottom. A text box on the right explains VoIP functionality and provides instructions for setting up proxy servers and voicemail.

HP iPAQ Setup Assistant

Configuration

Category

- Owner Information
- Wireless Network
- Proxy
- E-mail
- Exchange Server
- ✓ **VoIP**
- Speed Dial
- Browser Favorite
- Finish

Account

User name: 0201234567

Password: •••••

Domain: sipnl.net

Service provider: CallVoip

Server

SIP proxy: sip.sipnl.net

☒ Register with SIP proxy

SIP registrar: sip.sipnl.net

Voice Mail

Number: 1233

Options Clear

≤ Back Next ≥ Cancel

VoIP allows you to transmit voice conversations over an IP-based network. Turn on Internet Calling and Wi-Fi on your HP iPAQ before you begin configuring the VoIP settings.

Enter the login credentials, domain name, and service provider for your VoIP/SIP account. You can upload your current location to be used by proxy servers by selecting the Register with SIP proxy check box. Enter the voicemail number you want to redirect your calls to.

If you are not sure of these settings, refer to the documentation that came with your HP iPAQ or contact your network administrator or service provider.

Krijgt u uw CallVoip-account niet geregistreerd, dan kunt u proberen om niet [sip.sipnl.net] te gebruiken maar één van de IP-nummers van de servers die hierbij behoort. Geef een PING-commando op de DOS-prompt om het IP-adres te achterhalen.

The screenshot shows the 'HP iPAQ Setup Assistant' window with the 'Configuration' tab selected. The 'VoIP' category is highlighted in the left sidebar. The main area contains fields for 'Account' (User name: 0201234567, Password: masked, Domain: 83.98.222.5, Service provider: CallVoip), 'Server' (SIP proxy: 83.98.222.5, Register with SIP proxy: checked, SIP registrar: 83.98.222.5), and 'Voice Mail' (Number: 1233). The 'Options' button is circled in red. A 'Clear' button is also present. At the bottom are 'Back', 'Next', and 'Cancel' buttons. A text box on the right explains VoIP and provides instructions for proxy servers and login credentials.

Voor de finetuning, klik op [**Options**]. Er wordt een klein venstertje geopend waar u nog een paar zaken kunt instellen:

The screenshot shows the 'HP iPAQ Setup Assistant' window with the 'VoIP Options' dialog box open. The dialog box has a title bar with the HP logo and the text 'VoIP Options'. It contains two checked options: 'Use symmetric UDP sockets' and 'Enable early UDP packets for NAT traversal'. Below these are two input fields: 'Prefix for outgoing PSTN numbers' (empty) and 'DSCP (QoS) value for SIP, RTP and RTCP packets' (56). At the bottom are 'Default', 'OK', and 'Cancel' buttons.

Deze handleiding werd samengesteld op basis van input van diverse van onze klanten, waarvoor onze hartelijke dank!

Deze tips worden u aangeboden door:



CallVoip Telefonie | Kennis van VoIP
Koldingweg 19-1
9723 HL GRONINGEN

T 050-526 49 33
F 050-526 49 63

callvoip@callvoip.nl
www.callvoiptelefonie.nl