Chapter 8: IP Addressing

Introduction to Networks

Cisco | Networking Academy®
Mind Wide Open™

Binary Notation

- Binary notation refers to the fact that computers communicate in 1s and 0s
- Positional notation - converting binary to decimal requires an understanding of the mathematical basis of a numbering system

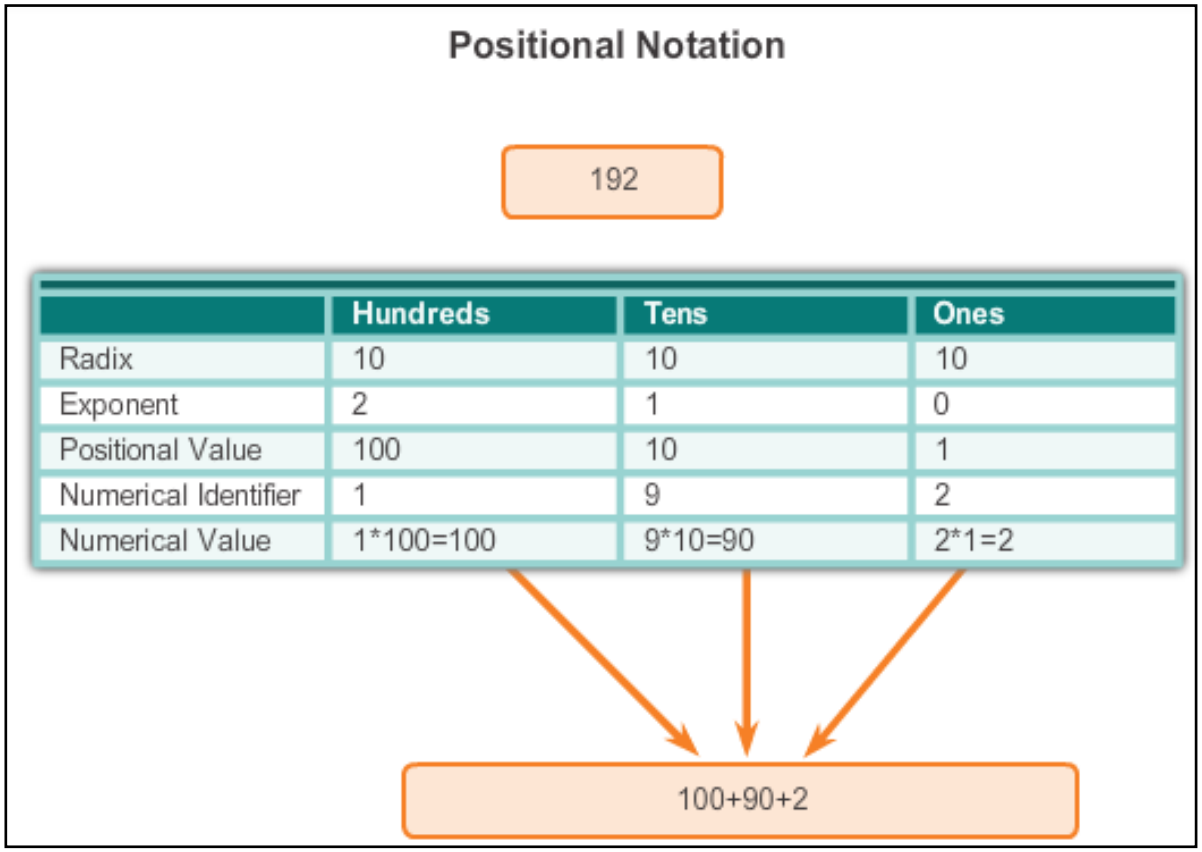

Binary Number System

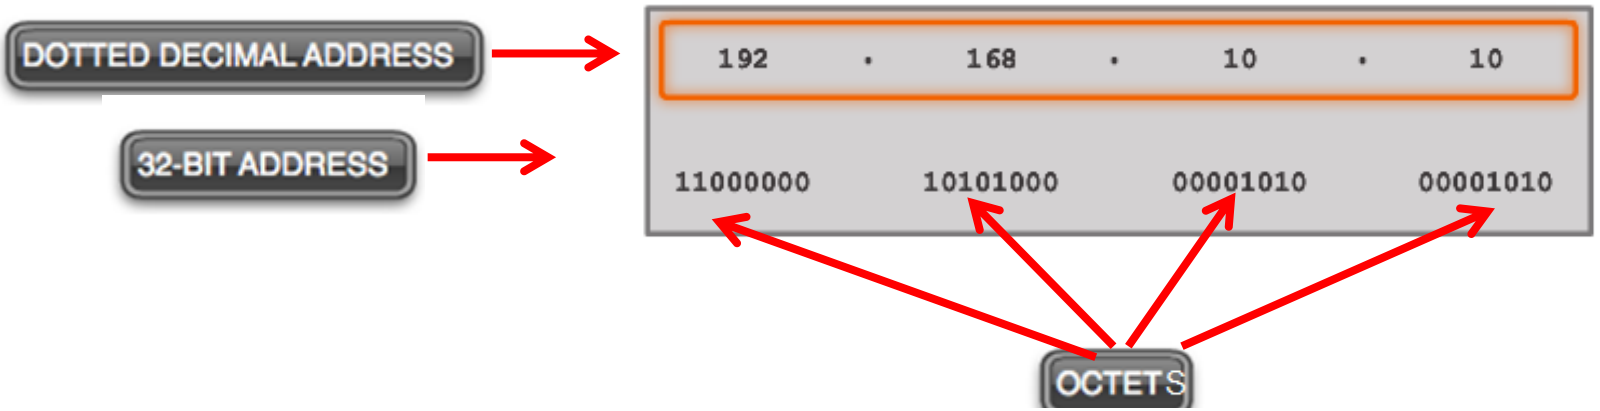

Radix	2	2	2	2	2	2	2	2
Exponent	7	6	5	4	3	2	1	0
Octet Bit Values	128	64	32	16	8	4	2	1
Binary Address	1	1	0	0	0	0	0	0
Binary Bit Values	128	64	0	0	0	0	0	0

Add the binary bit values. 128 + 64 = 192

Converting a Binary Address to Decimal

Practice

2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
128	64	32	16	8	4	2	1
1	0	1	1	0	0	0	0

2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
128	64	32	16	8	4	2	1
1	1	1	1	1	1	1	1

Converting a Binary Address to Decimal

Practice

2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
128	64	32	16	8	4	2	1
1	0	1	1	0	0	0	0

Answer = 176

2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
128	64	32	16	8	4	2	1
1	1	1	1	1	1	1	1

Answer = 255

Converting a Binary Address to Decimal

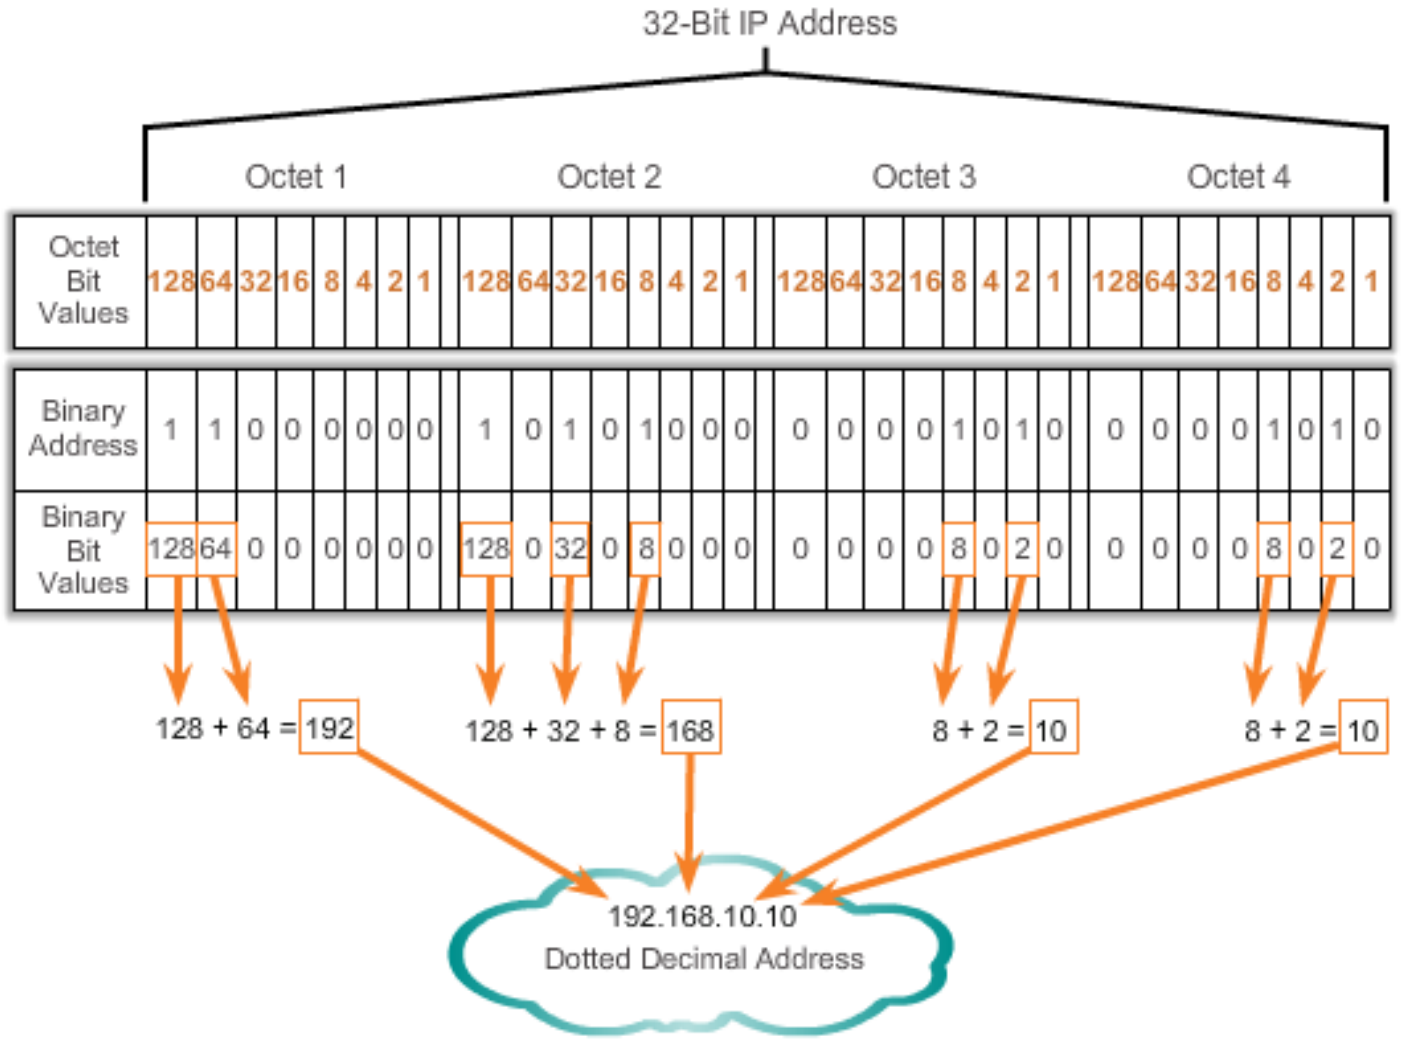

Converting from Decimal to Binary (Cont.)

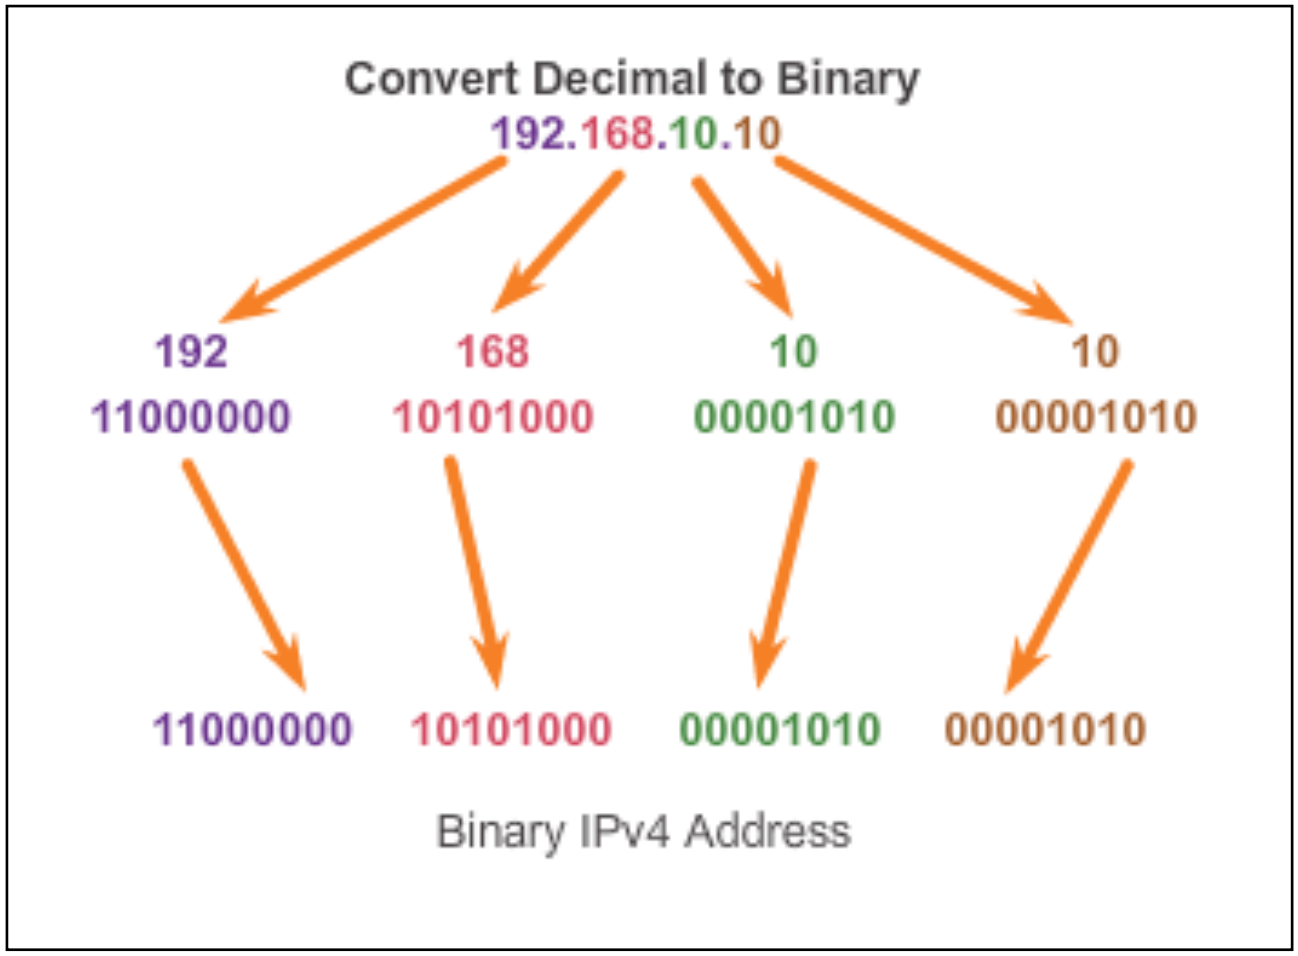

Network Portion and Host Portion of an IPv4 Address

- To define the network and host portions of an address, a devices use a separate 32-bit pattern called a subnet mask
- The subnet mask does not actually contain the network or host portion of an IPv4 address, it just says where to look for these portions in a given IPv4 address

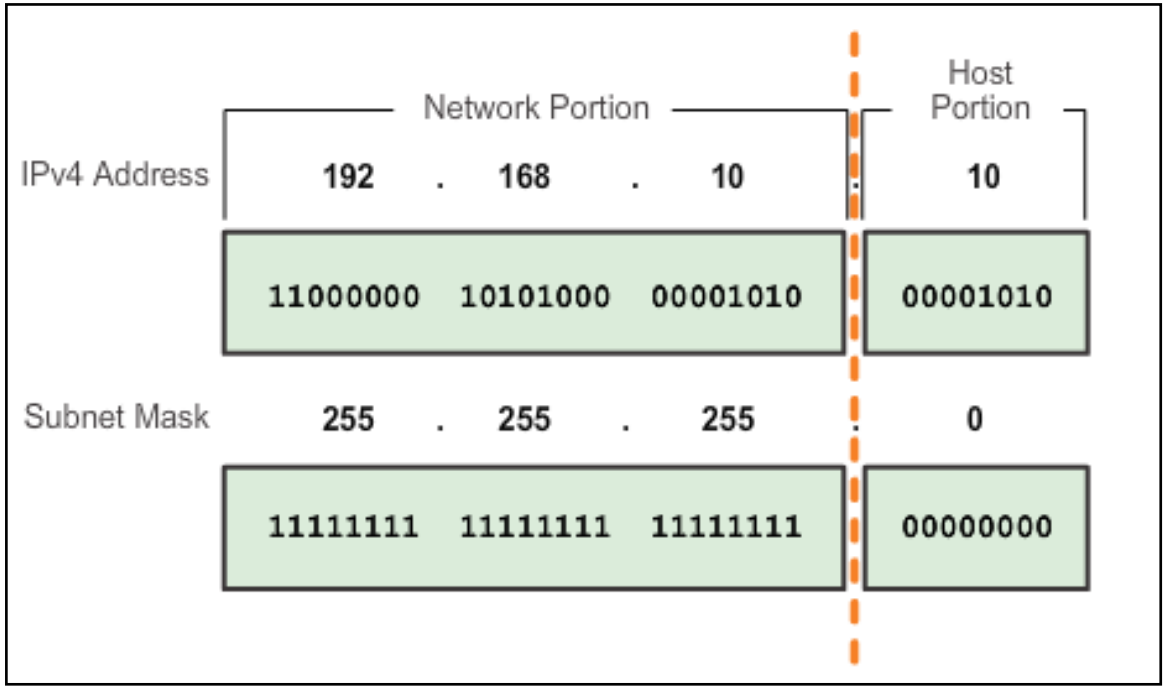

Network Portion and Host Portion of an IPv4 Address (cont.)

Valid Subnet Masks

Subnet Value	Bit Value							
	128	64	32	16	8	4	2	1
255	1	1	1	1	1	1	1	1
254	1	1	1	1	1	1	1	0
252	1	1	1	1	1	1	0	0
248	1	1	1	1	1	0	0	0
240	1	1	1	1	0	0	0	0
224	1	1	1	0	0	0	0	0
192	1	1	0	0	0	0	0	0
128	1	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0

IPv4 Subnet Mask

Examining the Prefix Length

	Dotted Decimal	Significant bits shown in binary
Network Address	**10.1.1.0/24**	**10.1.1.00000000**
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.254	10.1.1.11111110
Broadcast Address	10.1.1.255	10.1.1.11111111
Number of hosts: 2^8 – 2 = 254 hosts		

Network Address	**10.1.1.0/25**	**10.1.1.00000000**
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.126	10.1.1.01111110
Broadcast Address	10.1.1.127	10.1.1.01111111
Number of hosts: 2^7 – 2 = 126 hosts		

Network Address	**10.1.1.0/26**	**10.1.1.00000000**
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.62	10.1.1.00111110
Broadcast Address	10.1.1.63	10.1.1.00111111
Number of hosts: 2^6 – 2 = 62 hosts		

Examining the Prefix Length (cont.)

	Dotted Decimal	Significant bits shown in binary
Network Address	**10.1.1.0/27**	**10.1.1.00000000**
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.30	10.1.1.00011110
Broadcast Address	10.1.1.31	10.1.1.00011111
Number of hosts: 2^5 – 2 = 30 hosts		

Network Address	**10.1.1.0/28**	**10.1.1.00000000**
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.14	10.1.1.00001110
Broadcast Address	10.1.1.15	10.1.1.00001111
Number of hosts: 2^4 – 2 = 14 hosts		

IPv4 Network, Host, and Broadcast Address

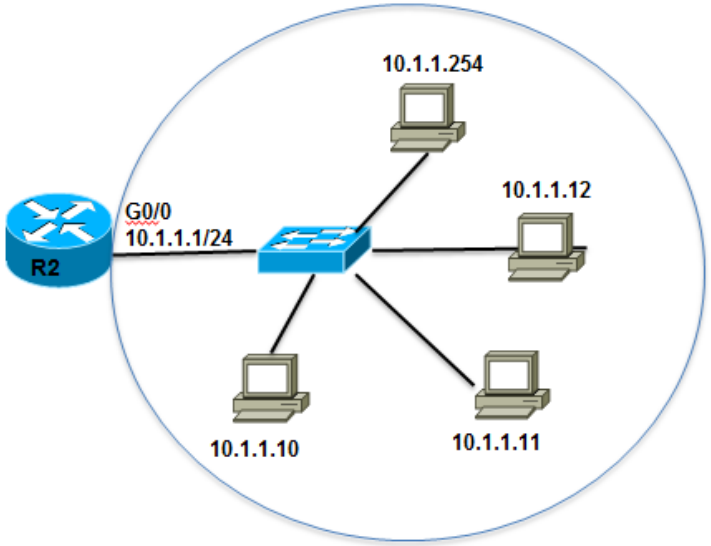

10.1.1.0/24

Network Portion			Host Portion	
10	1	1	0	
00001010	00000001	00000001	00000000	All 0s – NETWORK ADDRESS
10	1	1	10	
00001010	00000001	00000001	00001010	0s and 1s in host portion
10	1	1	255	
00001010	00000001	00000001	11111111	All 1s – BROADCAST ADDRESS

First Host and Last Host Addresses

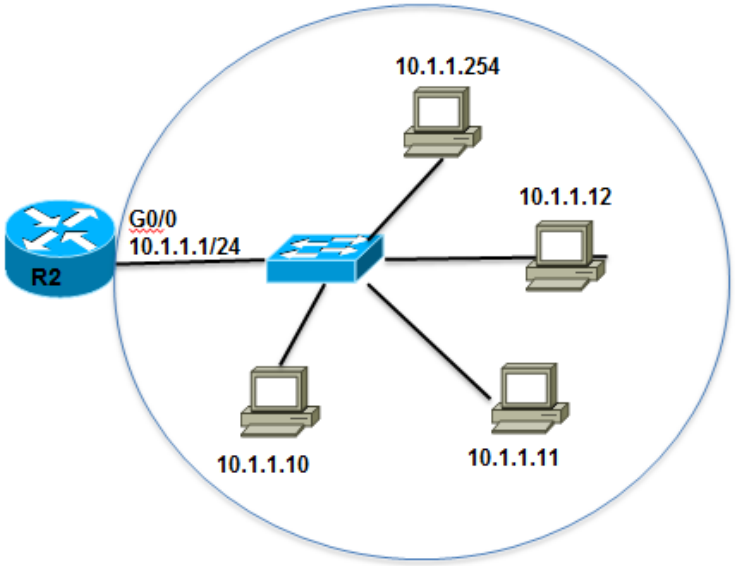

10.1.1.0/24

Network Portion			Host Portion	
10	1	1	1	FIRST HOST
00001010	00000001	00000001	00000001	All 0s and a 1 in the host portion
10	1	1	254	LAST HOST
00001010	00000001	00000001	11111110	All 1s and a 0 in the host portion

Bitwise AND Operation

1 AND 1 = 1 1 AND 0 = 0 0 AND 1 = 0 0 AND 0 = 0

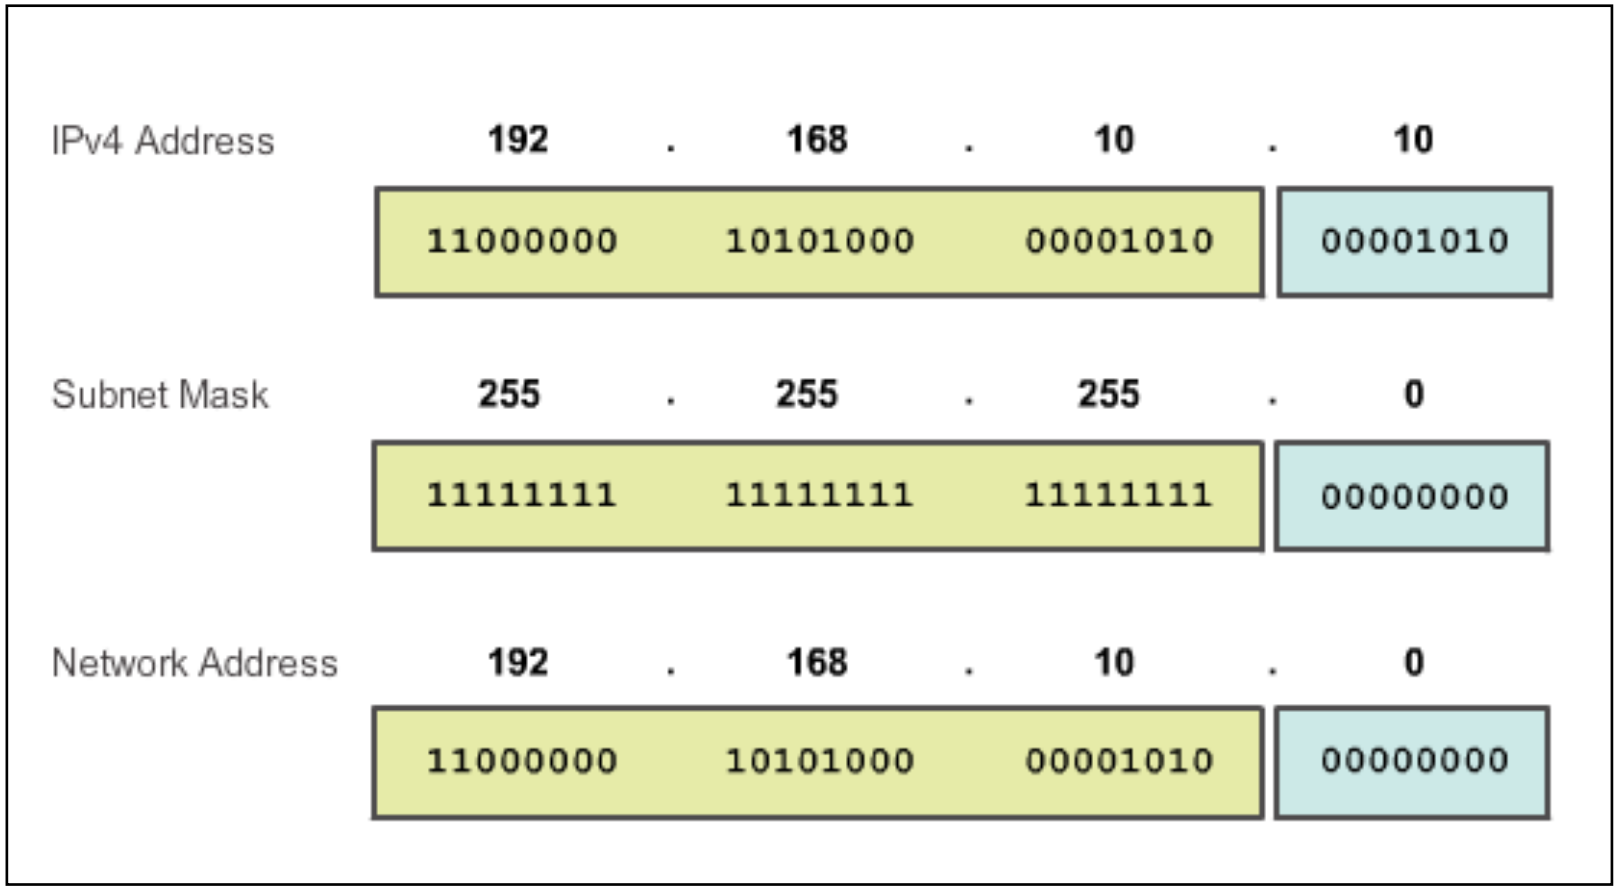

Unicast Transmission

In an IPv4 network, the hosts can communicate one of three different ways: **Unicast**, Broadcast, and Multicast

#1 Unicast – the process of sending a packet from one host to an individual host.

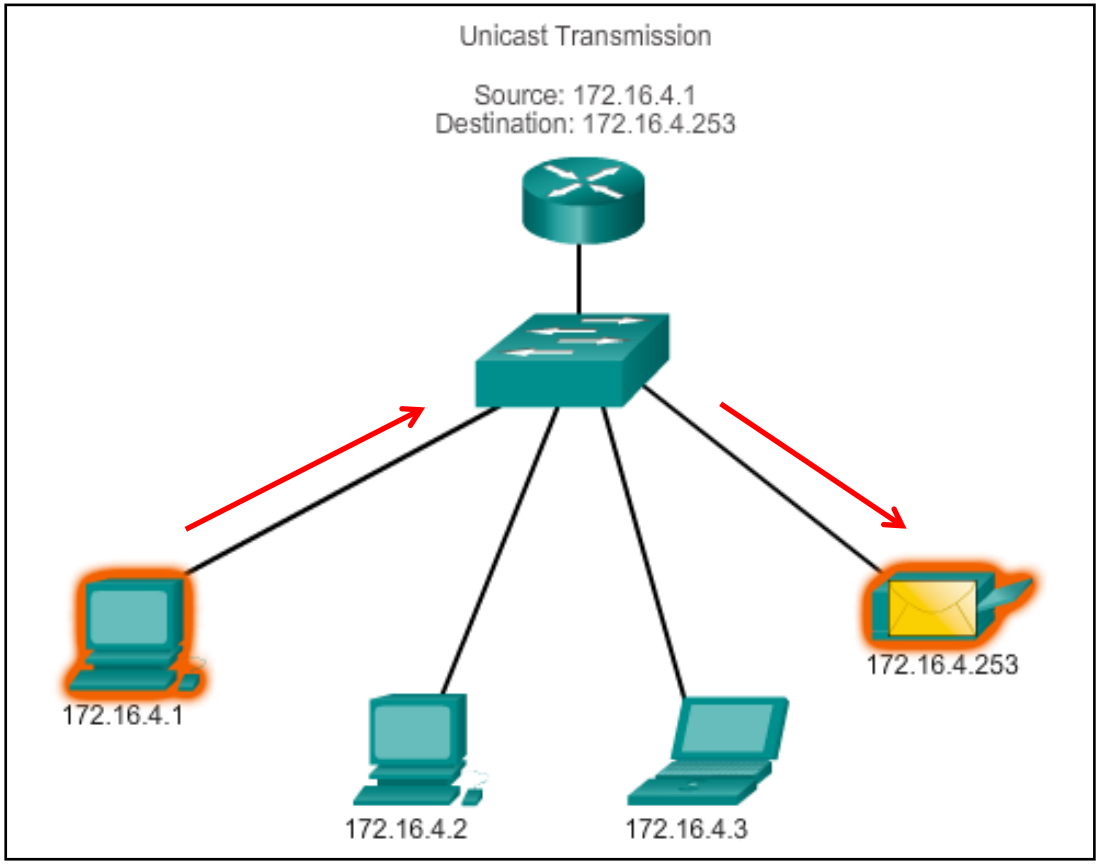

Broadcast Transmission

In an IPv4 network, the hosts can communicate one of three different ways: Unicast, **Broadcast**, and Multicast.

#2 Broadcast – the process of sending a packet from one host to all hosts in the network.

NOTE: Routers do not forward a limited broadcast!

Directed broadcast

- Destination 172.16.4.255
- Hosts within the 172.16.4.0/24 network

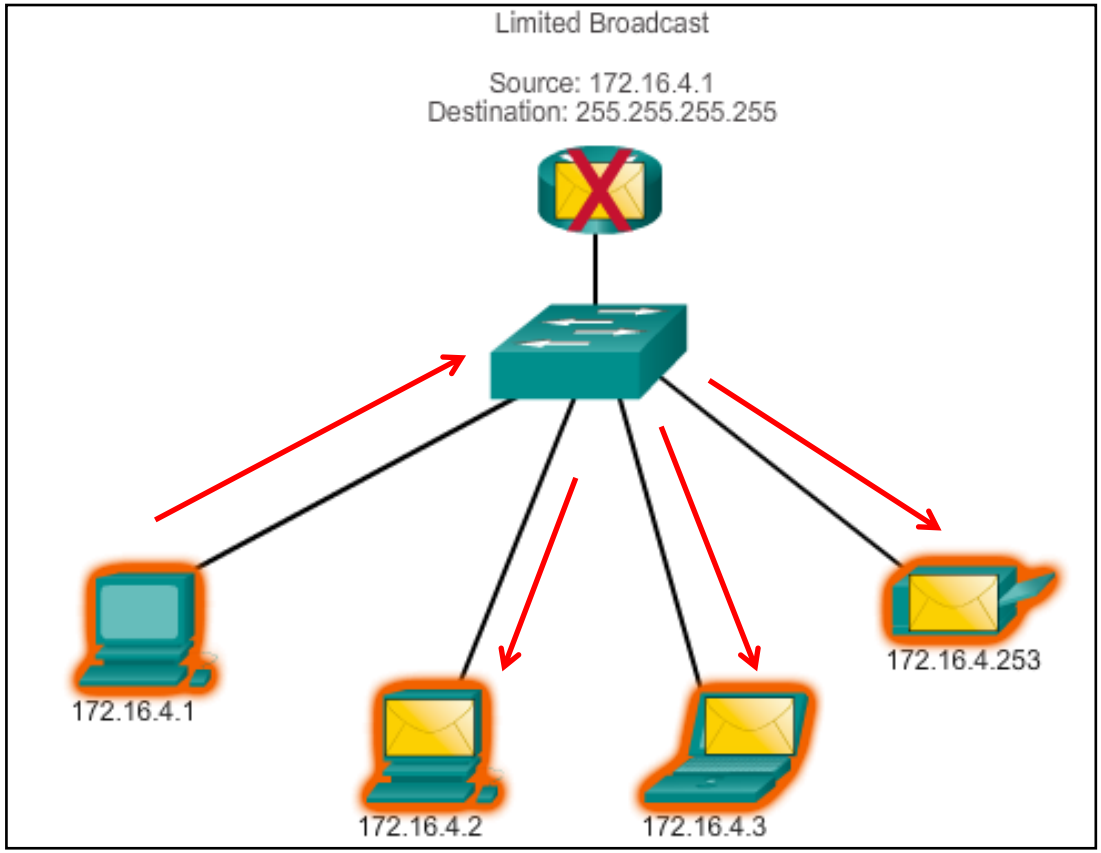

Multicast Transmission

In an IPv4 network, the hosts can communicate one of three different ways: Unicast, Broadcast, and **Multicast.**

#3 Multicast – The process of sending a packet from one host to a selected group of hosts, possibly in different networks.

- Reduces traffic
- Reserved for addressing multicast groups – 224.0.0.0 to 239.255.255.255.
- Link local – 224.0.0.0 to 224.0.0.255 (Example: routing information exchanged by routing protocols)
- Globally scoped addresses – 224.0.1.0 to 238.255.255.255 (Example: 224.0.1.1 has been reserved for Network Time Protocol)

Public and Private IPv4 Addresses

Private address blocks are:

- Hosts that do not require access to the Internet can use private addresses
  - 10.0.0.0 to 10.255.255.255 (10.0.0.0/8)
  - 172.16.0.0 to 172.31.255.255 (172.16.0.0/12)
  - 192.168.0.0 to 192.168.255.255 (192.168.0.0/16)

Shared address space addresses:

- Not globally routable
- Intended only for use in service provider networks
- Address block is 100.64.0.0/10

Special Use IPv4 Addresses

- **Network and Broadcast addresses** – within each network the first and last addresses cannot be assigned to hosts
- **Loopback address** – 127.0.0.1 a special address that hosts use to direct traffic to themselves (addresses 127.0.0.0 to 127.255.255.255 are reserved)
- **Link-Local address** – 169.254.0.0 to 169.254.255.255 (169.254.0.0/16) addresses can be automatically assigned to the local host
- **TEST-NET addresses** – 192.0.2.0 to 192.0.2.255 (192.0.2.0/24) set aside for teaching and learning purposes, used in documentation and network examples
- **Experimental addresses** – 240.0.0.0 to 255.255.255.254 are listed as reserved

Types of IPv4 Address

Legacy Classful Addressing

IP Address Classes

Address Class	1st octet range (decimal)	1st octet bits (green bits do not change)	Network(N) and Host(H) parts of address	Default subnet mask (decimal and binary)	Number of possible networks and hosts per network
A	1-127**	00000000-01111111	N.H.H.H	255.0.0.0	128 nets (2^7) 16,777,214 hosts per net (2^24-2)
B	128-191	10000000-10111111	N.N.H.H	255.255.0.0	16,384 nets (2^14) 65,534 hosts per net (2^16-2)
C	192-223	11000000-11011111	N.N.N.H	255.255.255.0	2,097,150 nets (2^21) 254 hosts per net (2^8-2)
D	224-239	11100000-11101111	NA (multicast)		
E	240-255	11110000-11111111	NA (experimental)		

Legacy Classful Addressing (cont.)

Classless Addressing

- Formal name is Classless Inter-Domain Routing (CIDR, pronounced “cider
- Created a new set of standards that allowed service providers to allocate IPv4 addresses on any address bit boundary (prefix length) instead of only by a class A, B, or C address

Assignment of IP Addresses

Regional Internet Registries (RIRs)

Assignment of IP Addresses (Cont.)

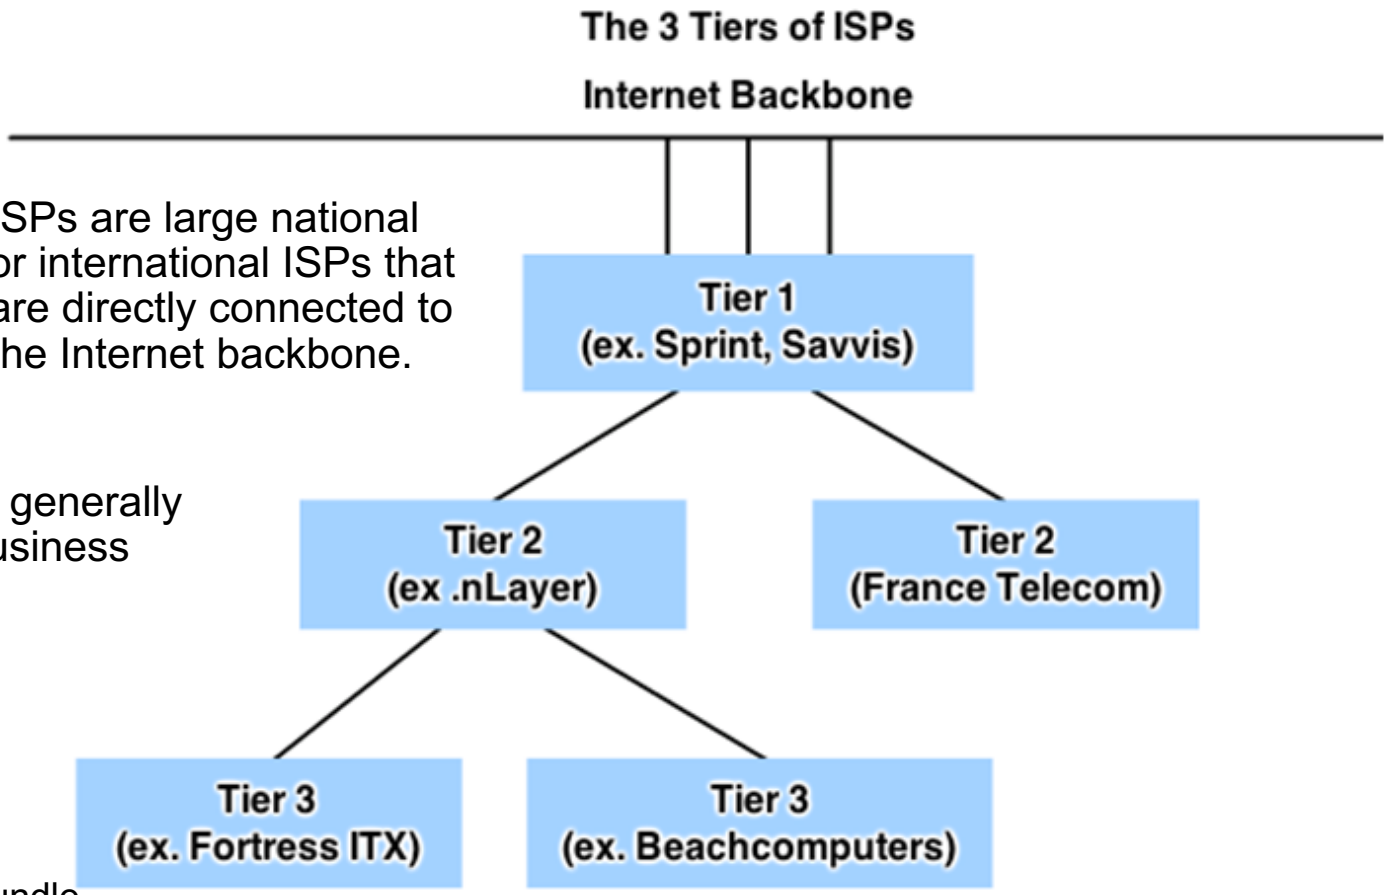

ISPs are large national or international ISPs that are directly connected to the Internet backbone.

Tier 2 ISPs generally focus on business customers.

Tier 3 ISPs often bundle Internet connectivity as a part of network and computer service contracts for their customers.

Tier 3 ISPs purchase their Internet service from Tier 2 ISPs.