REV	DESCRIPTION	DATE
A	Initial release	2026-10-16

TABULATED DIMENSIONS (READABLE)

Outer flange	D 250.00 mm
Barrel	D 180.00 mm
Pilot	D 120.00 mm
Bore	D 80.00 mm
Height	110.00 mm
Flange thick	28.00 mm
Bolt pattern PCD	D 200
Bolt holes	D 14.00 mm x 8
Keyway width	10.00 mm
Keyway depth	5.00 mm

SECTION A-A

(FRONT ELEVATION)

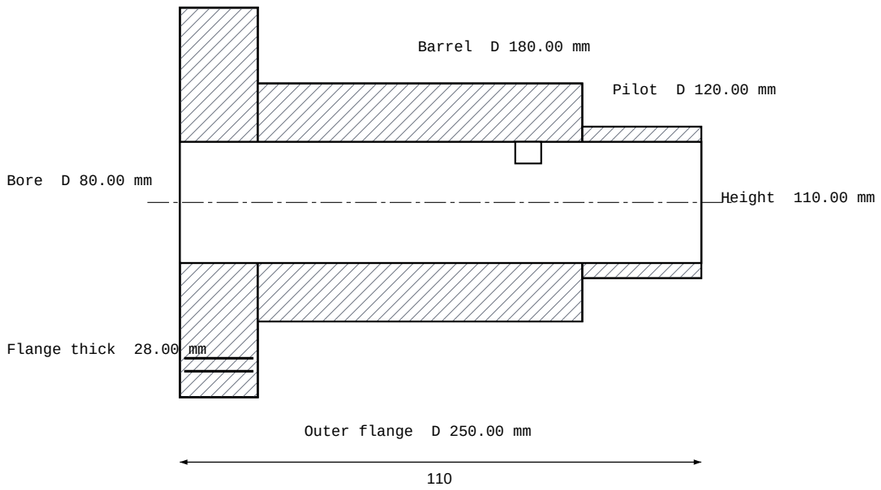

VIEW B

(FLANGE FACE)

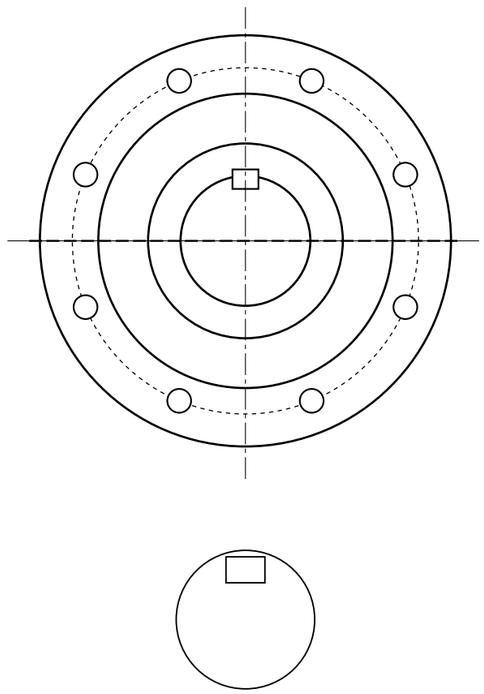

GENERAL TOLERANCE: ISO 2768-mK | SURFACE: Ra 1.6 | EDGES: ISO 13715

NOTES

1. INTERPRET DRAWING PER ISO 128 / ISO 129.
2. UNTOLERANCED DIMENSIONS PER ISO 2768-mK.
3. SURFACE TEXTURE Ra 1.6 UNLESS NOTED.
4. BREAK SHARP EDGES 0.3 x 45 DEG.
5. MAGNETIC PARTICLE INSPECT AFTER HEAT TREAT.
6. ALL DIMENSIONS IN MILLIMETRES.

1st ANGLE PROJECTION

LEGAL OWNER **VISION3D / DEMO MFG**		DRAWING NUMBER **HCEC-250-80-R**	
TITLE **HYDRAULIC CYLINDER END CAP**			
MATERIAL 42CrMo4 +QT EN 10083	SCALE **1:2**	UNITS **MM**	
TOLERANCE ISO 2768-mK / Ra 1.6	REV **A**	SHEET **1/1**	