


6x7 CHI Mesh: 2RN+2HN per Router + 4 SN/DDR Nodes

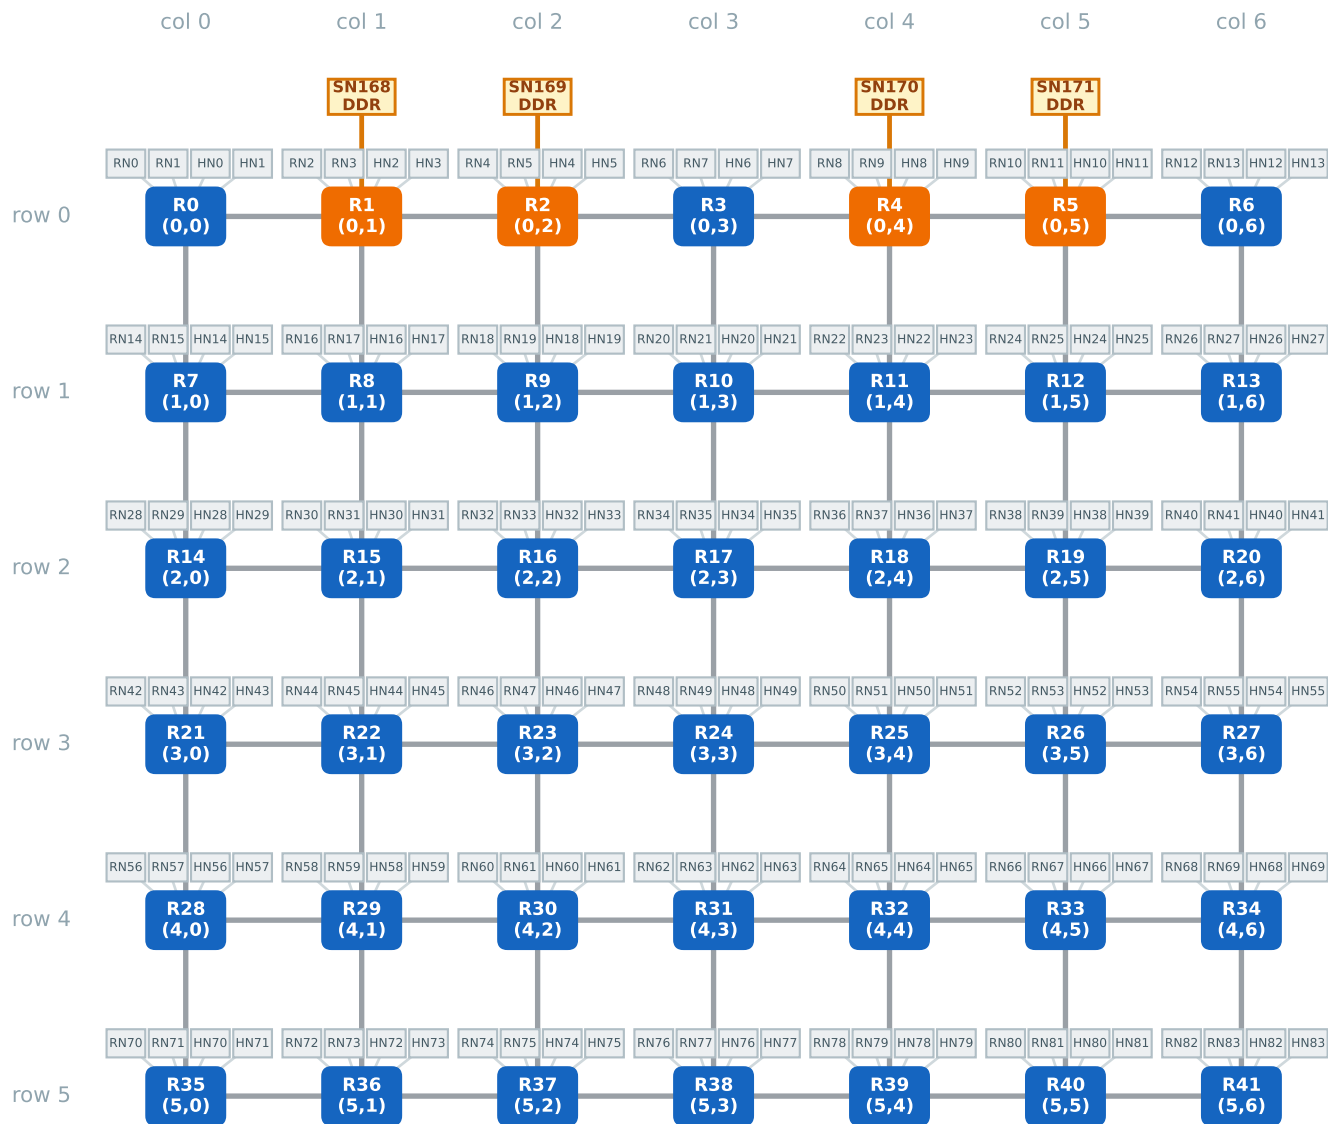

SN placement: R1(0,1)->node168, R2(0,2)->node169, R4(0,4)->node170, R5(0,5)->node171

Total terminals: 84 RN + 84 HN + 4 SN = 172 nodes. SN nodes are direct router terminals used to model DDR access.