


ZCN-LP Simulation Setup


vc_buf_size=4, DATA FLITS=2, XY, link latency=1, router delay=1 cycle

Topology: 7×6 CHI mesh — 84 RN + 84 HN + 4 SN (DDR)



SN @ R18/R24/R23/R29 (nodes 168-171), XY routing, link_latency=1, router_delay=1 cycle

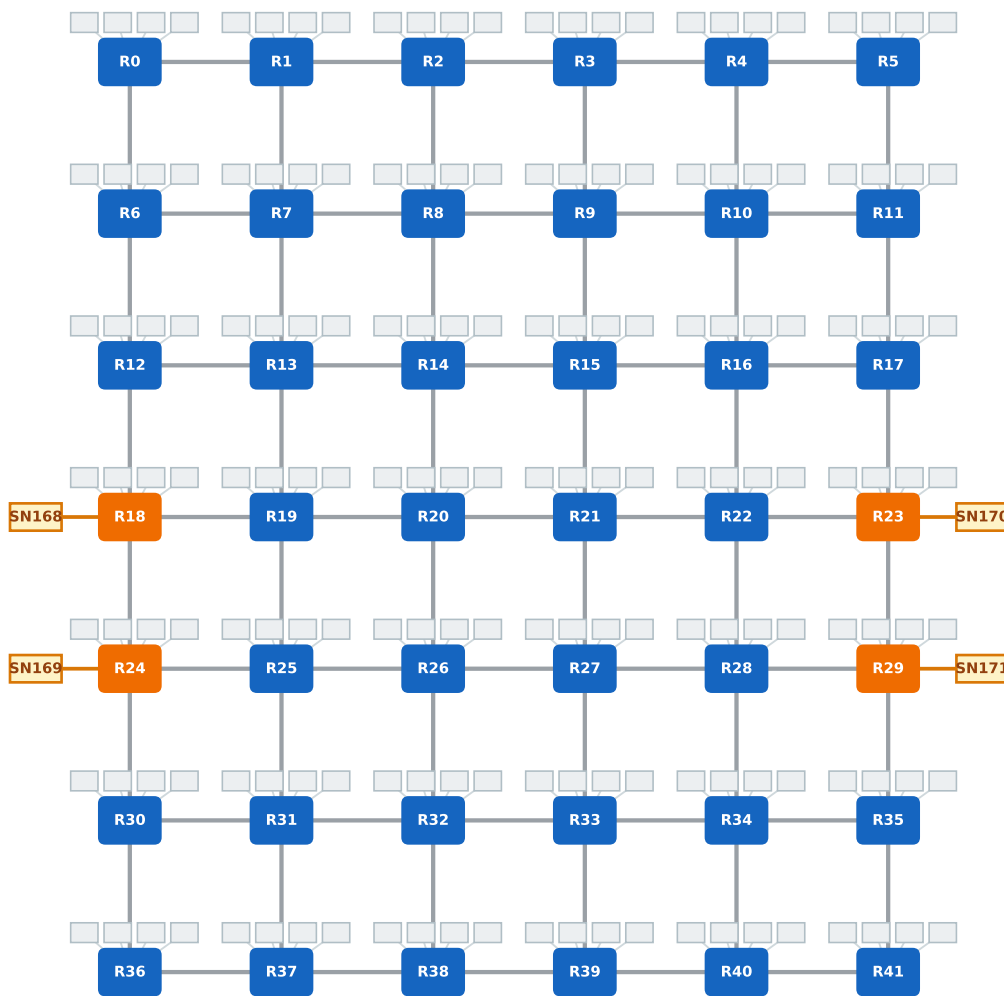

Latency vs offered load (read/write ceiling mixes)

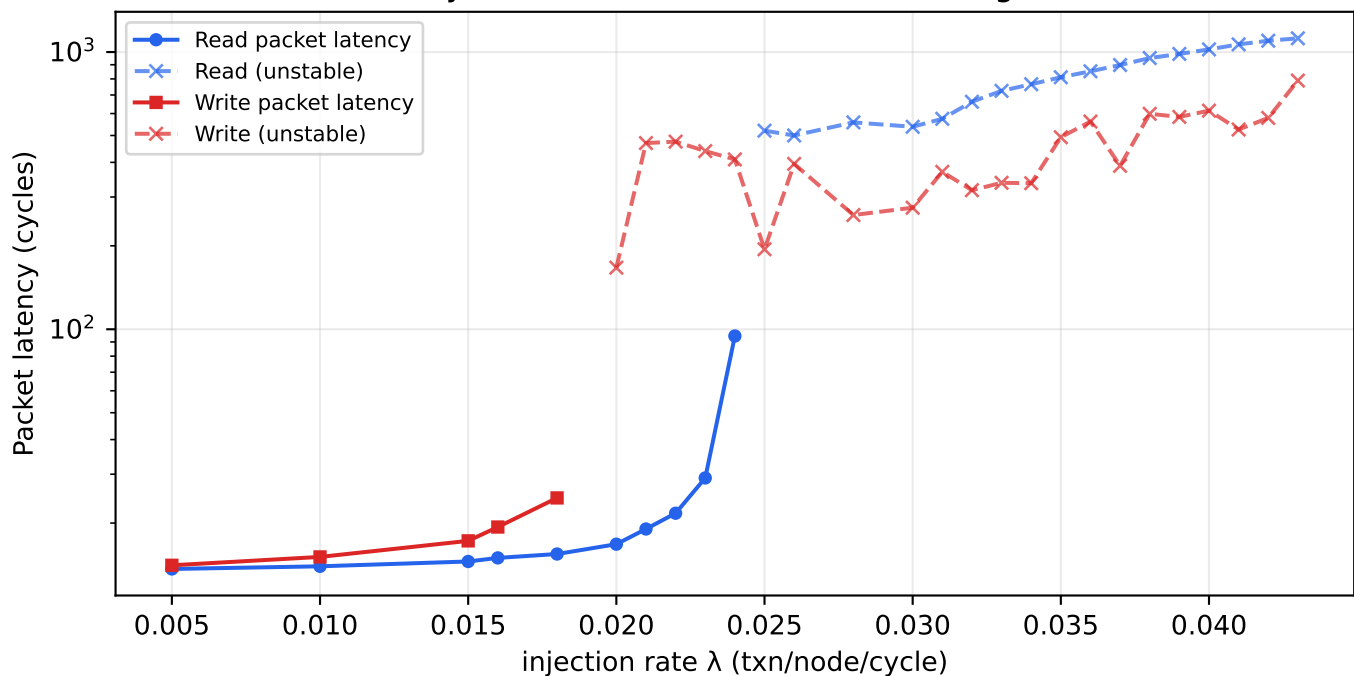

Solid markers = converged (ok). Dashed $\times$ = UNSTBL / last DisplayStats snapshot.
 Packet latency (atime-ctime, incl. source queueing) from sweep_sn_throughput ceiling CSVs.

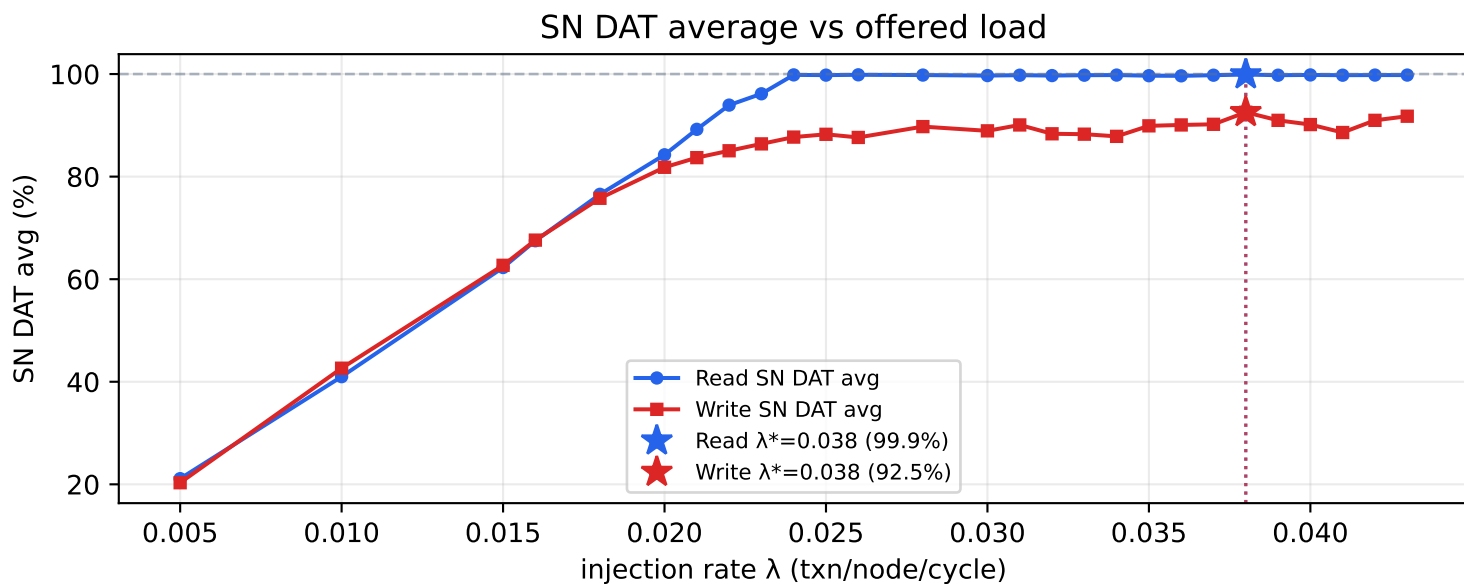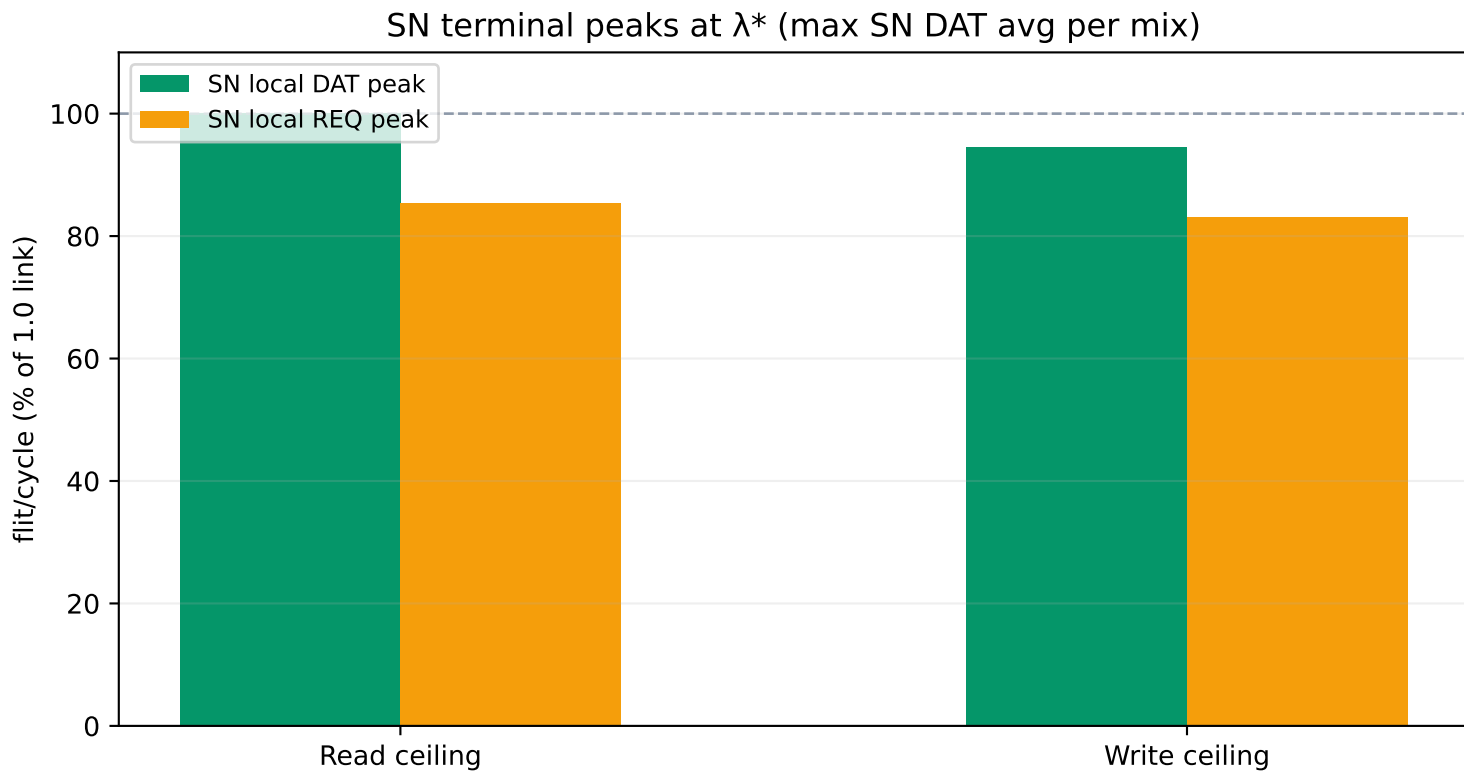

Path	λ^* (max avg)	SN DAT peak	SN DAT avg	SN REQ peak	SN REQ avg	State
Read	0.038	100.0%	99.9%	85.3%	81.0%	UNSTBL
Write	0.038	94.5%	92.5%	83.0%	79.1%	UNSTBL