
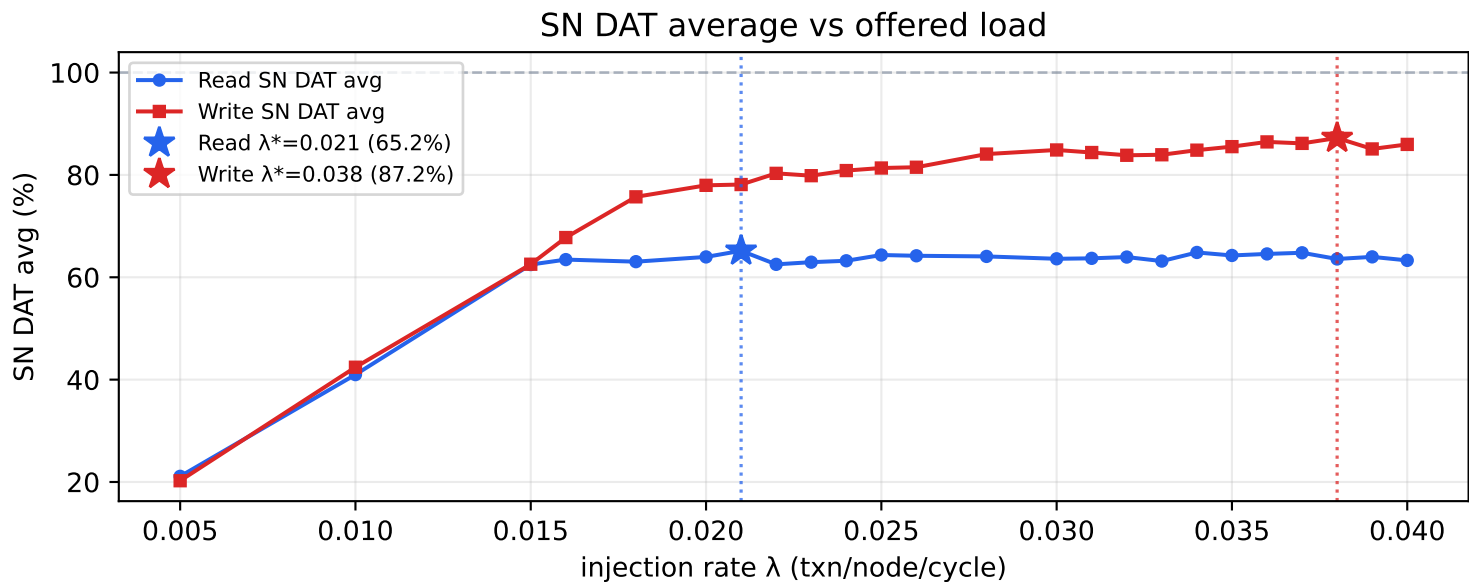


ZCN SN Read/Write Utilisation

vc_buf_size=4 flits/VC, DATA_FLITS=2, XY routing, link_latency=2

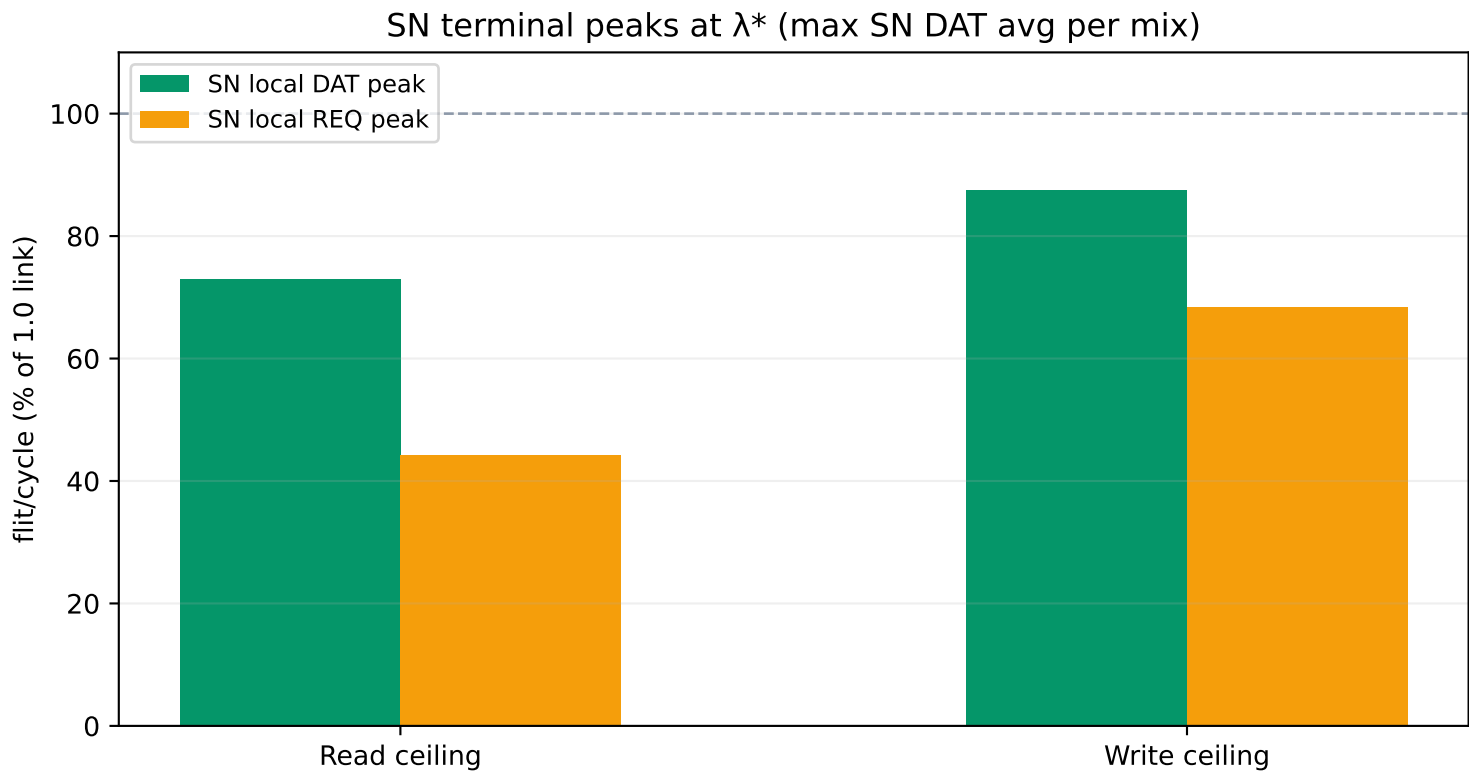

Path	λ^* (max avg)	SN DAT peak	SN DAT avg	SN REQ peak	SN REQ avg	State
Read	0.021	73.0%	65.2%	44.2%	42.9%	UNSTBL
Write	0.038	87.5%	87.2%	68.3%	67.8%	UNSTBL

Config: 6×7 mesh CHI, 4 SN nodes (168–171), vc_buf=4 flits/VC, 2 VCs, DATA_FLITS=2 (32B/packet on wire).
 Read ceiling: 100% ReadShared DMT miss → CompData SN→RN. Write ceiling: 100% WriteBack + L3EvictToSN.
 SN local DAT read = max sent_flits@SN (inject); write = max accepted_flits@SN (eject). SN local REQ = max accepted_flits@SN on REQ channel to SN.
 Write/read SN DAT avg ratio at λ^* : 1.34× (87% vs 65%).