
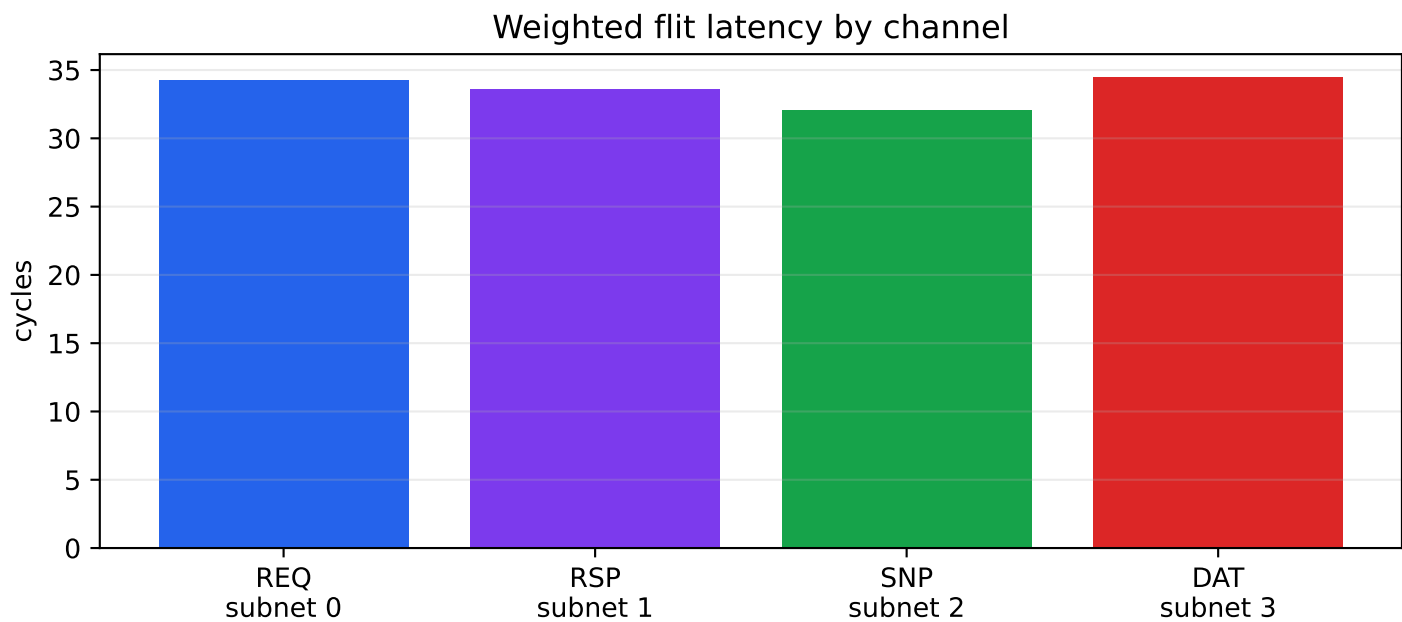


CHI 4-Channel / 4-Subnet Network Analysis

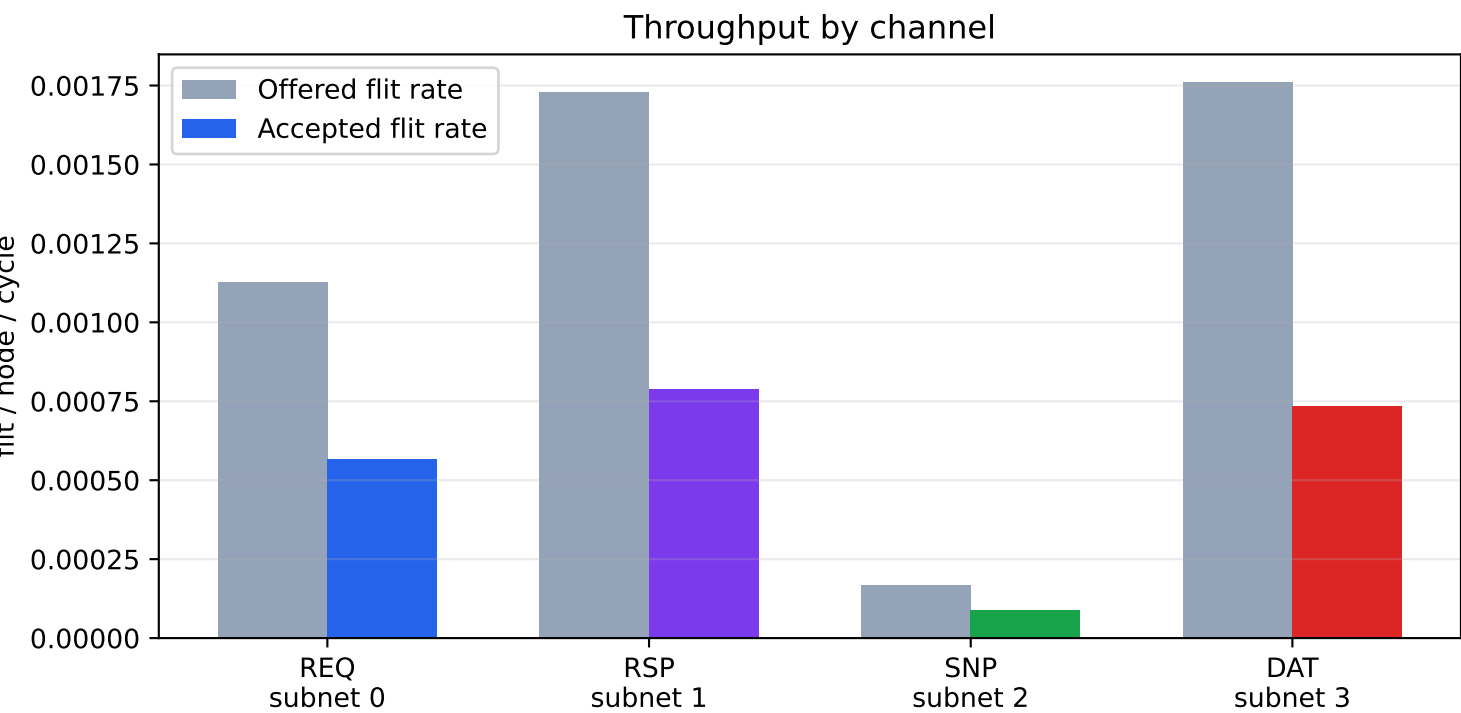

- Highest accepted flit throughput is on RSP (subnet 1).
- Highest weighted flit latency is on DAT (subnet 3).
- Keep REQ/RSP/SNP/DAT physically separated; the report shows whether a single channel, rather than protocol or
- Config: 4 subnets (REQ/RSP/SNP/DAT), 2 VCs/input, 2-flit VC buffers, output-first round-robin switch arbitration
- For the current low-load point, all channels have accepted/injected flit ratio near 1, so this is a baseline latency
- RSP currently carries comparable or higher packet pressure than DAT; avoid undersizing RSP buffers/allocators
- With 2 VC and 2-flit buffers, run a load sweep before final sizing; shallow buffers can sharply reduce the knee p

Per-Subnet Summary

Channel	Subnet	Classes	Active	Offered	Accepted	Acc/Inj	Pkt Lat	Flit Lat	Hops
REQ	0	34	32	0.00113	0.00056	1.001	34.31	34.27	6.44
RSP	1	60	56	0.00173	0.00079	1.000	33.60	33.60	6.28
SNP	2	14	12	0.00017	0.00009	1.010	32.00	32.01	5.99
DAT	3	21	19	0.00176	0.00073	1.008	35.37	34.44	6.35

Interpretation:
Accepted flit rate is the channel throughput reported by BookSim after aggregating all classes mapped to the
Packet/flit latencies are weighted by accepted packet/flit rates, so inactive classes do not skew the channel a
Acceptance ratio close to 1 indicates the run drained at the selected injection point; saturation analysis still r