



ZCN Simulation Setup

vc buf size=4, DATA FLITS=2, XY, link latency=2
Topology: 6x7 CHI mesh — 84 RN + 84 HN + 4 SN (DDR)
SN @ R1/R2/R4/R5 (nodes 168-171), XY routing, link_latency=2

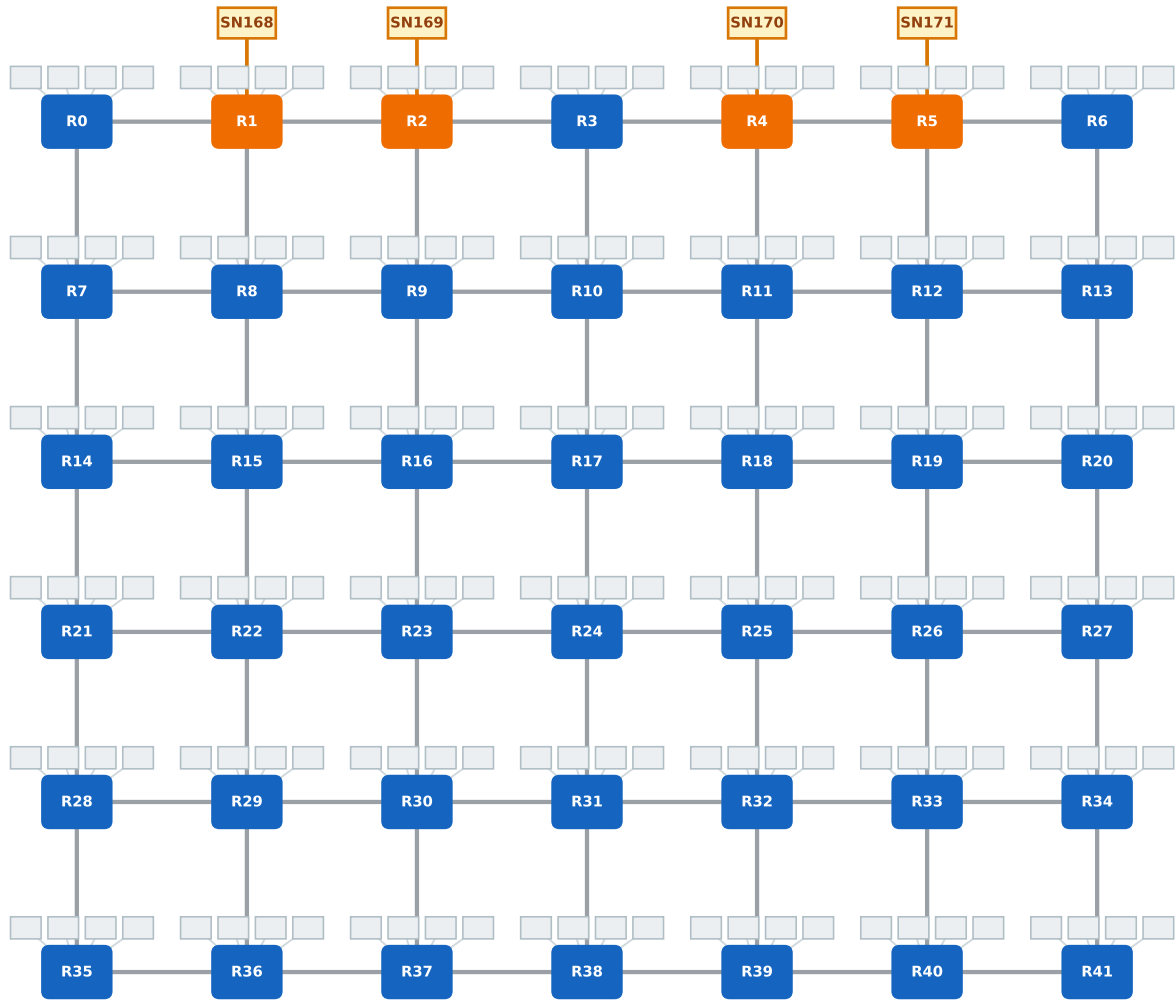



Latency vs offered load (read/write ceiling mixes)

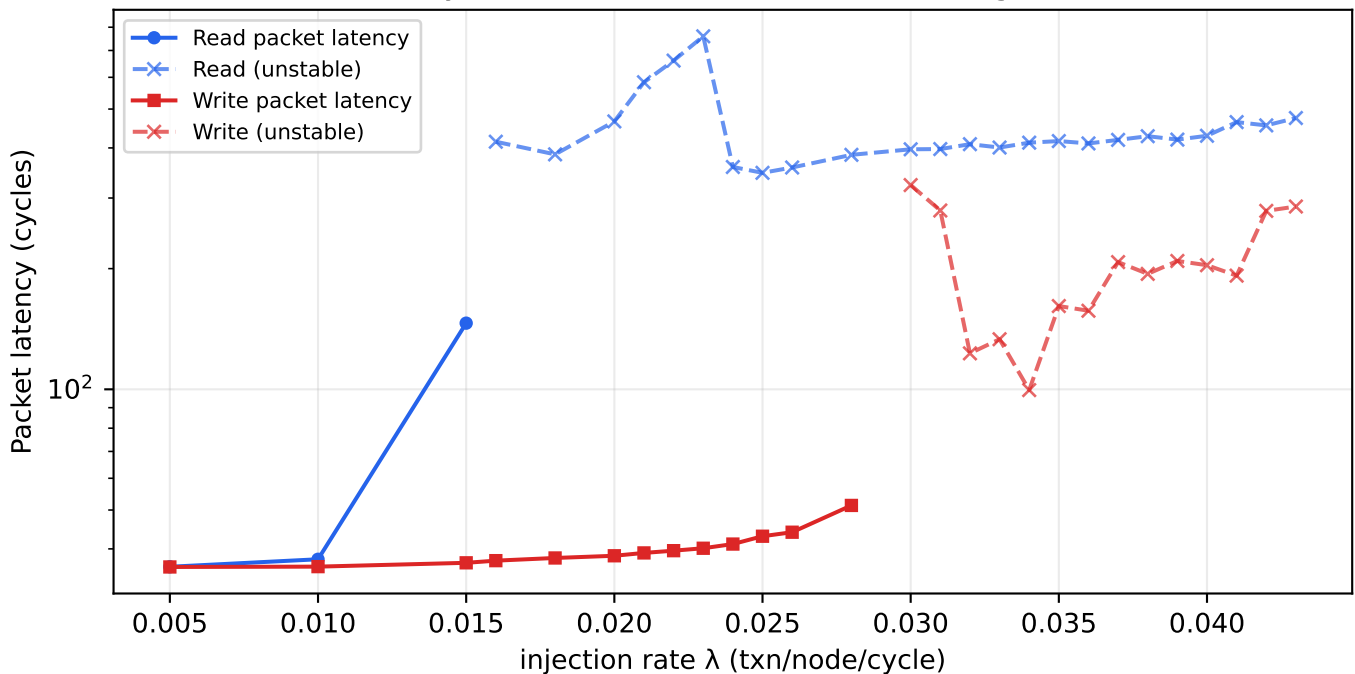

Solid markers = converged (ok). Dashed x = UNSTBL / last DisplayStats snapshot.
 Packet latency (atime-ctime, incl. source queueing) from sweep_sn_throughput ceiling CSVs.

ZCN SN Read/Write Utilisation

vc_buf_size=4 flits/VC, DATA_FLITS=2, XY routing, link_latency=2

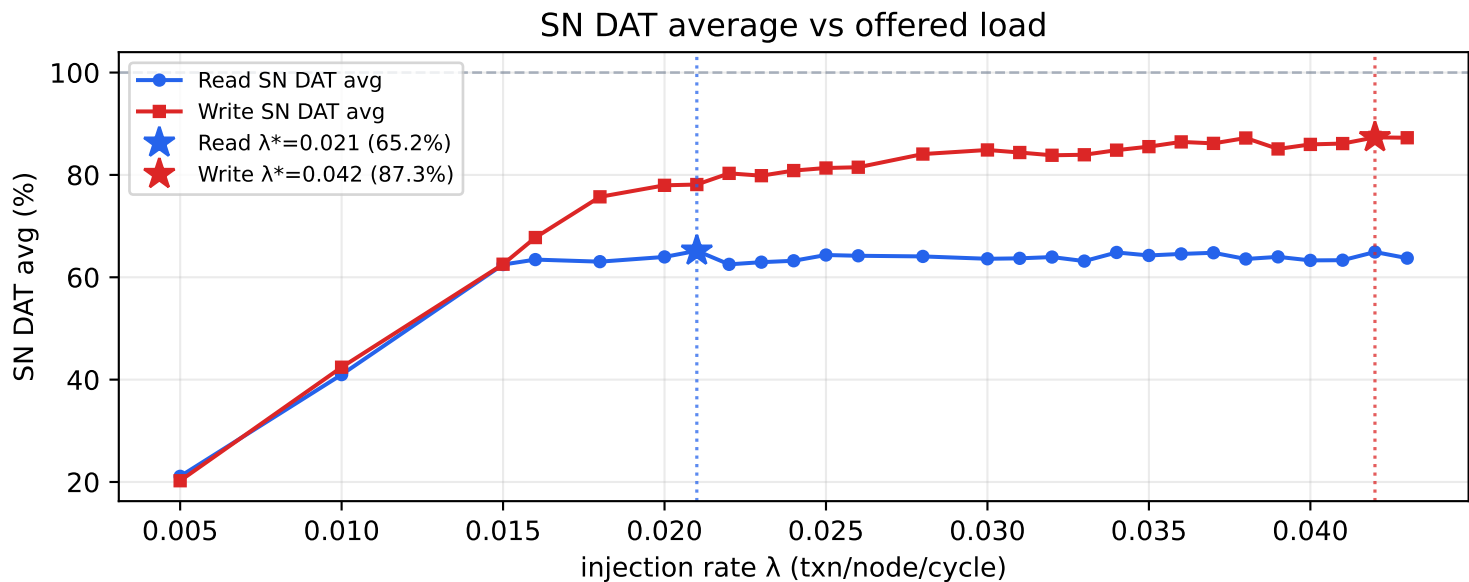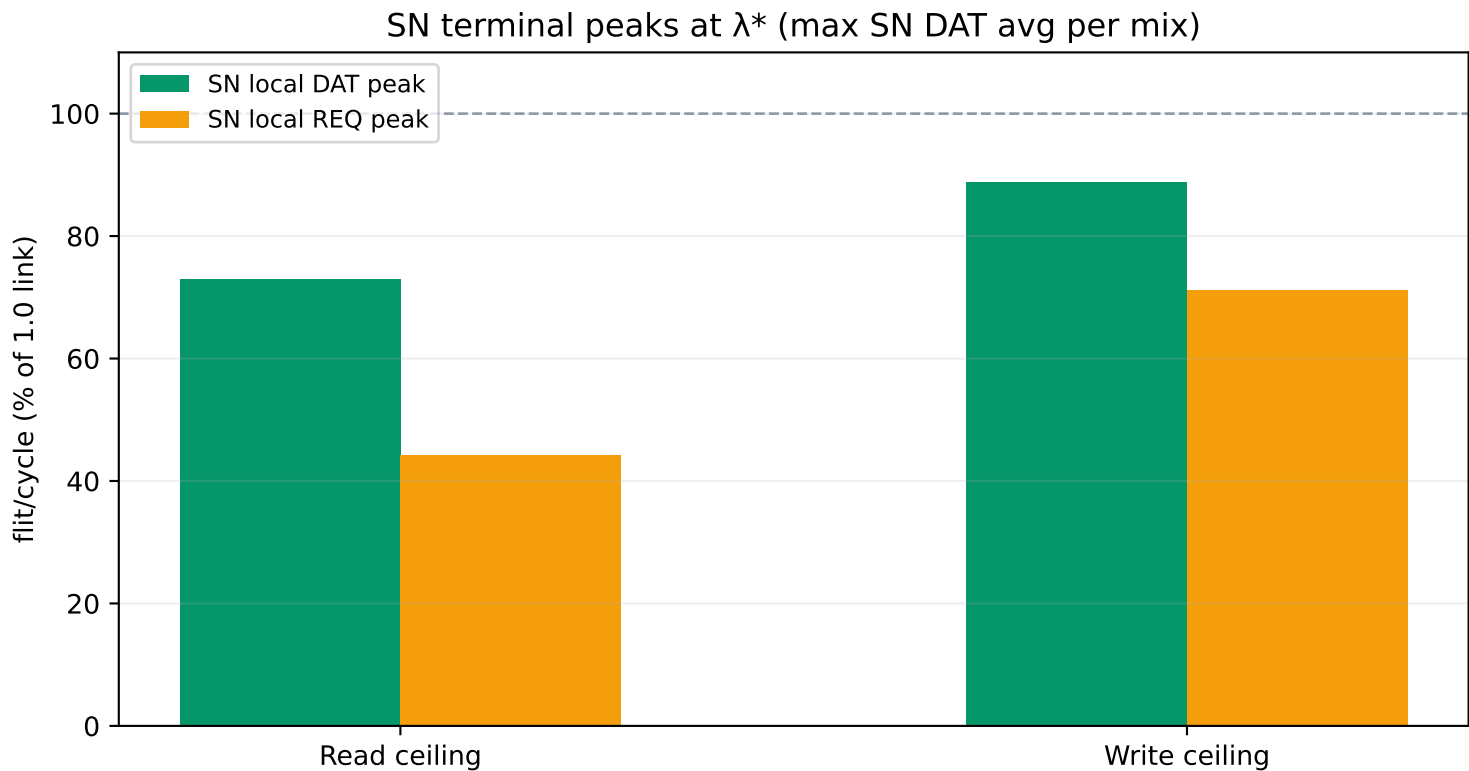

Path	λ^* (max avg)	SN DAT peak	SN DAT avg	SN REQ peak	SN REQ avg	State
Read	0.021	73.0%	65.2%	44.2%	42.9%	UNSTBL
Write	0.042	88.8%	87.3%	71.2%	69.8%	UNSTBL