


SN Terminal Local Peaks vs E2E DAT Utilisation (DATA_FLITS=2, read/write ceiling mixes)

At best lambda per row: SN inject/eject peak vs mesh E2E delivery

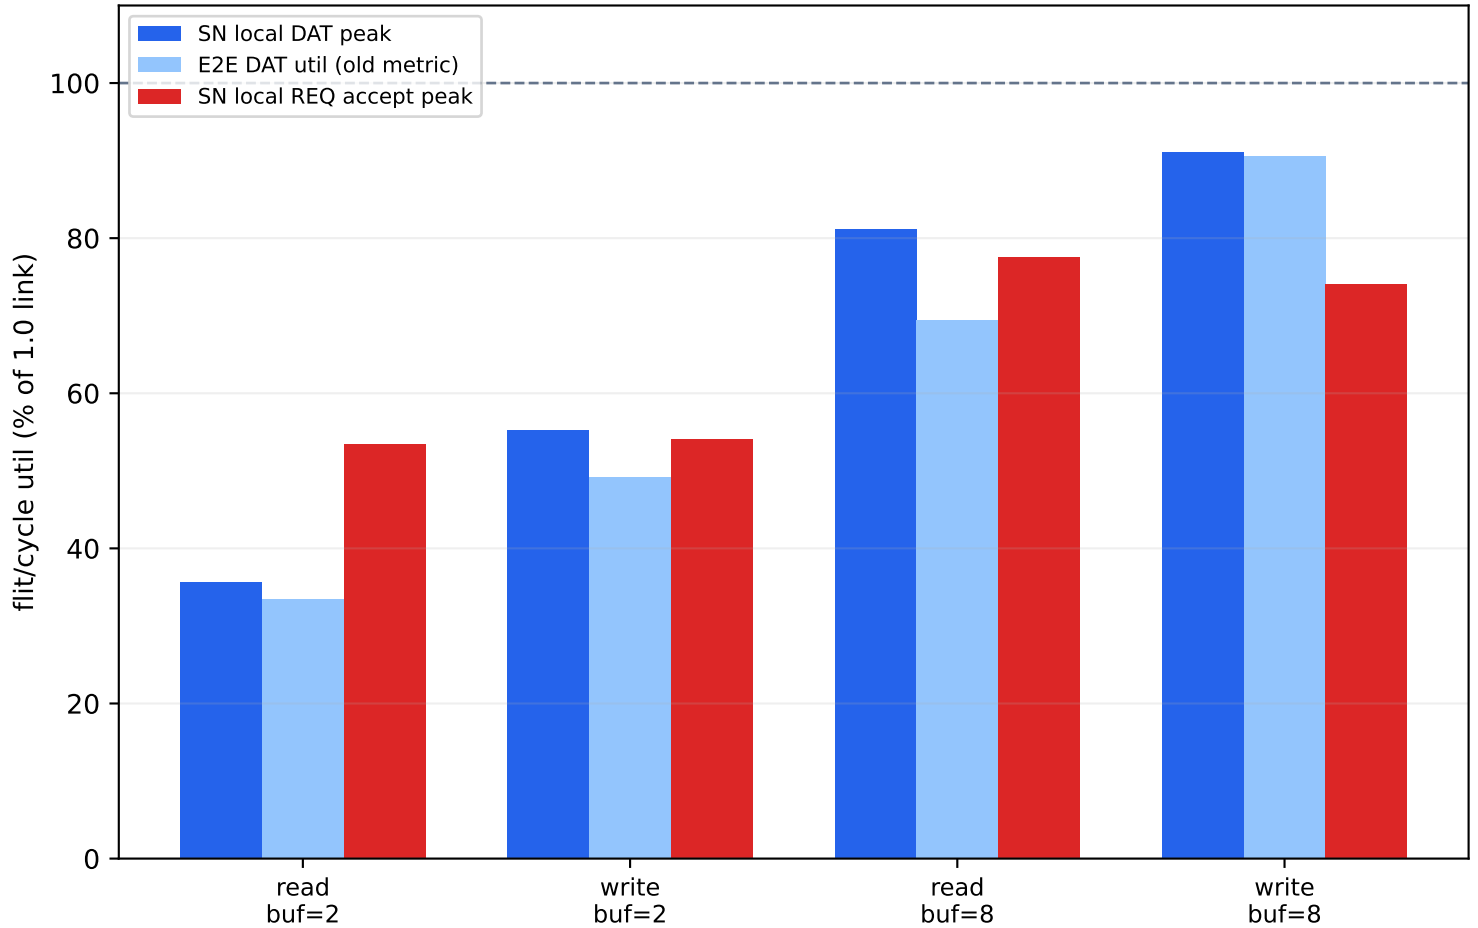

mix	buf	lambda	SN DAT peak	SN DAT avg	E2E DAT util	SN REQ peak	SN REQ avg	dat metric
read	2	0.8	0.357	0.348	33.4%	0.534	0.516	read_dat_sent_max
write	2	0.5	0.552	0.492	49.2%	0.541	0.512	write_dat_acc_max
read	8	0.5	0.812	0.740	69.5%	0.775	0.766	read_dat_sent_max
write	8	0.05	0.911	0.905	90.5%	0.741	0.727	write_dat_acc_max

SN local DAT read = max sent_flits/cycle at nodes 168-171 (CompData inject).
 SN local DAT write = max accepted_flits/cycle at SN (L3EvictData eject).
 SN local REQ = max accepted_flits/cycle at SN for HN->SN request class.
 E2E DAT util = sweep_sn_throughput metric (read: delivered to RN; write: to SN).