


OSC/PLL/RTC/OTP/PMU

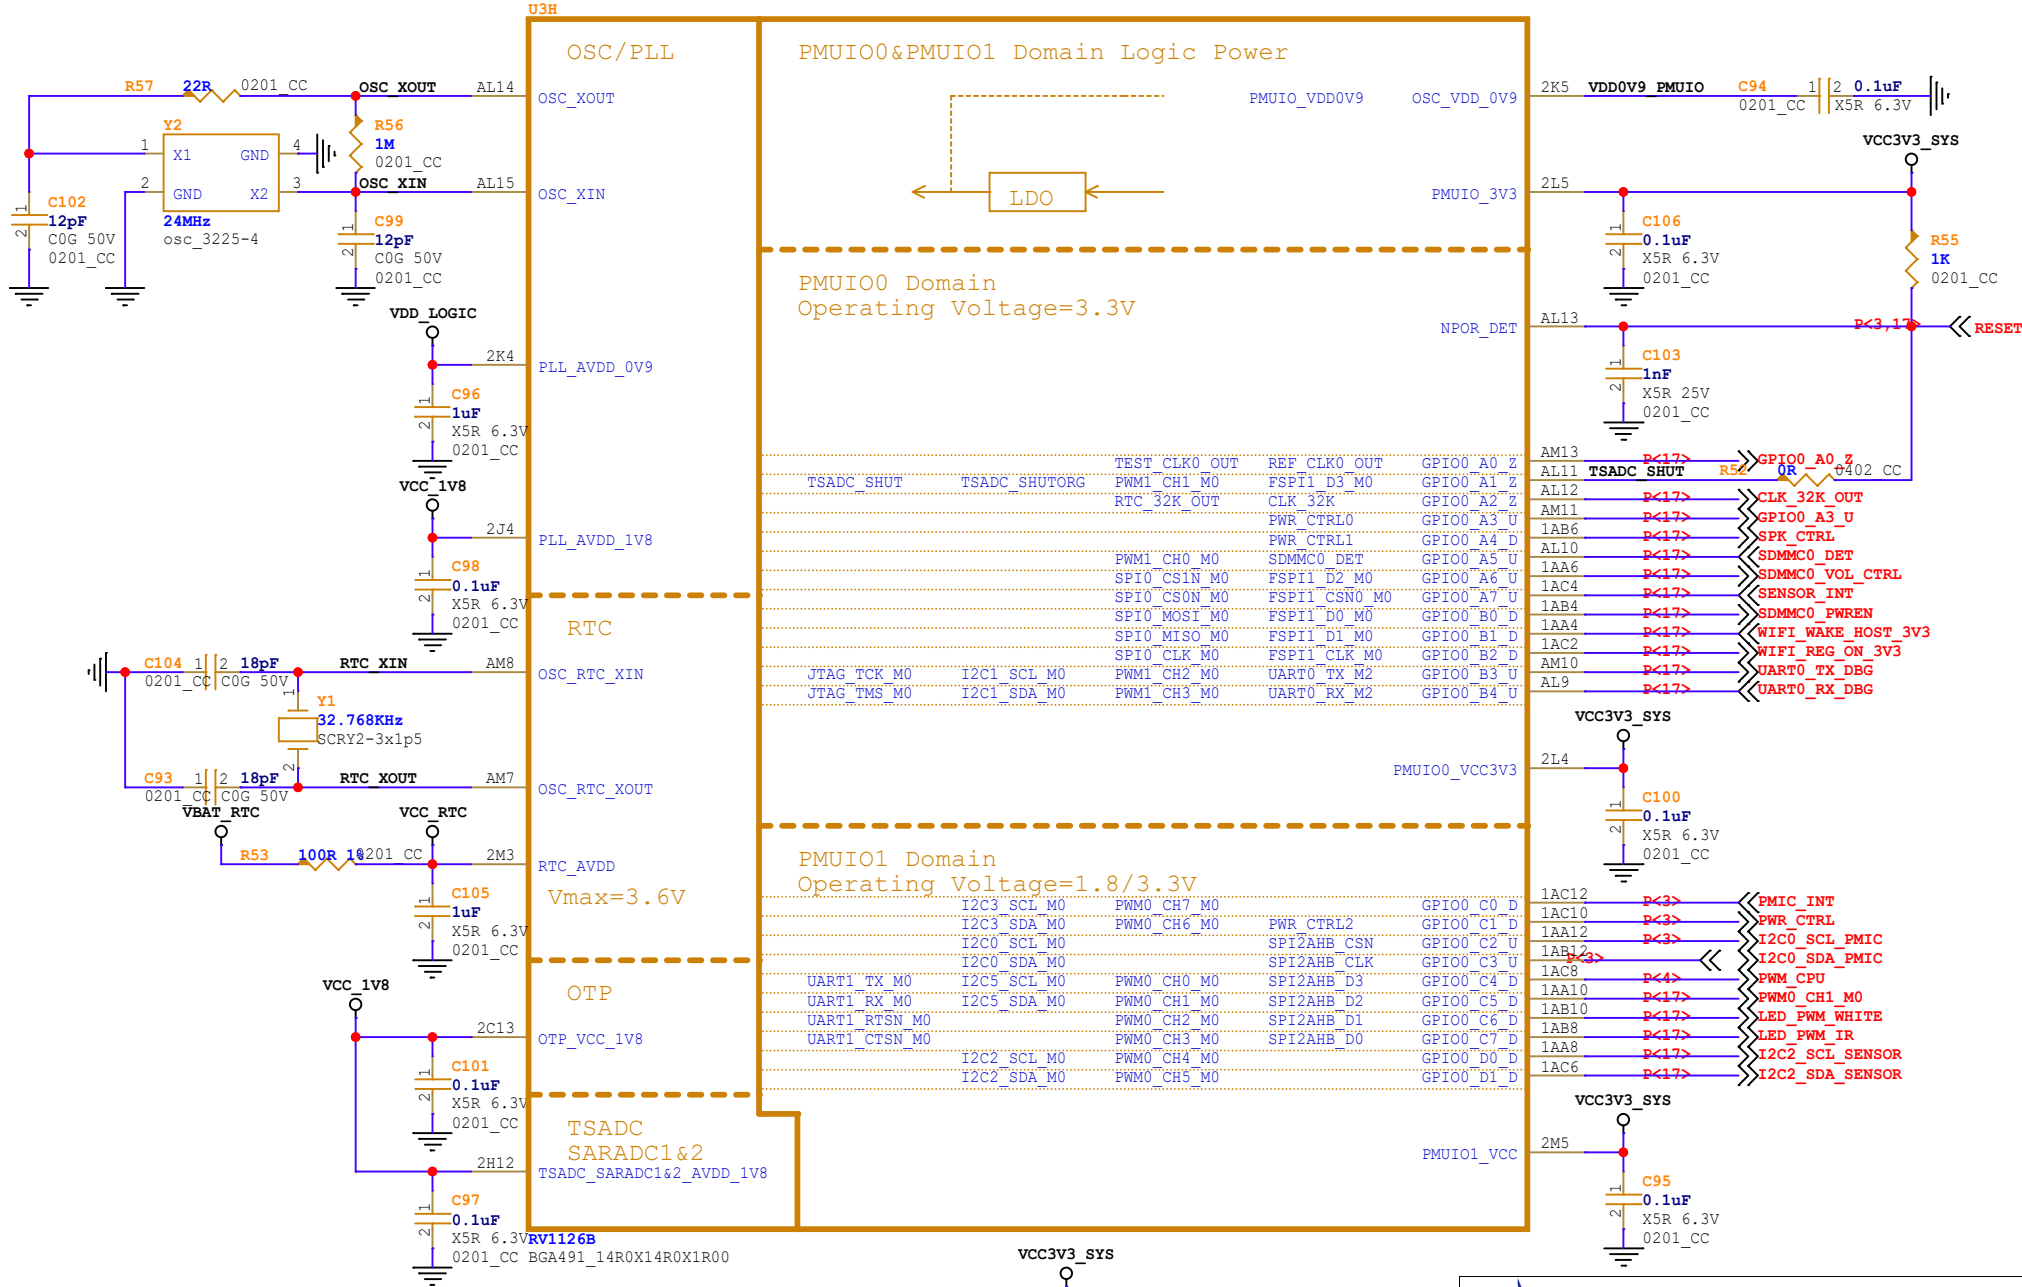

明远智睿

the full service solution provider for high-end electronics.

Title 历史版本

Size A4


Document Number RV1126B-OSC/PLL/RTC/PMU

Rev A

Date Monday, October 27, 2025


Sheet 6 of 17

USB Controller

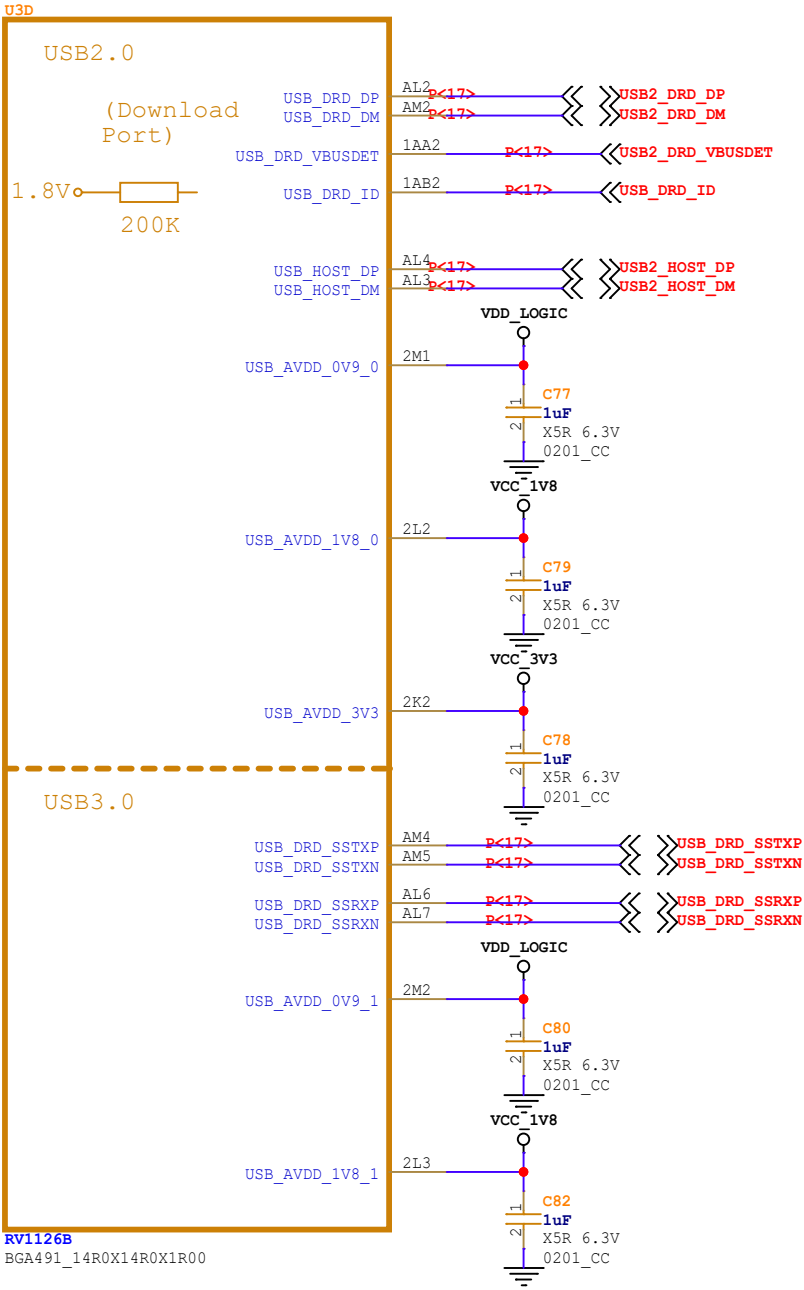

Note:

- USB2.0 design rules:
1. Trace impedance 90ohm+/-10%
 2. The distance between other signals follows the 3W rule.







明远智睿

the full service solution provider for high-end electronics.

Title		
历史版本		
Size	Document Number	Rev
A4	RV1126B-USB Controller	A
Date:	Wednesday, September 10, 2025	Sheet 9 of 17

SARADC0

SARADC0_IN1_CDS >> P<10,17>

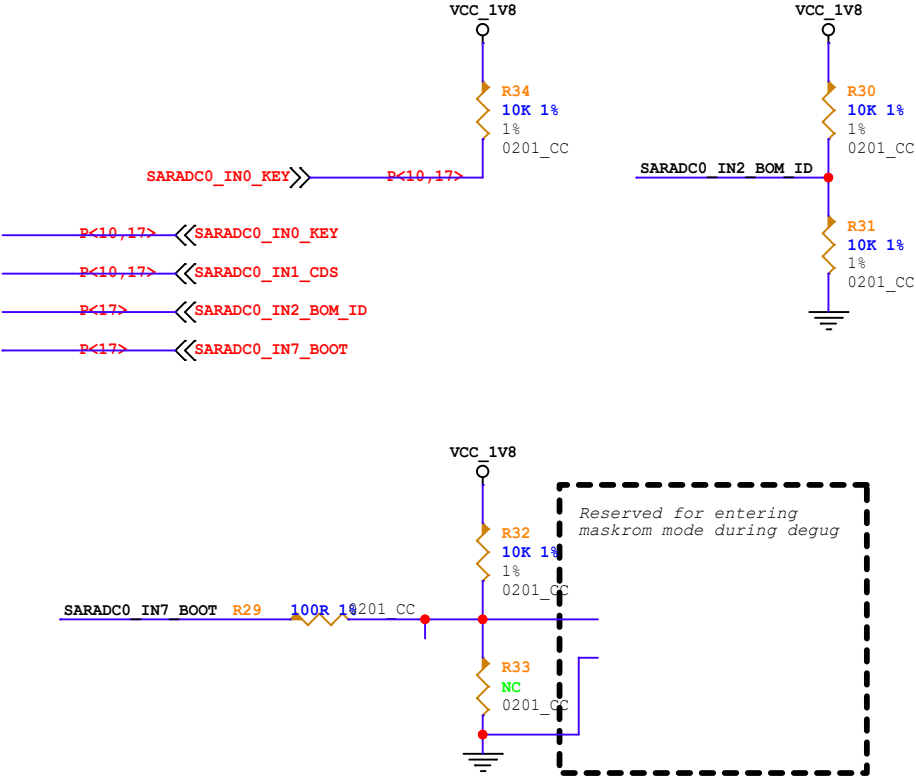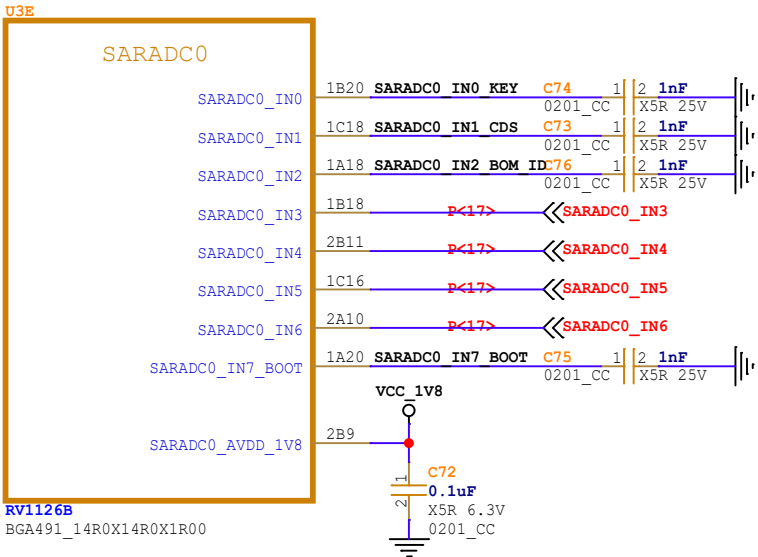

BOOT Mode Config of SARADC0_IN7

Item	Rup	Rdwon	Boot Mode
Config1	NC	10K	USB/UART0 (Maskrom mode)
Config2	100K	12K/27K	FSPI0--SDMMC0--USB/UART0
Config3	100K	51K/82K	FSPI0--EMMC--USB/UART0
Config4	100K	120K	EMMC--USB/UART0
Config5	100K	200K	EMMC--SDMMC0--USB/UART0
Config6	100K	330K/820K	SDMMC0--USB/UART0
Config7	10K	NC	FSPI0--EMMC--SDMMC0--USB/UART0 (Auto mode)



明远智睿


the full service solution provider for high-end electronics.

Title: 历史版本


Size: A4	Document Number: RV1126B-SARADC	Rev: A
----------	---------------------------------	--------

Date: Monday, October 27, 2025 Sheet: 10 of 17

VI_CIF/ETH/SAI/UART/PWM/I2C

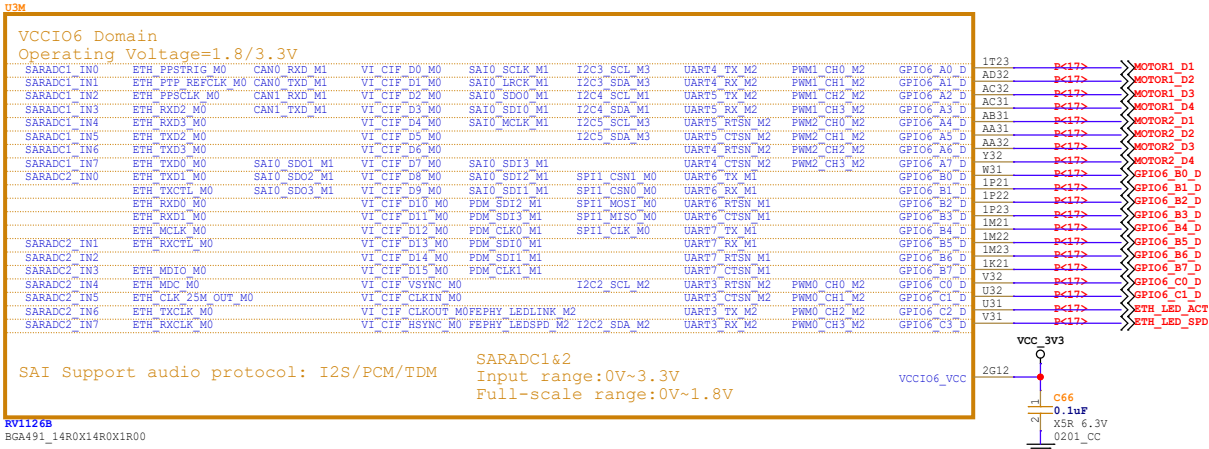

MIPI-CSI

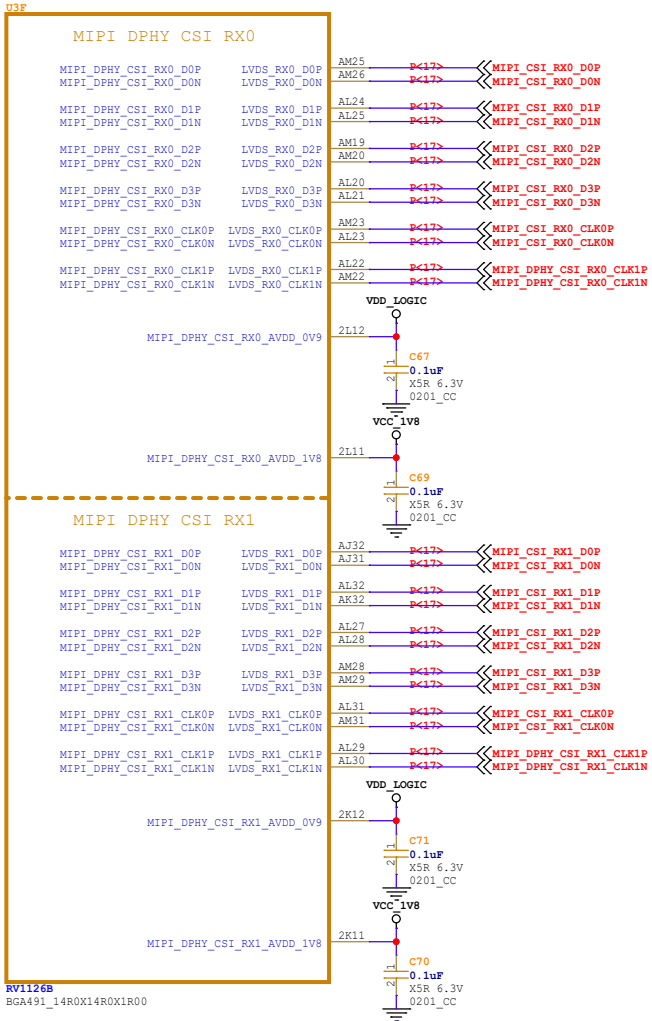



Note:

MIPI CSI RX design rules:


- Trace impedance 100ohm+/-10%
- The distance between other signals follows the 3W rule.

I2C/SPI/MIPI-CLK

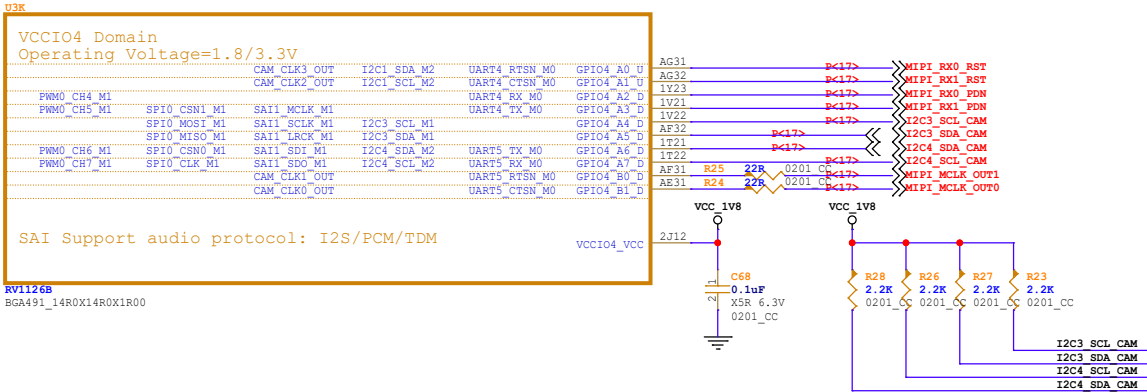

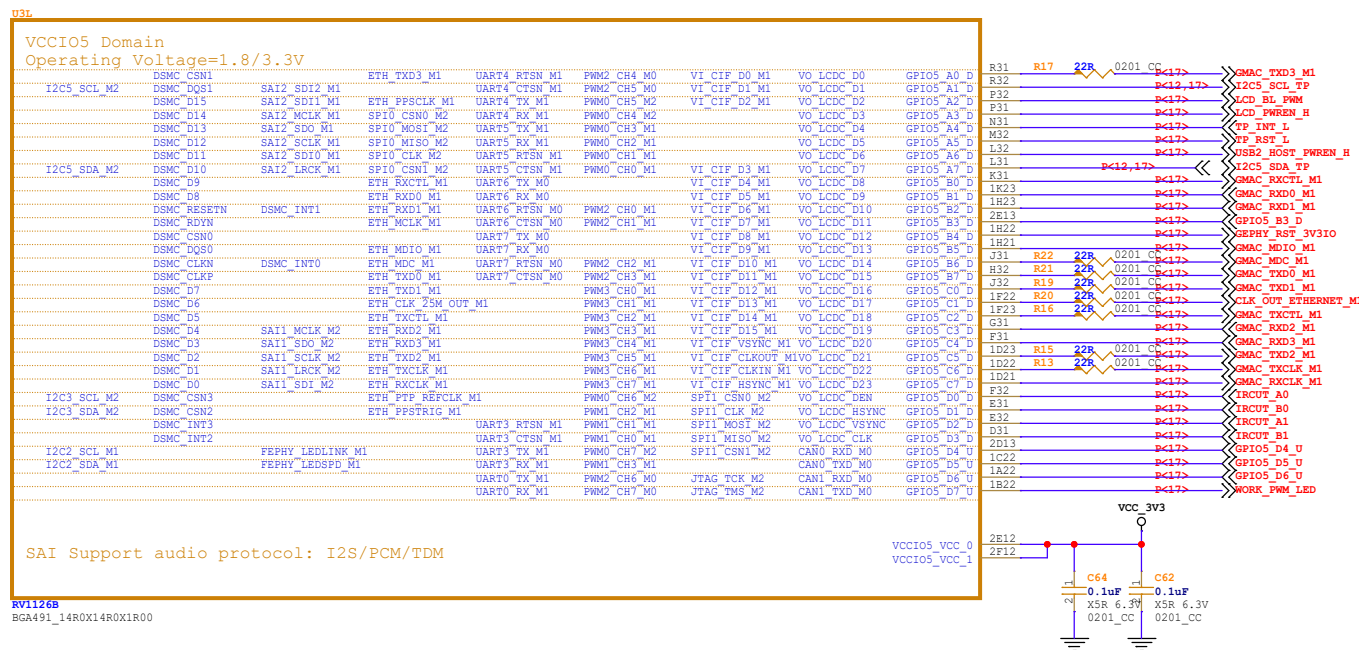

MIPI-DSI Interface

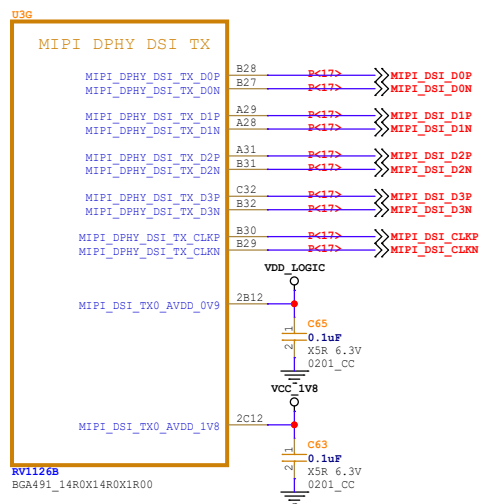


Note:


MIPI DSI RX design rules:

1. Trace impedance 100ohm+/-10%
2. The distance between other signals follows the 3W rule.

Audio Interface

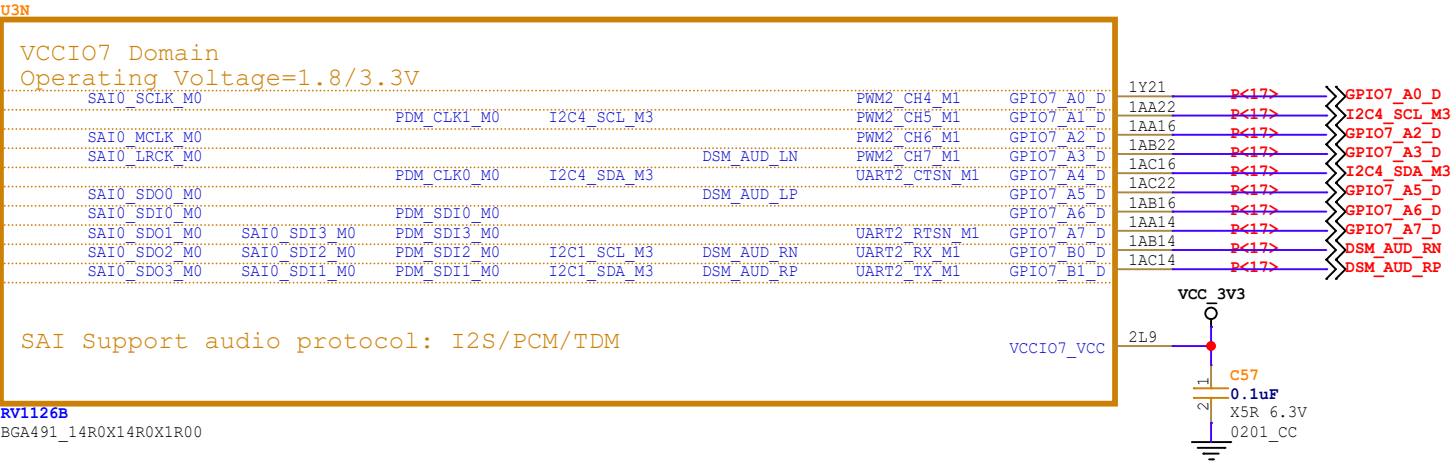

Audio ADC

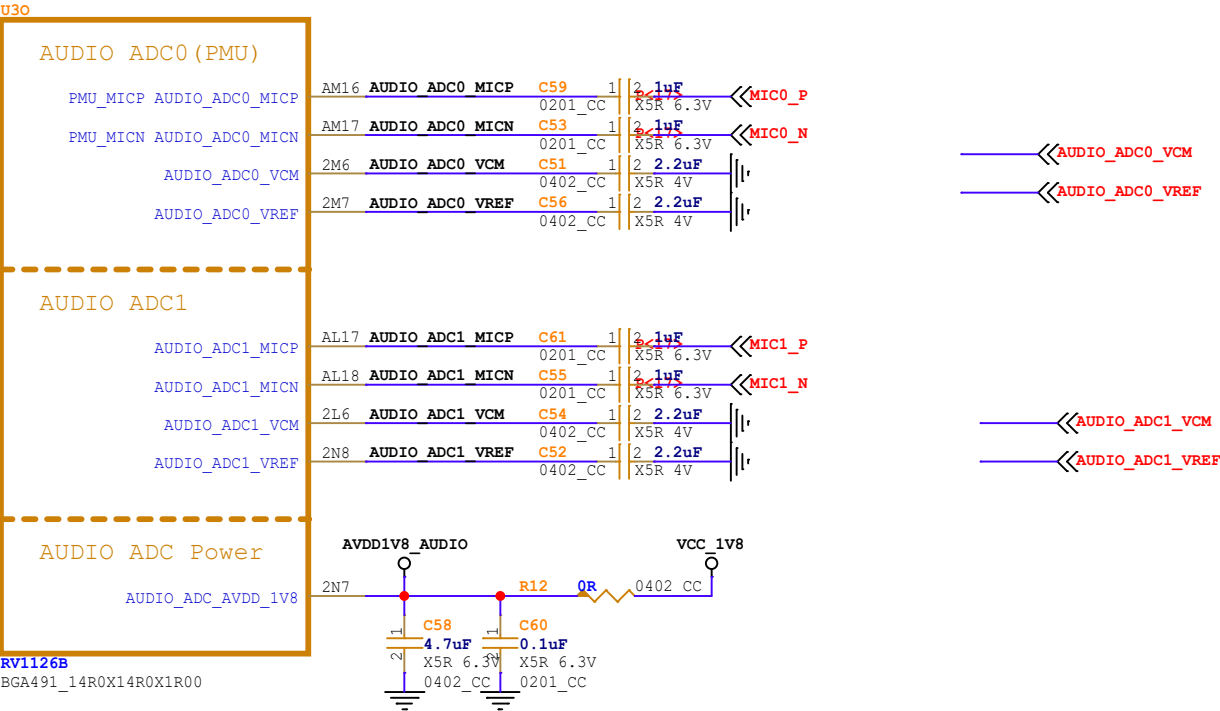




明远智睿

the full service solution provider for high-end electronics.


Title 历史版本		
Size A4	Document Number RV1126B-Audio	Rev A
Date: Wednesday, September 10, 2025	Sheet 13	of 17

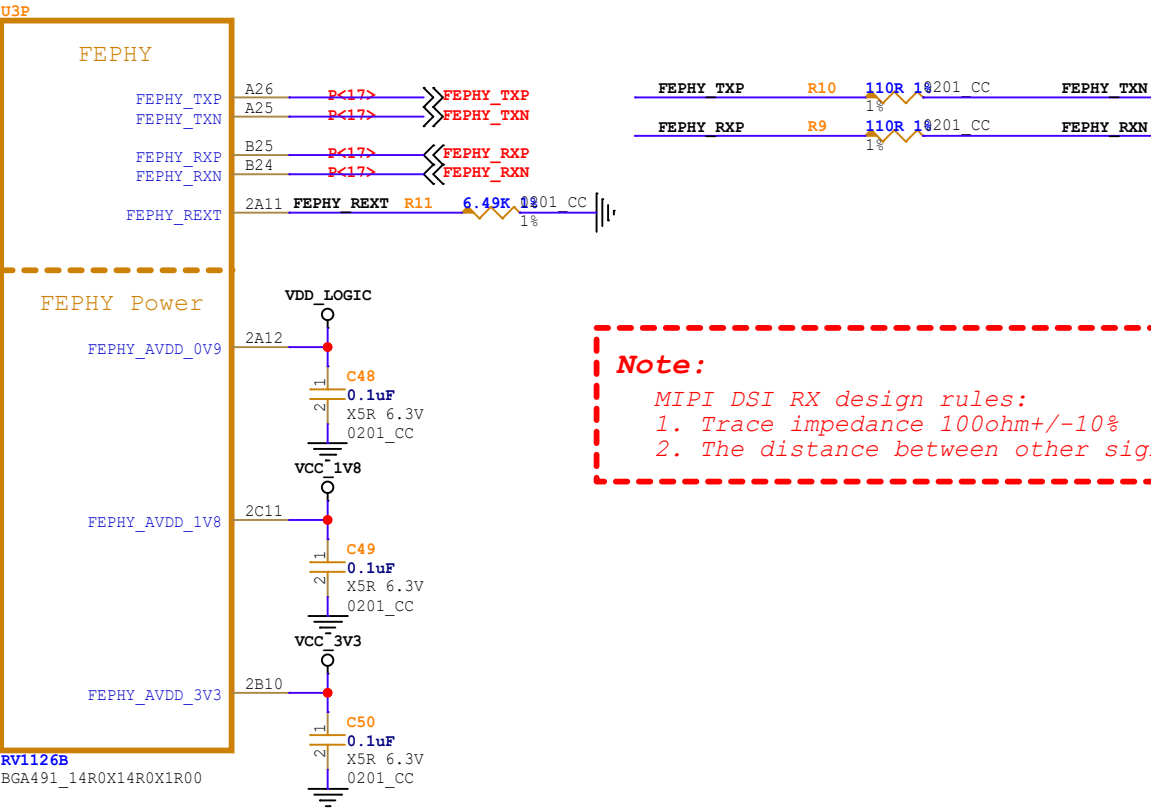

底板需要预留：#A10# NASROOM功能
#A20# Recovery功能

输入到核心板的电源：

VCC5V_VIO- 3A PIN: H1 H2 H3 H4 G4
VBAT_RTC- 1A PIN: E12 F12 G12
VCC3V3- 2A PIN: M9 M10 M11 M12 L12

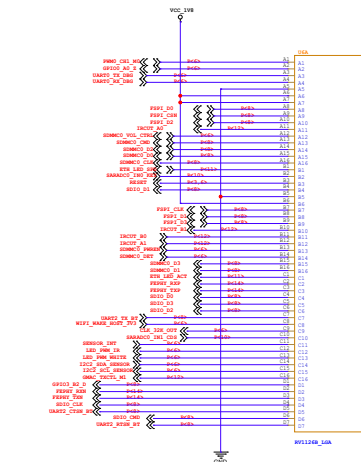

核心板输出的电源：

VCC1V0- 0.5A PIN: A6 A7 B6
VCC3V3- 1A PIN: M2
VCC3V3- 1.5A PIN: M3 M4 M5 N4

