
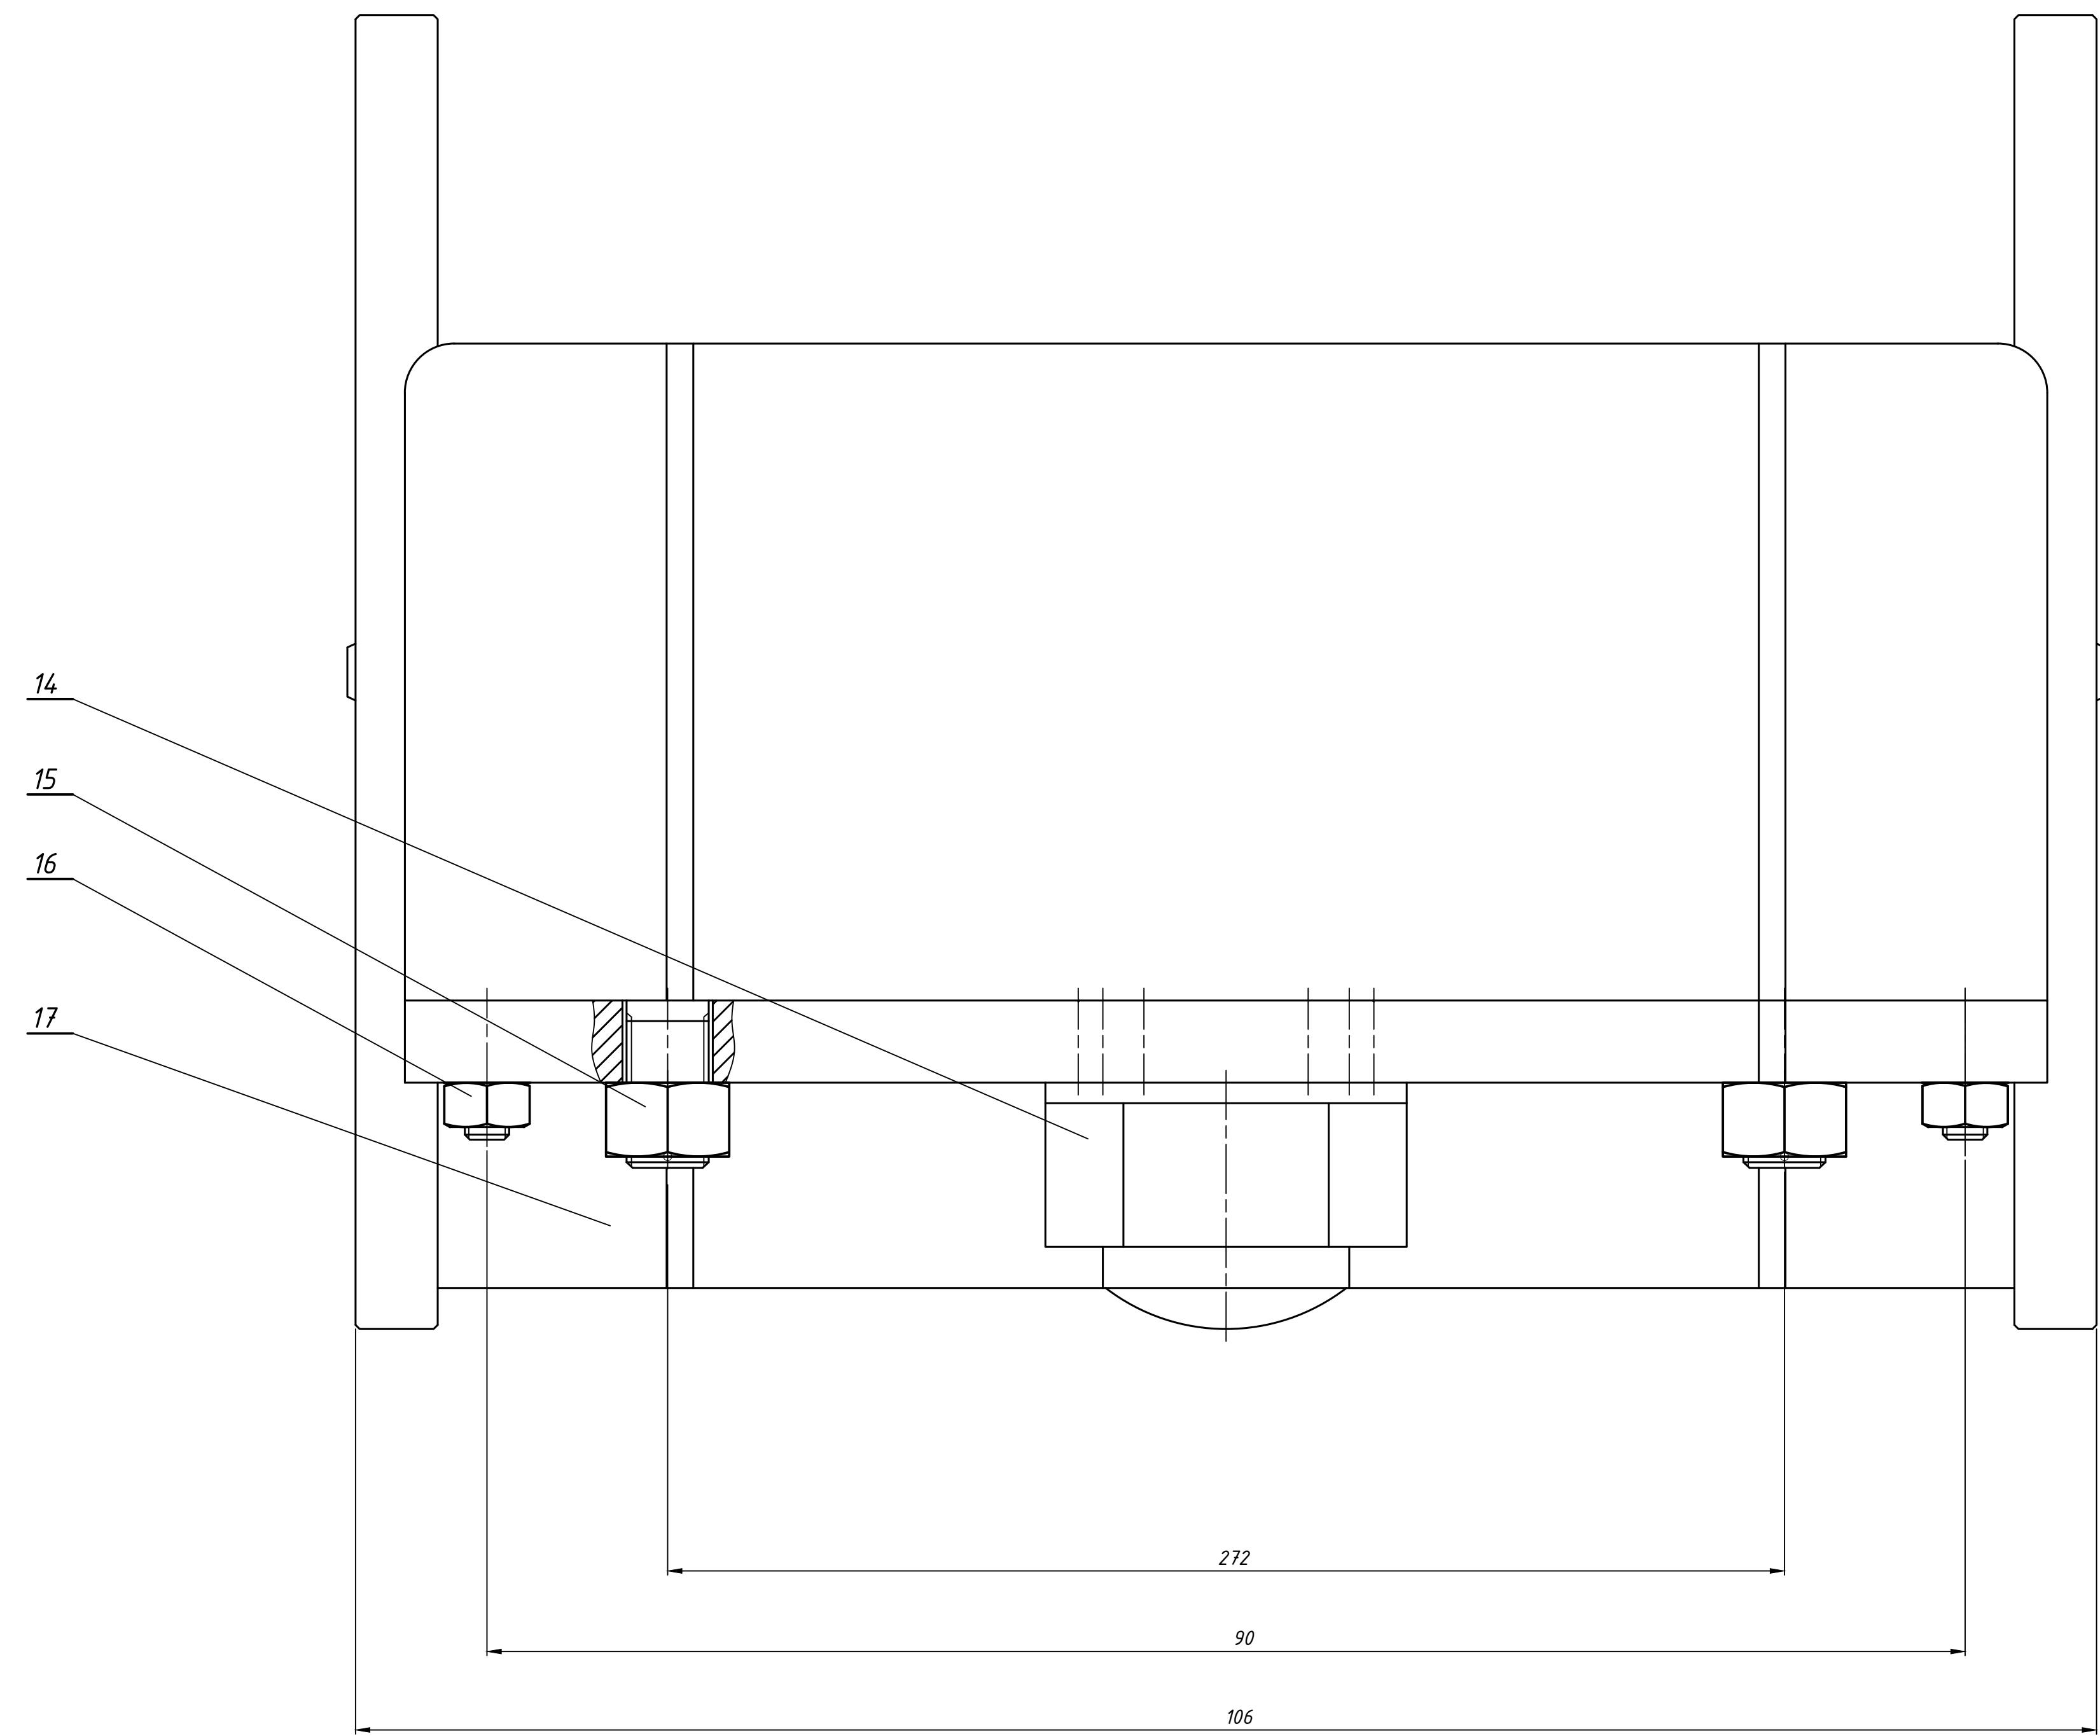
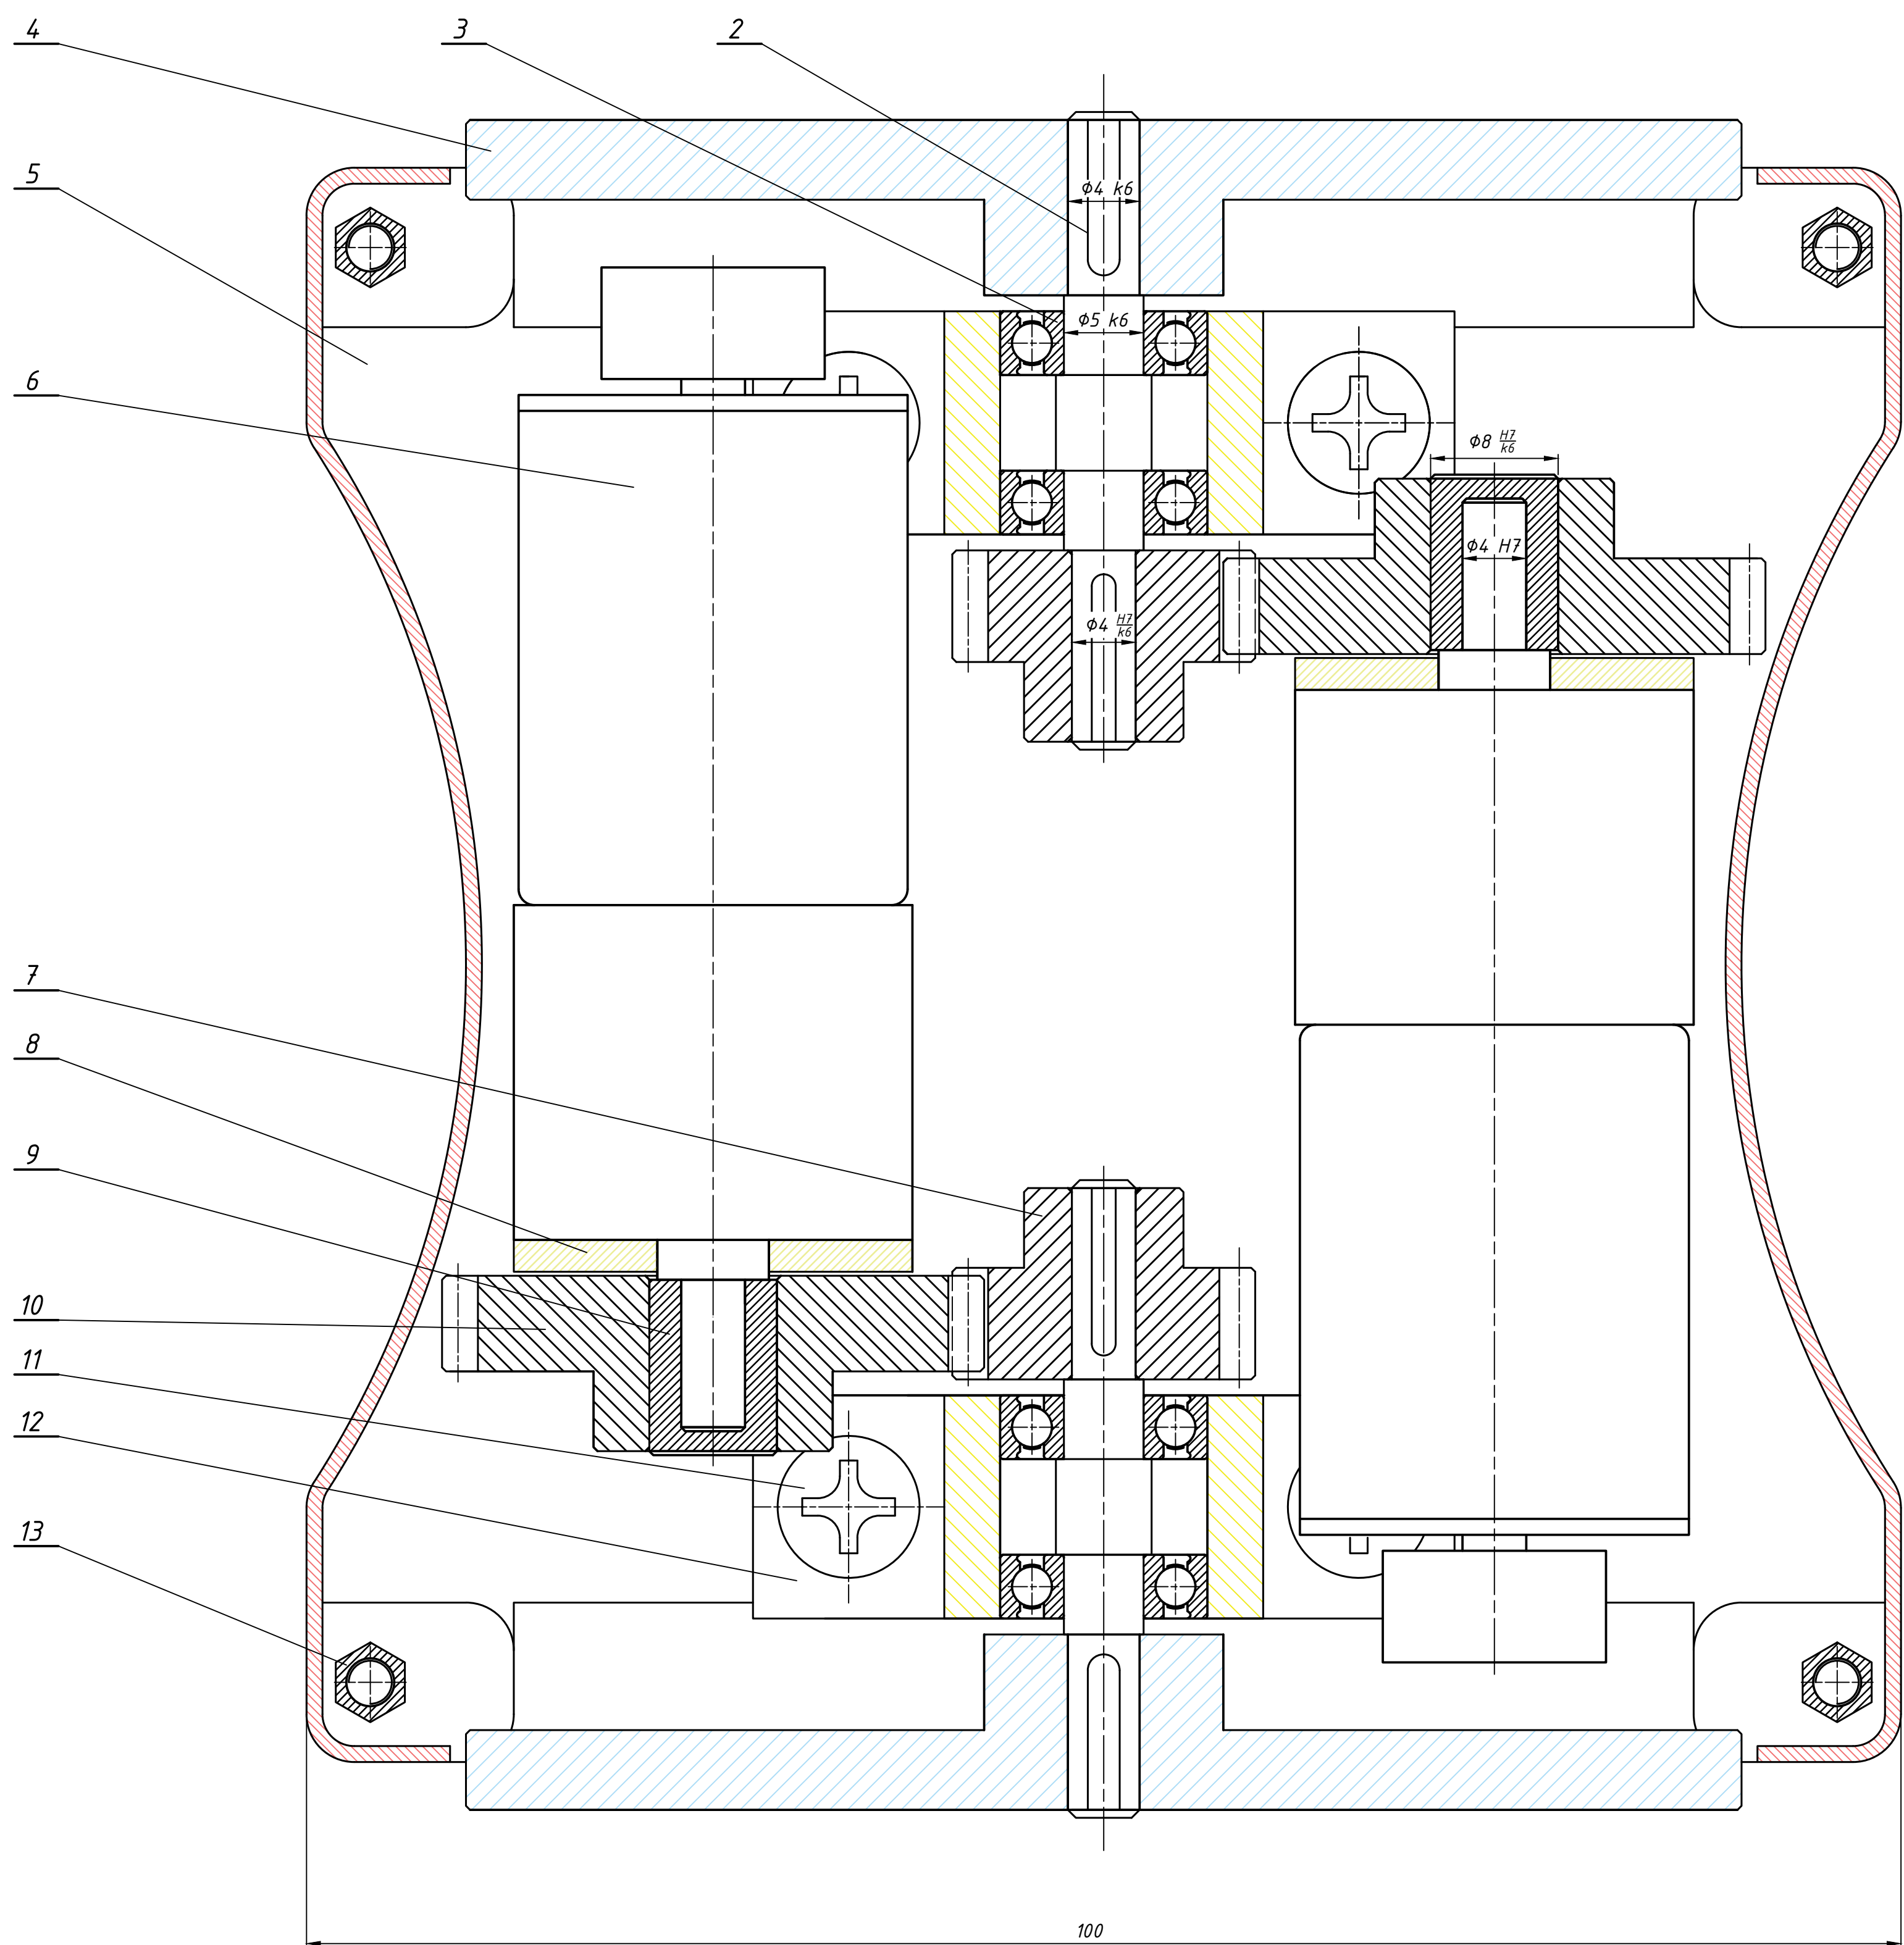


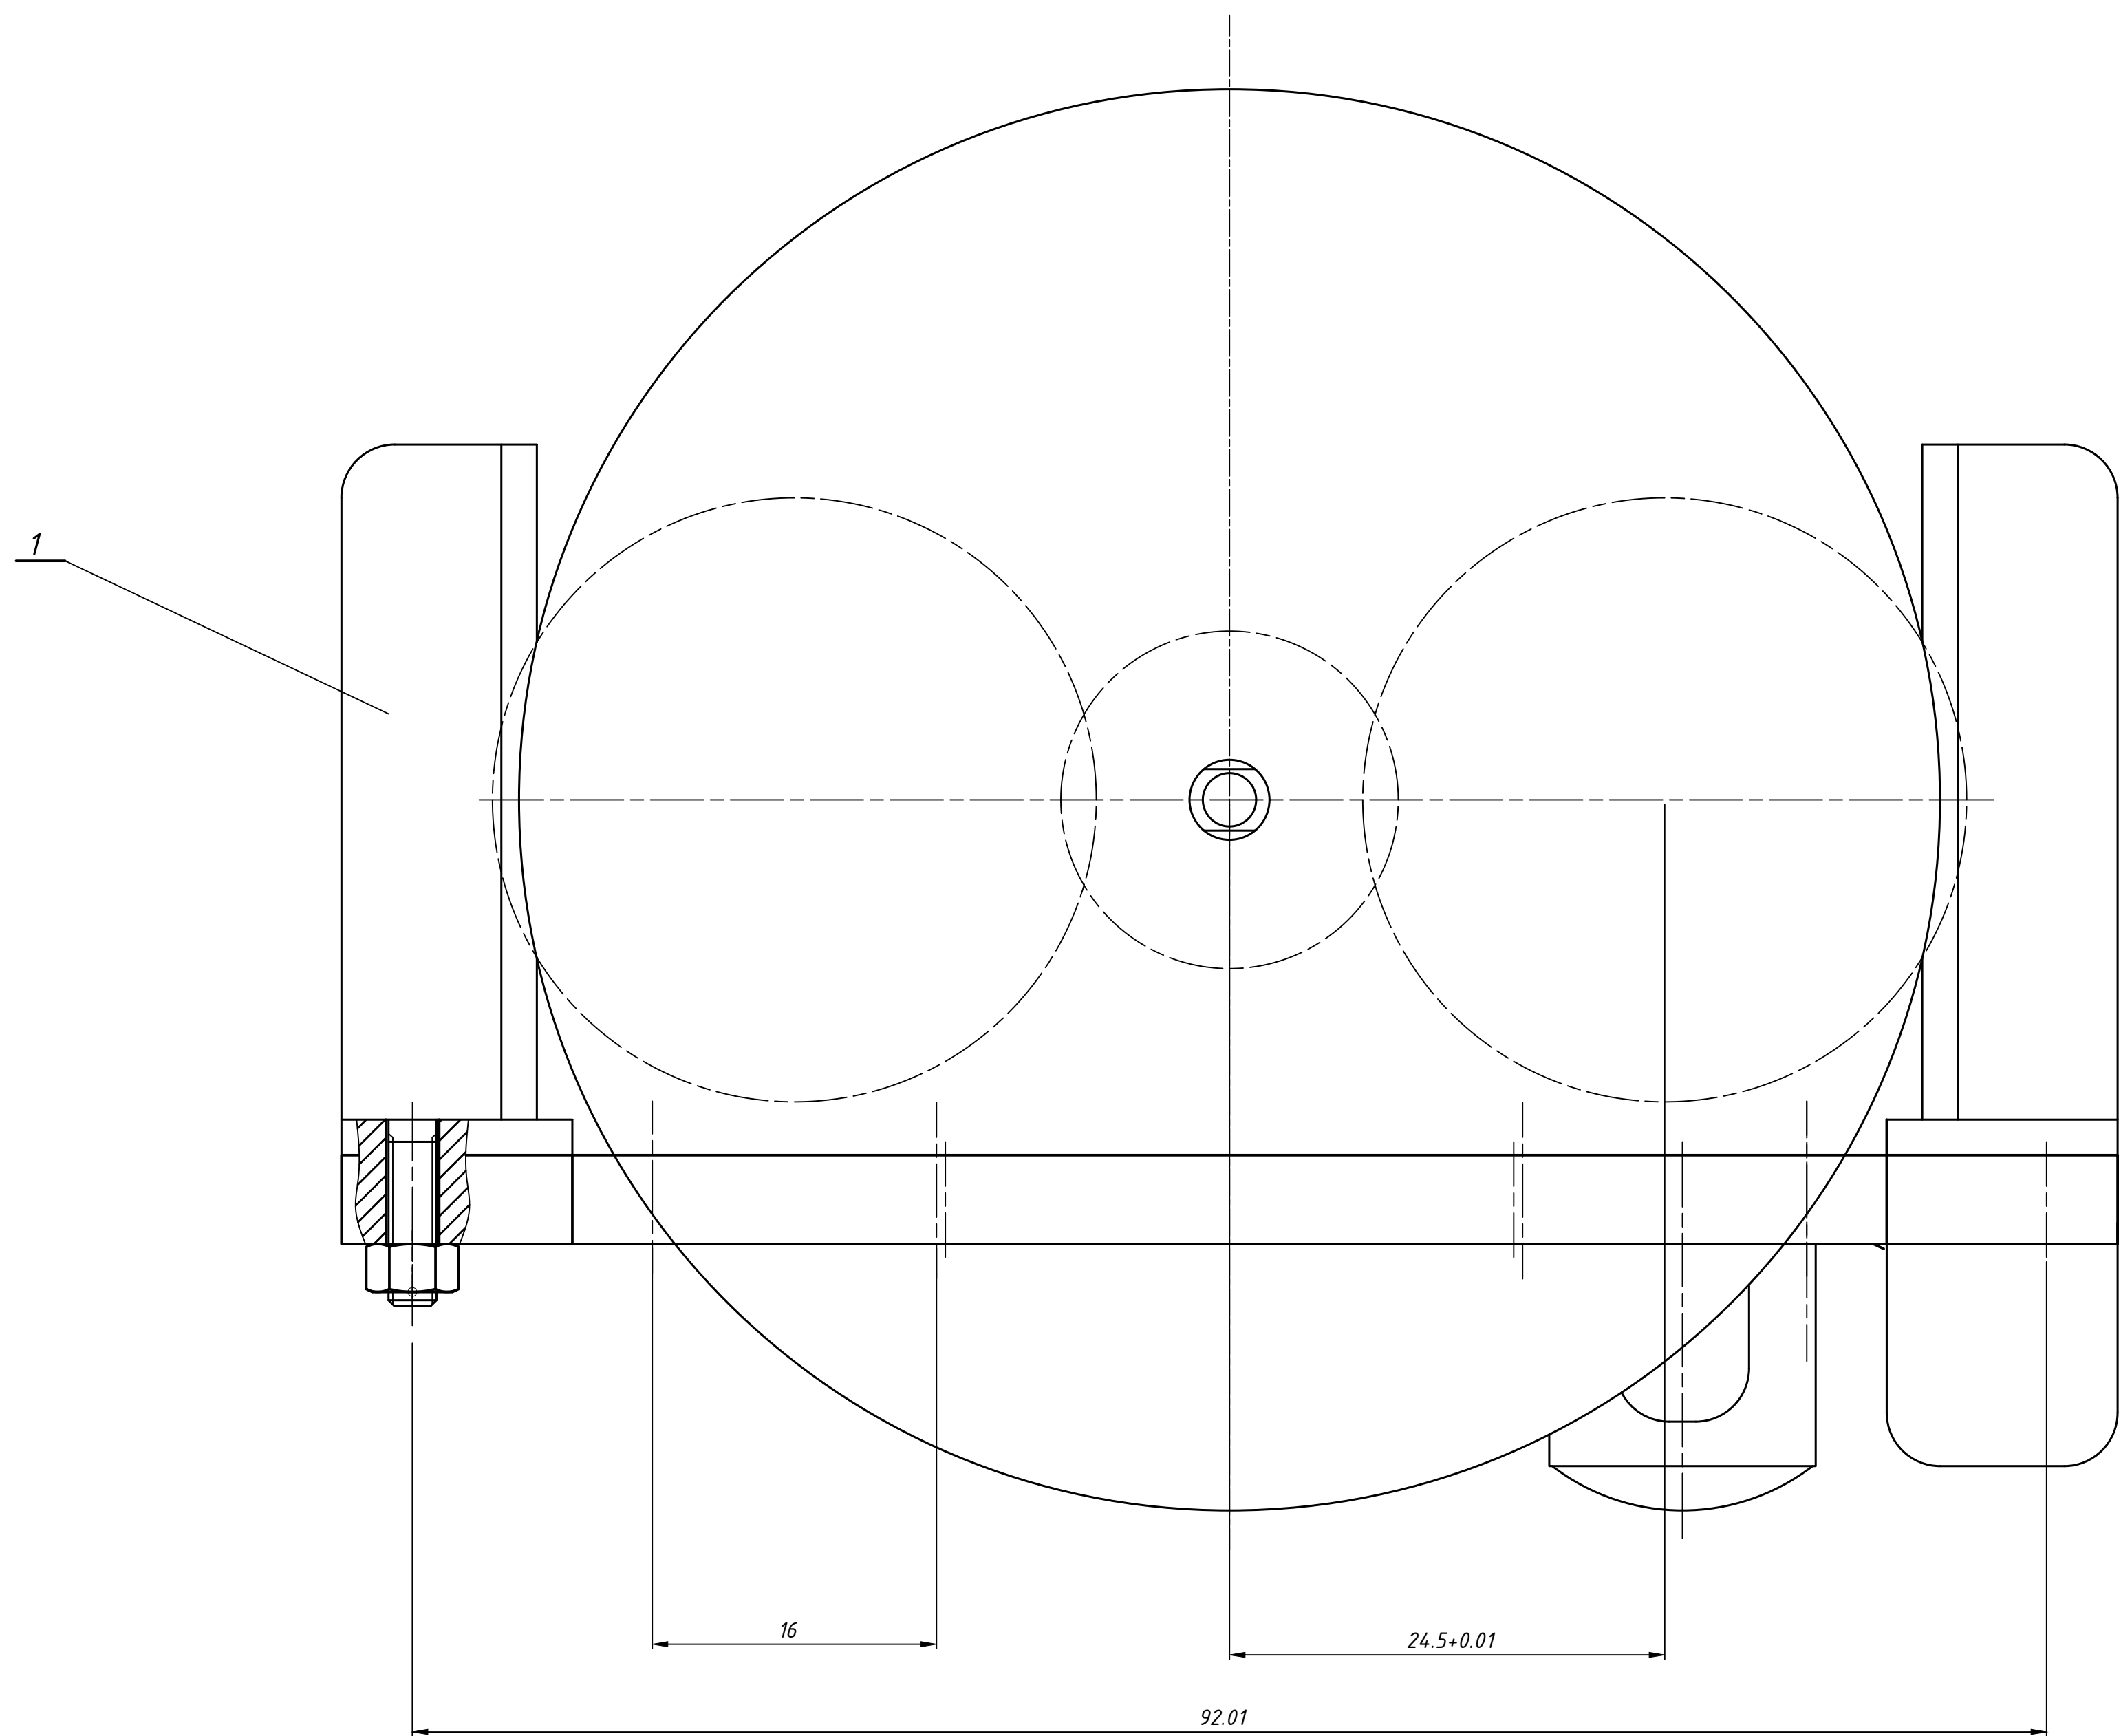

TECHNICAL TABLE OF THE GEARBOX

Parameter	Motor	I
Transmission ratio	0.5	
Rotation speed (rpm)	250	500
Power (W)	9.63	8.6
Moment M (N.mm)	368	164

TECHNICAL REQUIREMENTS

1. The wheel requires 2 screws to ensure the balance
2. Each gear need a screw instead of a key to be mounted
3. The installation need to ensure the shaft coaxial problem.

17	ME10	Sub base	1	Plastic	
16	HN11-A-600-M3	Hex nut M3	4	Steel	SUNCO
15	HN12-S13B-M5	Hex nut M5	4	Steel	SUNCO
14	MS000073	Passive wheel	1	Plastic	
13	ME09	Cooper bar	4	cooper	
12	ME08	Shaft housing	2	steel	
11		Truss Recessed Oval Countersunk Head Machine Screw - Type I			
10	ME07	Driving gear	2	steel	
9	ME06	Coupling	2	steel	
8	MS000524	DC geared motor mounting bracket	2	aluminum	
7	ME05	Driven gear	2	steel	
6	GA25	DC gearbox Motor encoder	2	steel	
5	ME04	Base	1	Plastic	
4	ME03	Wheel	2	Plastic	
3	619/5	Deep groove ball bearing	4	steel	SKF
2	ME02	Shaft	2	Steel	
1	ME01	Robot Cover	1	Plastic	

No.	Symbol	Name	Q.ty	Material	Note	
THESIS						
DESIGN SOCCER ROBOT						
	Name	Signature	Date	Quantity	Weight	Ratio
Designed by	Phan Tan Nam			01		4 : 1
Instructed by	Phan Cong Bang			Size A0	Sheet: 1	
Approved by				HCM University of Technology Faculty of Mechanical Engineering		