

Symantec Advanced Secure Gateway S200/S400/S500

Delivering Advanced Security for the Web in a Single, Powerful Solution

The web is one of the most common attack delivery mechanisms used by hackers to infect devices and infiltrate your network. Shut down the web attack vector and enable users to safely use the web (cloud) with the Symantec Advanced Secure Gateway. The Gateway offers the most comprehensive, integrated solution available to protect you from today's advanced web threats. With the Advanced Secure Gateway, you can tackle the rapidly changing threat landscape and confidently adopt cloud-based technologies to meet your business needs.

The Advanced Secure Gateway combines the functionality of Symantec's industry-leading Secure Web Gateway, ProxySG, with the intelligence of the Symantec Content Analysis to offer a single, powerful web security solution that delivers world-class threat protection. The Advanced Secure Gateway is a scalable proxy designed to secure your web communications and accelerate your business applications. The Gateway's unique proxy architecture allows it to effectively monitor, control and secure traffic to ensure a safe web (cloud) experience.

Many Secure Web Gateway products force you to make a trade-off between security and application performance. The Advanced Secure Gateway delivers both, providing comprehensive, advanced web security and web performance improvements. With the Advanced Secure Gateway, you can enforce policies, detect threats and block advanced attacks from entering your network to support a good, safe experience that helps you maximize the potential of the web (cloud) for your business.

Complete Protection and Control

The Symantec Advanced Secure Gateway provides comprehensive protection and control over web traffic to support your security and application performance requirements. The open solution can integrate with best of breed technologies to offer:

- Strong user authentication
- Advanced real-time web filtering and risk scores
- Multi-layered deep content inspection and analysis to identify data loss and threats

At-a-Glance

The Advanced Secure Gateway enables you to control and secure your web traffic to support safe, productive web experiences. The Advanced Secure Gateway delivers:

- Complete Protection and Control
- Layered Defenses
- Unmatched Performance and Reliability
- Lower TCO

- Security checks, leveraging the Symantec Global Intelligence Network
- Inspection and validation of SSL traffic
- Content caching and traffic optimization
- Bandwidth management
- Streaming media splitting and caching
- Method level controls, per protocol

Layered Defenses Security Framework

With the Advanced Secure Gateway, web traffic is terminated at the proxy and all downloaded and uploaded objects are processed through multiple layers of security in a single efficient pass. The solution starts by eliminating well-known threats first, which reduces the amount of traffic that needs to be processed by any subsequent, more CPU-

intensive security engines. With support for real-time URL ratings, multiple anti-malware engines, black and white listing, static code analysis and sandbox brokering, the Advanced Secure Gateway provides the most comprehensive and secure framework for web security.

Unmatched Performance and Reliability


Built on the same architecture and hardware base as the ProxySG, which is trusted by many of the world's largest organizations, the Advanced Secure Gateway delivers unmatched performance and reliability in the Secure Web Gateway space. Symantec's appliances are purpose built, with a custom operating system designed for security. The solution offers features, such as redundant hot swappable power supplies and disks, along with dual redundant boot devices, redundant fan architecture, fail-to-wire

network ports, and automatic power supply failover to maximize up-time and availability.

Scalability and Lower TCO

With Symantec, you can scale your deployment to meet your specific requirements, enabling you to pay for what you need and eliminating any costly overprovisioning. There is a wide array of models to choose from, so it's easy to find the right Advanced Secure Gateway that meets the security and performance levels required by your organization. It's also easy to increase the solution's performance with available upgrade kits. As a result, you can maximize your investment, starting with a lower entry point, with the ability to grow as your organization expands.

The Gateway can be deployed using a physical, virtual, cloud and/or hybrid model.

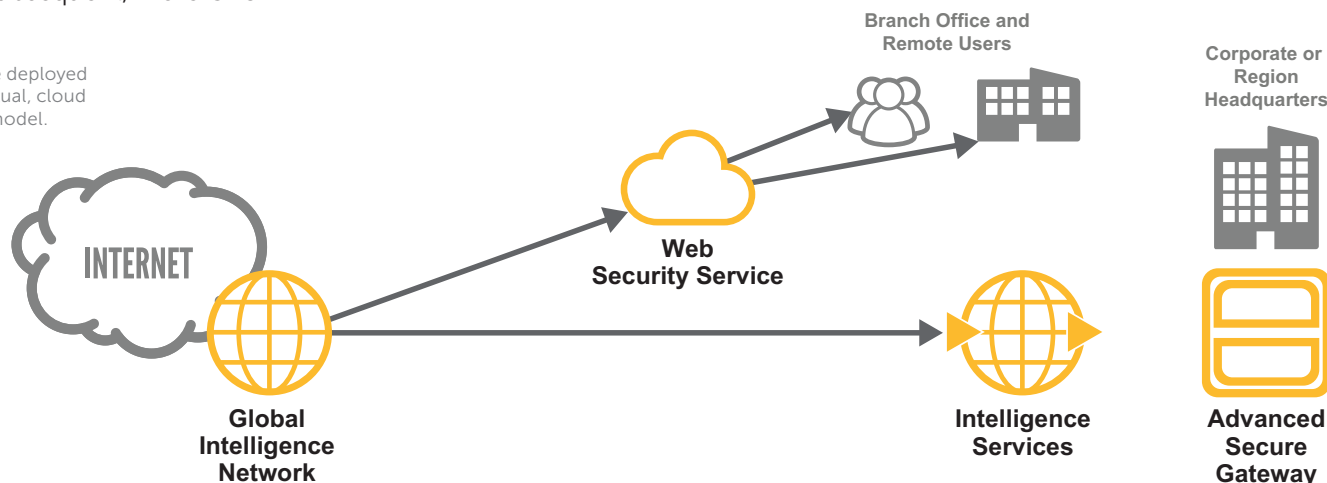

ASG	ASG S200-30	ASG S200-40	ASG S400-20	ASG S400-30	ASG S400-40	ASG 500-10	ASG S500-20
License Capacity							
Employee Count	500, 1000, 2500	1000, 2500	1000, 2500, 5000	5000, 10000, 15000	10000, 15000, 25000	10000, 15000, 25000	25000, 35000, 50000
System							
Disk Drives	2 x 500GB SATA	2 x 500GB SATA	3 x 1TB SAS	6 x 1TB SAS	8 x 1TB SAS	8 x 1TB SAS	16 x 1TB SAS
Boot Device	Single 16GB SSD		2 x 8GB SSD (dual redundant)				
RAM	16GB	16GB	24GB	48GB	72GB	96GB	128GB
Onboard Ports ¹	(2) 1000Base-T Copper ports (with bypass) (2) 1000Base-T Copper ports (non-bypass) (1) 10/100Base-T Copper, BMC Management Port					(2) 10Gb Base-T Copper ports (with bypass) (2) 10Gb Base-T Copper ports (non-bypass) (1) 1000Base-T Copper, System Management Port (1) 1000Base-T Copper, BMC Management Port	
Optional NICs	4 x 10/100/1000Base-T (Copper with bypass capability) 4 x 1GbE Fiber-SX (with bypass capability, full height slot only)		4x10/100/1000Base-T (Copper with bypass capability) 4x1GbE Fiber-SX (with bypass capability, full height slot only) 4x1GbE Fiber-LX (with bypass capability) 2x10Gb Base-T (Copper with bypass capability) 2x10Gb Base-T (Copper non-bypass), 2x10Gb Fiber (SR with bypass capability) 2x10Gb Fiber (LR with bypass capability)				
Available Slots	1 full height		1 full height / 1 half height			2 full height	2 full height / 3 half height
Power Supplies	1	1	2	2	2	2	2

¹ BMC ports are currently disabled. Ports specified as 1000Base-T Copper ports are 10/100/1000Base-T capable, and ports specified as 10Gb Base-T Copper are also 1000Base-T capable.

Physical Properties	ASG S200	ASG S400	ASG S500
Dimensions and Weight			
Dimensions (L x W x H)	446.3mm x 440.0mm x 43.5mm (17.57in x 17.32in x 1.71in) (chassis only) 454.5mm x 482.6mm x 43.5mm (17.89in x 19.0in x 1.71in) (chassis with extensions) Note: 640mm L (25.81in L) with optional slide rails 1 RU height	572mm x 432.5mm x 42.9mm (22.5in X 17.03in X 1.69in) (chassis only) 643mm x 485.4mm x 42.9mm (25.3in X 19.11in X 1.69in) (chassis with extensions) 1 RU height	710mm x 433.3mm x 87.2mm (27.95in x 17.05in x 3.43in) (chassis only) 812.8mm x 433.4mm x 87.2mm (32in x 17.06in x 3.43in) (chassis with extensions) 2 RU height
Weight (maximum)	Approx. 7.4 kg (16.4 lbs) +/- 5%	Approx. 12.8 kg (28 lbs) +/- 5%	Approx. 30 kg (66.12 lbs) +/- 5%
Operating Environment			
AC Power	100-127VAC @ 6A 200-240V @ 3A, 47-63Hz	Dual redundant and hot swappable power supplies, AC power 100-127V @ 8A 200-240V @ 4A, 47-63Hz	Dual redundant and hot swappable power supplies, AC power 100VAC @ 12A, 240VAC @ 5A, 50-60Hz
Total Output Power	350 Watts	450 Watts	1100 Watts
Thermal Rating	Typical: 785 BTU/Hr, Max: 1195 BTU/Hr	Typical: 1086 BTU/hr, Max: 1381 BTU/hr	Typical: 2598.42 BTU/Hr, Max: 3751 BTU/Hr
Optional DC Power	Not available	Input voltage range: 40.5V - 57V Input Max Current: 22A Total Output Power: 770W	Input voltage range: 40 - 72 VDC Input Max Current: 30A Total Output Power: 1100W
Temperature	5°C to 40°C (41°F to 104°F) at sea level		
Humidity	20 to 80% relative humidity, non-condensing		
Altitude	Up to 3048m (10,000ft)		
For All Advanced Secure Gateway S200, S400 and S500 Series			
Regulations	Safety	Electromagnetic Compliance (EMC)	
International	CB – IEC60950-1, Second Edition	CISPR22, Class A; CISPR24	
USA	NRTL – UL60950-1, Second Edition	FCC part 15, Class A	
Canada	SCC – CSA-22.2, No.60950-1, Second Edition	ICES-003, Class A	
European Union (CE)	CE – EN60950-1, Second Edition	EN55022, Class A; EN55024; EN61000-3-2; EN61000-3-3	
Japan	---	VCCI V-3, Class A	
Mexico	NOM-019-SCFI by NRTL Declaration	---	
Argentina	S Mark – IEC 60950-1	---	
Taiwan	BSMI – CNS-14336-1	BSMI – CNS13438, Class A	
China	CCC – GB4943.1	CCC – GB9254; GB17625	
Australia/New Zealand	AS/NZS 60950-1, Second Edition	AS/ZNS-CISPR22	
Korea	---	KC – RRA, Class A	
Russia	CU – IEC 60950-1	GOST-R 51318.22, Class A; 51318.24; 51317.3.2; 51317.3.3	
Environmental	RoHS-Directive 2011/65/EU, REACH-Regulation No 1907/2006		
Product Warranty	Limited, non-transferable hardware warranty for a period of one (1) year from date of shipment. BlueTouch Support contracts available for 24/7 software support with options for hardware support.		
Gov't Certifications	For further government certification information please contact Federal_Certifications@bluecoat.com		
More Info	Contact regulatoryinfo@bluecoat.com for specific regulatory compliance certification questions and support		