

TECHNICAL BULLETIN



MODEL/DERIVATIVE:
All Models

Bull. N°: **0017**
CDS. ref: **R6255bu**
Issue: **1**
Date: **1.11.95**

AFFECTED RANGE:
All versions

PROBLEM:
USE OF WIRING HARNESS CONNECTORS

Wiring or electrical component failure following previous wiring rectification.

CAUSE:
Unsuitable wiring connectors used for wiring repair resulting in subsequent failure in service.

ACTION:
THIS BULLETIN REPLACES THE OLD STYLE BULLETINS AS FOLLOWS:-
Mini no. 15 - item 29
Metro 1.0 & 1.3 no. 24 - item 56
Maestro no. 31 - item 77
Montego no. 36 - item 89
Rover 800 no. 42 - item 135

In the event of wiring rectification being required or where such action cannot be carried out by replacement of the existing type of connector, then it is permissible to use 'Crimp and Heatseal' type connectors supplied to Rover by Duraseal.

These connectors are available through normal parts supply channels, see parts information for details.

Note: These connectors were originally introduced for the Rover 'after market' burglar alarm installation kits and have been progressively supplied with other Rover and Unipart approved accessories.


INSTRUCTIONS FOR USE OF CONNECTORS

Full instructions are supplied with parts, however if mislaid, a copy of this information is as follows:-

DURASEAL SEALED CRIMP SPLICES:

For reliable crimping and sealing use the recommended crimping tool and heat gun with reflector.

- 1). Strip wires 7.5mm and insert into crimp barrel of the correct Duraseal size (see below).
- 2). match the colour of the splice and the colour of the crimp cavity on the crimping tool.
- 3). Crimp.
- 4). Heat crimping splice with heat gun until tubing recovers and adhesive melts and flows.

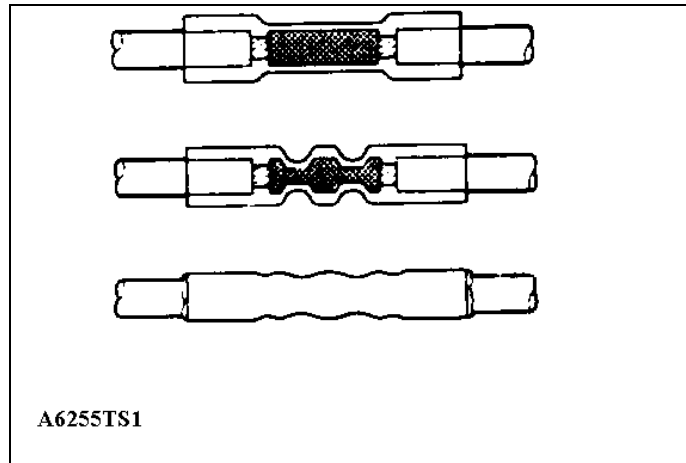

CONNECTOR SIZES:-

Ensure correct connector is used for cable size as follows:-

RED - part number GHF2512 - cables up to 1.5mm

BLUE - part number GHF2513 - cables up to 2.5mm

YELLOW - part number GHF2514 - cables up to 6mm

USAGE:

Where connectors are used in a suitable environment e.g. within the passenger compartment, crimping without heat sealing is permissible, however for external or engine compartment usage, the use of crimping and heat sealing must be undertaken.

Note: Spliced in connectors are permissible providing not more than two wires are inserted into any one cavity and connector is of adequate size for total cable size.

PARTS INFORMATION:

GHF2512 - Connector - RED

GHF2513 - Connector - BLUE

GHF2514 - Connector - YELLOW

WARRANTY CLAIMS:

Select a suitable complaint code as appropriate and apply a realistic non schedule time.