


Opamp Differential Amplifier

PART NUMBER	04A-015
GROUP NAME	Opamp Amplifiers (04A)
CIRCUIT NAME	Differential Amplifier
VARIANT DESCRIPTION	Single Supply, THD, DC Bias Trimmer, Testpoints
BOARD DESIGN	PCB50-A-07
PRODUCT DESCRIPTION	Panel of #04A-015 miniPCBs, v-scored (1 Panel = 4 Pieces)


Circuit Description

This circuit amplifies a small voltage signal.


Panel Board

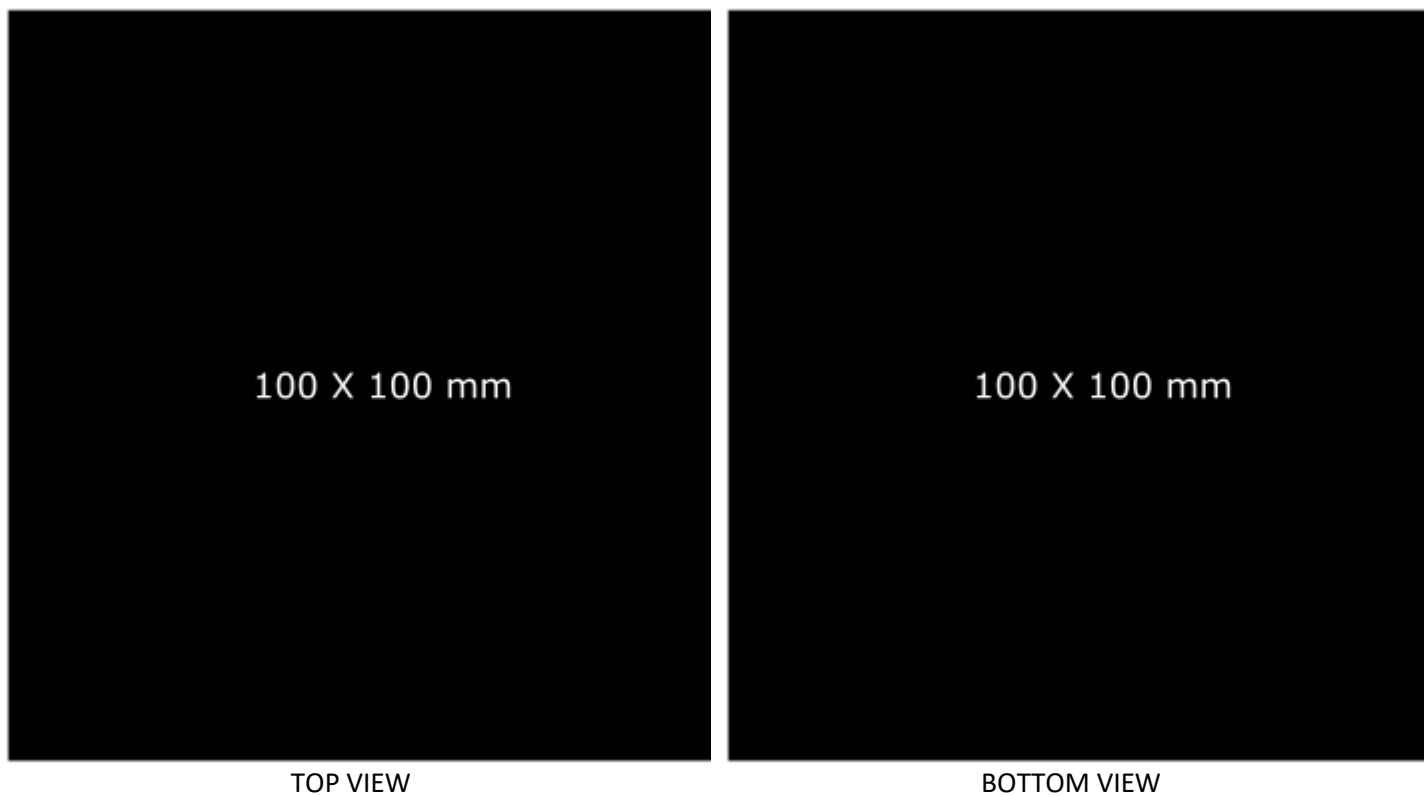

Single Board

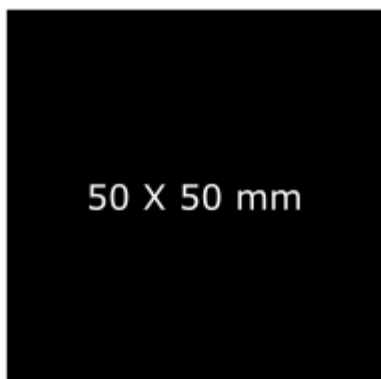


TOP VIEW

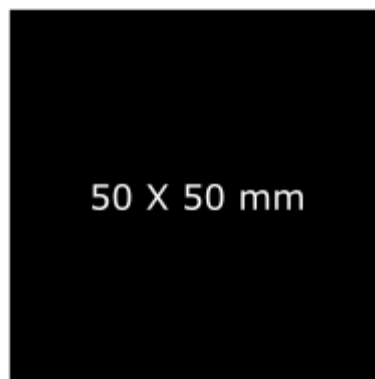


BOTTOM VIEW

Part Locations

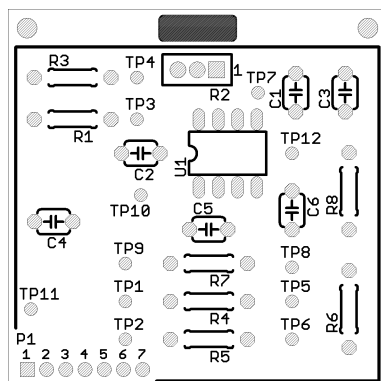


TOP VIEW

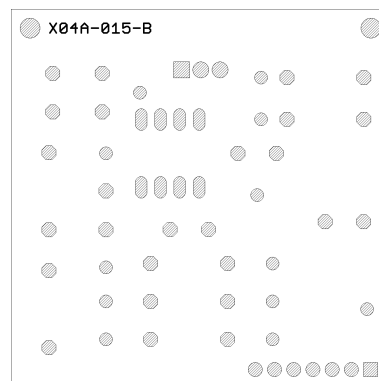

BOTTOM VIEW


Schematic

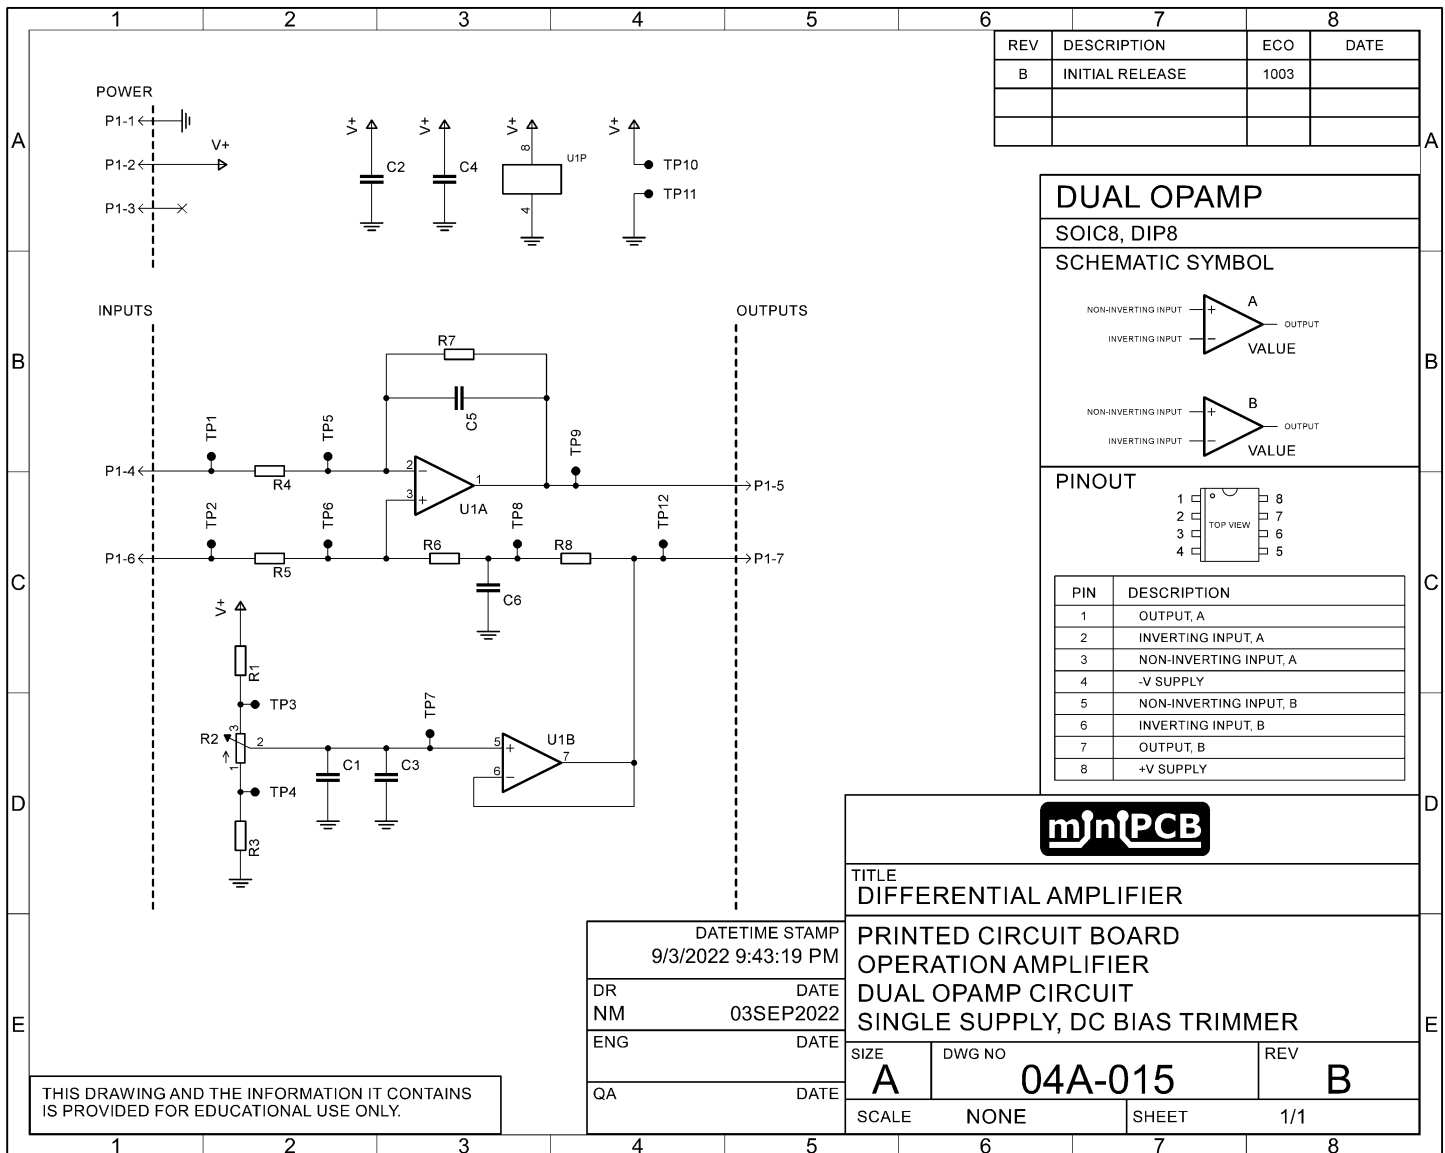


Gerber Files



This section contains images of the layers included in each Gerber file.

TOP COPPER (GLTX)

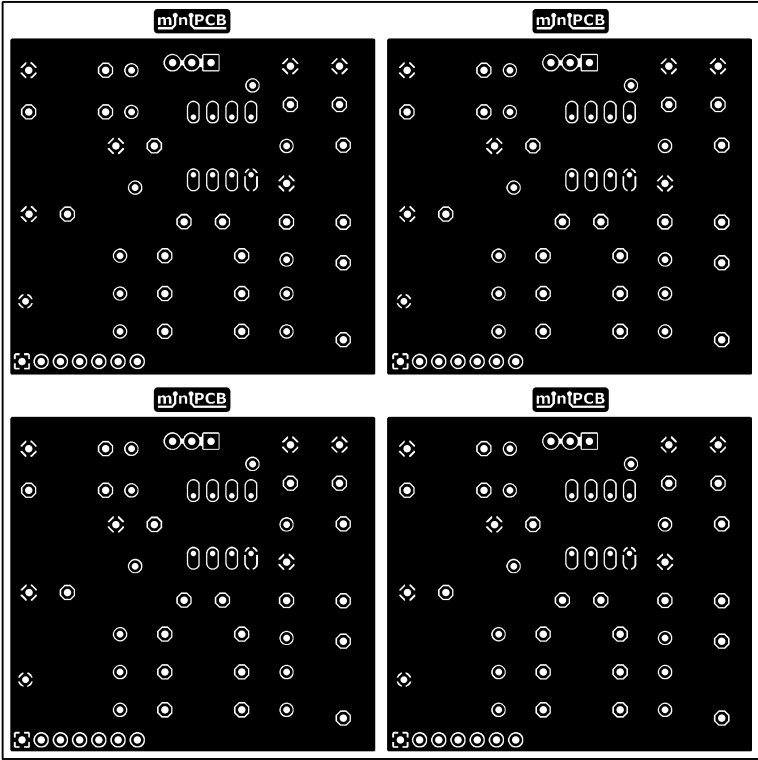


	THIS DRAWING AND THE INFORMATION IT CONTAINS IS PROVIDED FOR EDUCATIONAL USE ONLY.	FILE DESCRIPTION TOP COPPER	
		DWG NO 04A-015-B	FILE EXT GLTX


TOP CREAM (GCTX)

			
	THIS DRAWING AND THE INFORMATION IT CONTAINS IS PROVIDED FOR EDUCATIONAL USE ONLY.	FILE DESCRIPTION TOP CREAM	
		DWG NO 04A-015-B	FILE EXT GCTX

BOTTOM CREAM (GCBX)

<div></div>				
	THIS DRAWING AND THE INFORMATION IT CONTAINS IS PROVIDED FOR EDUCATIONAL USE ONLY.	FILE DESCRIPTION BOTTOM CREAM		
		<table><tr><td>DWG NO</td><td>FILE EXT</td></tr><tr><td>04A-015-B</td><td>GCBX</td></tr></table>	DWG NO	FILE EXT
DWG NO	FILE EXT			
04A-015-B	GCBX			

BOTTOM COPPER (GLBX)

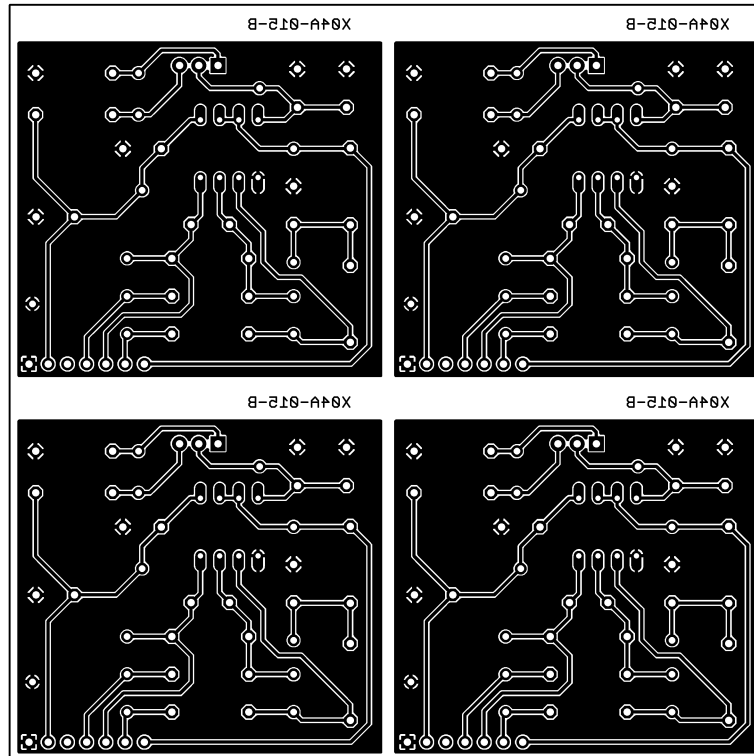

THIS DRAWING AND
THE INFORMATION IT CONTAINS
IS PROVIDED
FOR EDUCATIONAL USE ONLY.

FILE DESCRIPTION

BOTTOM COPPER


DWG NO

04A-015-B

FILE EXT

GLBX

TOP SILKSCREEN (GOTX)

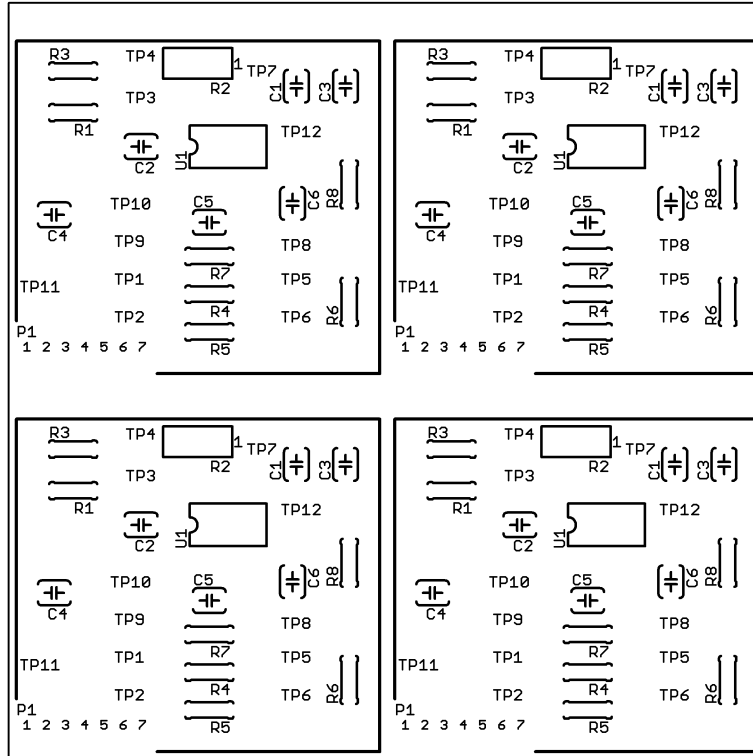

THIS DRAWING AND
THE INFORMATION IT CONTAINS
IS PROVIDED
FOR EDUCATIONAL USE ONLY.

FILE DESCRIPTION

TOP SILKSCREEN


DWG NO

04A-015-B


FILE EXT

GOTX


BOTTOM SILKSCREEN (GOBX)

			THIS DRAWING AND THE INFORMATION IT CONTAINS IS PROVIDED FOR EDUCATIONAL USE ONLY.		FILE DESCRIPTION BOTTOM SILKSCREEN	
					DWG NO 04A-015-B	FILE EXT GOBX

TOP SOLDERMASK (GSTX)

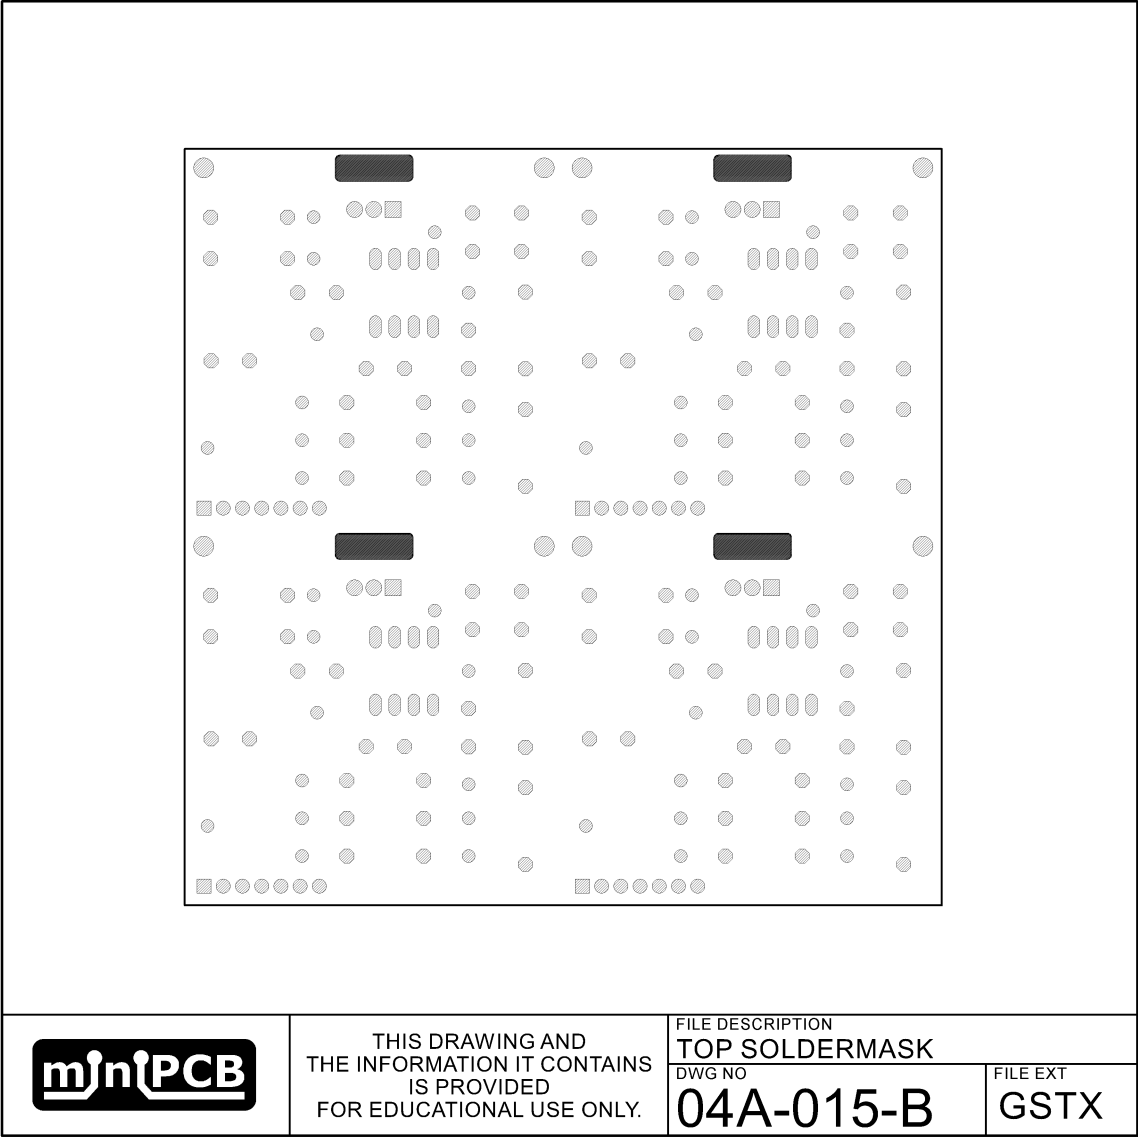

BOTTOM SOLDER MASK (GSBX)

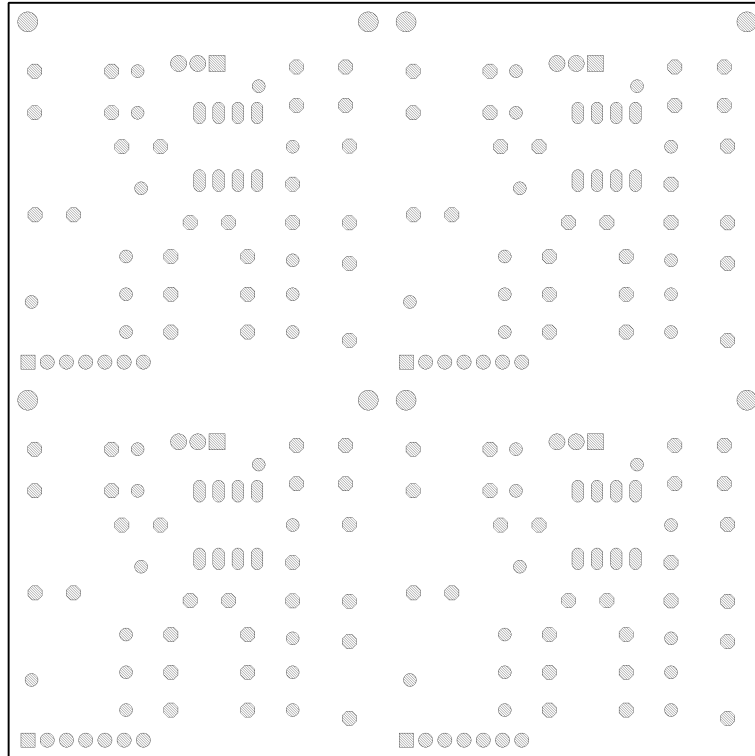

THIS DRAWING AND
THE INFORMATION IT CONTAINS
IS PROVIDED
FOR EDUCATIONAL USE ONLY.

FILE DESCRIPTION

BOTTOM SOLDERMASK


DWG NO

04A-015-B



FILE EXT

GSBX



EDGE (GM1)

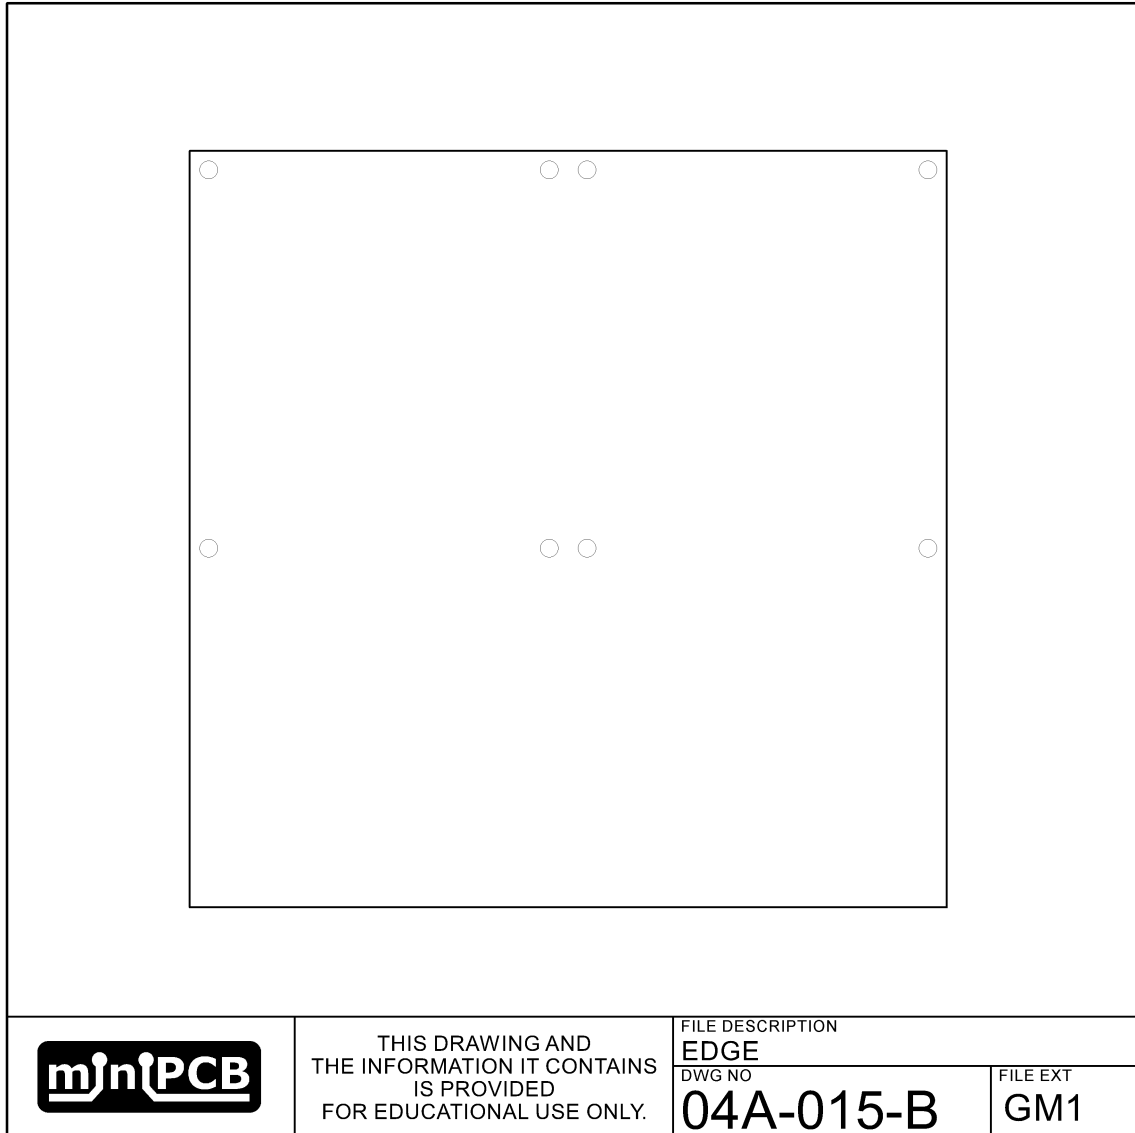

VSCORE (GM2)

		
	THIS DRAWING AND THE INFORMATION IT CONTAINS IS PROVIDED FOR EDUCATIONAL USE ONLY.	FILE DESCRIPTION V-SCORE
		DWG NO 04A-015-B

MILLING (GM3)

		
	<p>THIS DRAWING AND THE INFORMATION IT CONTAINS IS PROVIDED FOR EDUCATIONAL USE ONLY.</p>	FILE DESCRIPTION MILLING
		<table border="1"> <tr> <td> DWG NO 04A-015-B </td> <td> FILE EXT GM3 </td> </tr> </table>
DWG NO 04A-015-B	FILE EXT GM3	

Design Inputs

Design Requirements Form

POWER REQUIREMENTS

PARAMETER NAME	SYMBOL	UNITS	LOWER LIMIT	TARGET VALUE	UPPER LIMIT
Positive DC Supply	+V	V			
Negative DC Supply	-V	V			

STIMULI REQUIREMENTS

PARAMETER NAME	SYMBOL	UNITS	LOWER LIMIT	TARGET VALUE	UPPER LIMIT
Signal Voltage, Peak to Peak	V_s	V			
Signal Frequency	f_s	Hz			
Common Mode	V_{cm}	V			
Source Impedance	R_s	Ω			

PERFORMANCE CHARACTERISTICS

PARAMETER NAME	SYMBOL	UNITS	LOWER LIMIT	TARGET VALUE	UPPER LIMIT
Quiescent Current	I_q	A			
Voltage Gain	A_v	V/V			
Current Gain	A_i	A/A			
Power Gain	A_p	P/P			
Input Impedance	R_i	Ω			
Output Impedance	R_o	Ω			

Design Outputs

Parts List Form

REF DES	PART TYPE	MFG PART NUMBER	PART DESCRIPTION	FIND
				1
				2
				3
				4
				5
				6
				7
				8
				9
				10
				11

Testing Plans

Developmental Testing

1. Plan each calibration and service test.
2. Predict expected values for each test measurement.
3. Determine if expected values satisfy design requirements.
4. Assemble a prototype that is representative of what might be the final design.
5. Perform the calibration and service testing plans.
6. Determine if the design outputs satisfy design requirements.

Calibration and Service Testing

1. With power off, measure resistances between each pin.
2. If measured resistances are not as expected, end testing fail, components need to be replaced.
3. With power on, measure voltages at each pin.
4. If measured voltages are not as expected, end testing fail, components need to be replaced.
5. With power on, adjust potentiometer PX such that the voltage at test point TPX is ##.
6. If measured voltages cannot be adjusted to an expected value, end testing fail, components need to be replaced.
7. With power on, apply stimuli and measure outputs.
8. If measured output signals are not as expected, end testing fail, components need to be replaced.
9. If measured output signals are as expected, end testing pass.-

Design Example

Design Inputs

POWER REQUIREMENTS

PARAMETER NAME	SYMBOL	UNITS	LOWER LIMIT	TARGET VALUE	UPPER LIMIT
Positive DC Supply	+V	V	4.9	5	5.1
Negative DC Supply	-V	V			

STIMULI REQUIREMENTS

PARAMETER NAME	SYMBOL	UNITS	LOWER LIMIT	TARGET VALUE	UPPER LIMIT
Signal Voltage, Peak to Peak	V_s	V	0.015	0.02	0.025
Signal Frequency	f_s	Hz			
Common Mode	V_{cm}	V			
Source Impedance	R_s	Ω			

PERFORMANCE CHARACTERISTICS

PARAMETER NAME	SYMBOL	UNITS	LOWER LIMIT	TARGET VALUE	UPPER LIMIT
Quiescent Current	I_q	A			
Voltage Gain	A_v	V/V			
Current Gain	A_i	A/A			
Power Gain	A_p	P/P			
Input Impedance	R_i	Ω			
Output Impedance	R_o	Ω			

Design Outputs

PARTS LIST

QTY REQ	REFERENCE DESIGNATORS	MFG PART NUMBER	PART DESCRIPTION	FIND
3	R1, R2, R5		RESISTOR, 1.5K, 1/4W, 1%	1
2	R3, R4		100	2
1	Q1		2N2222	3
1	C1		10u	4
1	C2		1u	5
1	C3		0.1u	6

Developmental Tests per Example

Test Report per Example

Change and Liability Notice

This document is subject to change without notice. While effort has been made to ensure the accuracy of the material contained within this document, Nolan Manteufel shall under no circumstances be liable for incidental or consequential damages or related expenses resulting from the use of this document.

Trademark Notice

miniPCB is a trademark of Nolan Manteufel.

This datasheet does not constitute permission to use the miniPCB trademark.

WORDMARK	FIGUREMARK	FIGUREMARK
miniPCB™		

Revision History

REV	DESCRIPTION	ECO	DATE
A	Initial Release		