1. MINLA HDW pinout functional description.
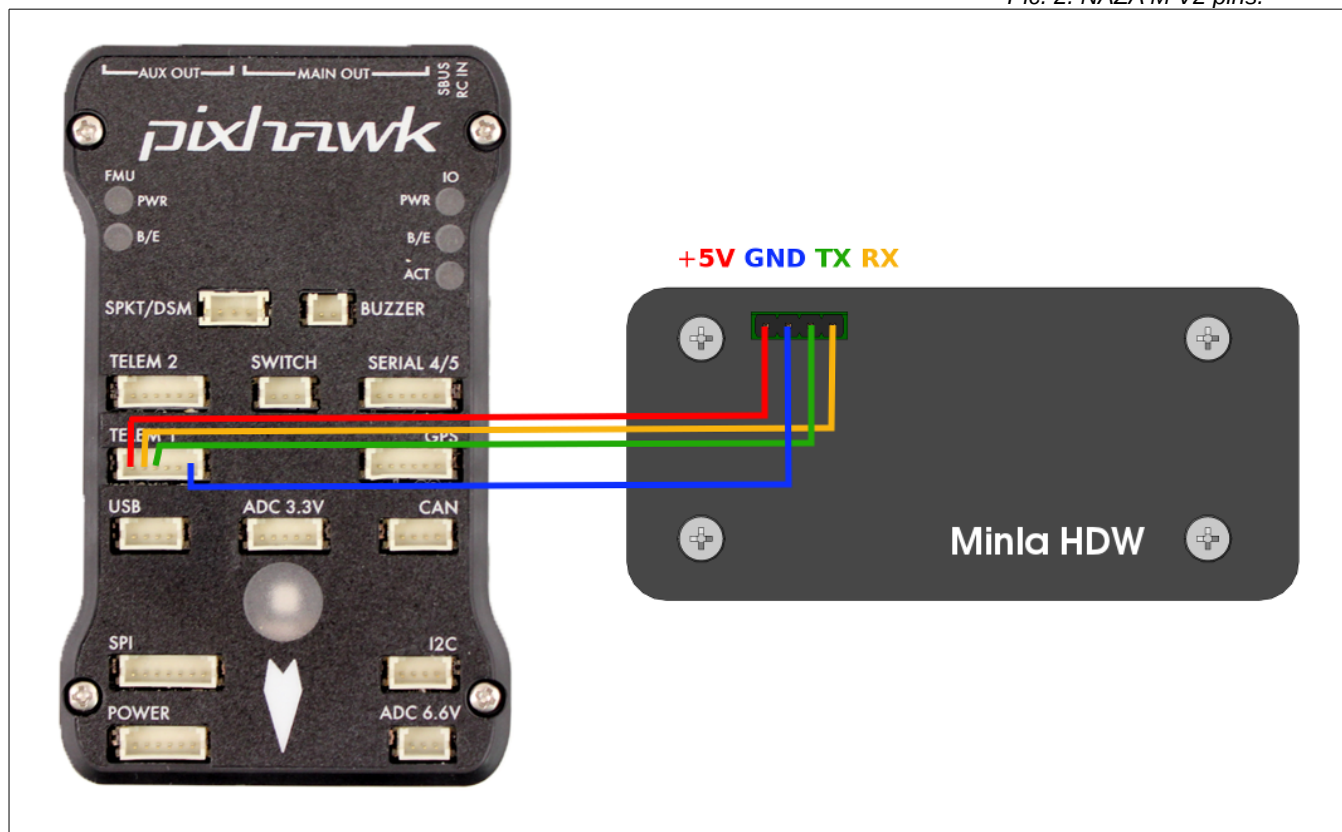
Pic 1. Minla HDW pins.
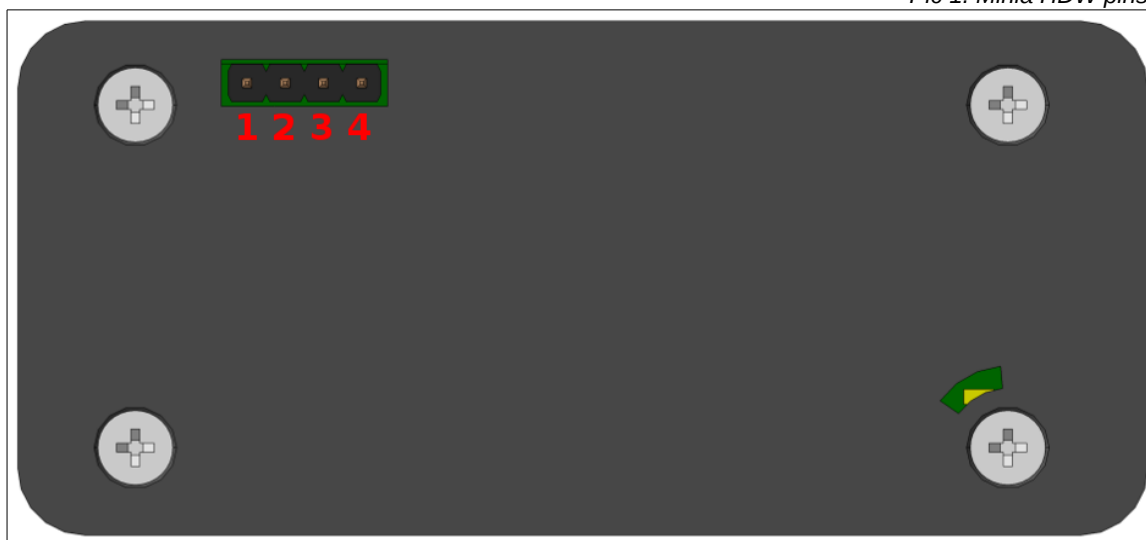
Pin number	Function
1	+5V (Power input). *Recommended supply current ~ 650 mA.*
2	GND
3	Serial TX. Default baud rate 57600.
4	Serial RX. Default baud rate 57600.

2. Minla HDW to Pixhawk connection scheme.

Pic. 2. NAZA M V2 pins.

3. Minla HDW WiFi settings.

Minla HDW by default tries to connect to WiFi hotspot with following settings:

Network name	minla
Password	minlaremote
WiFi security	WPA & WPA2 Personal