


1. MINLA HDW pinout functional description.


Pic 1. Minla HDW pins.

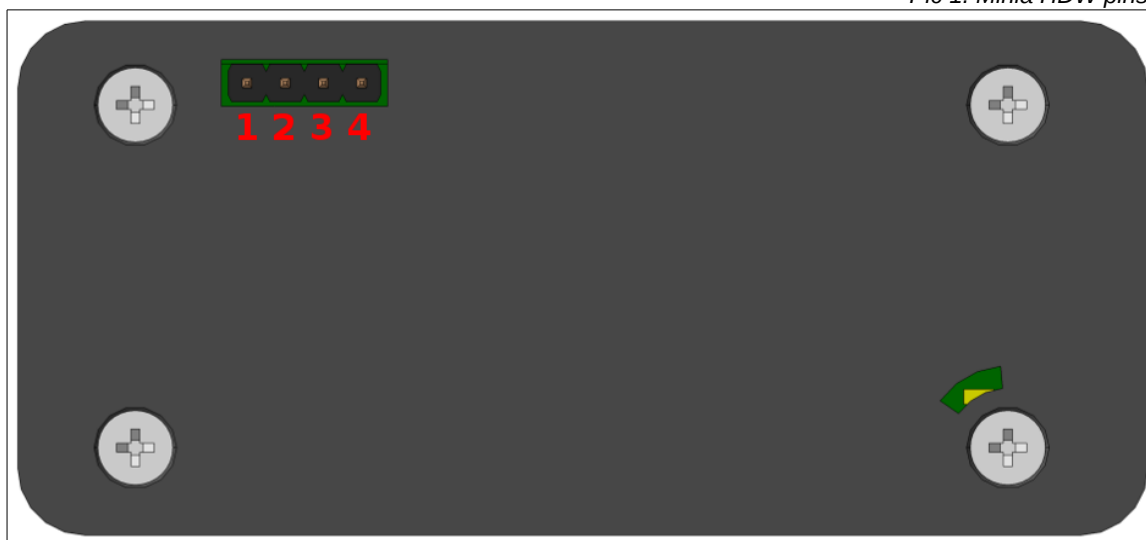

Pin number	Function
1	+5V (Power input). Recommended supply current ~ 650 mA.
2	GND
3	Serial TX. Default baud rate 57600.
4	Serial RX. Default baud rate 57600.

2. Minla HDW to Pixhawk connection scheme.

Pic. 2. Minla HDW - Pixhawk connection.

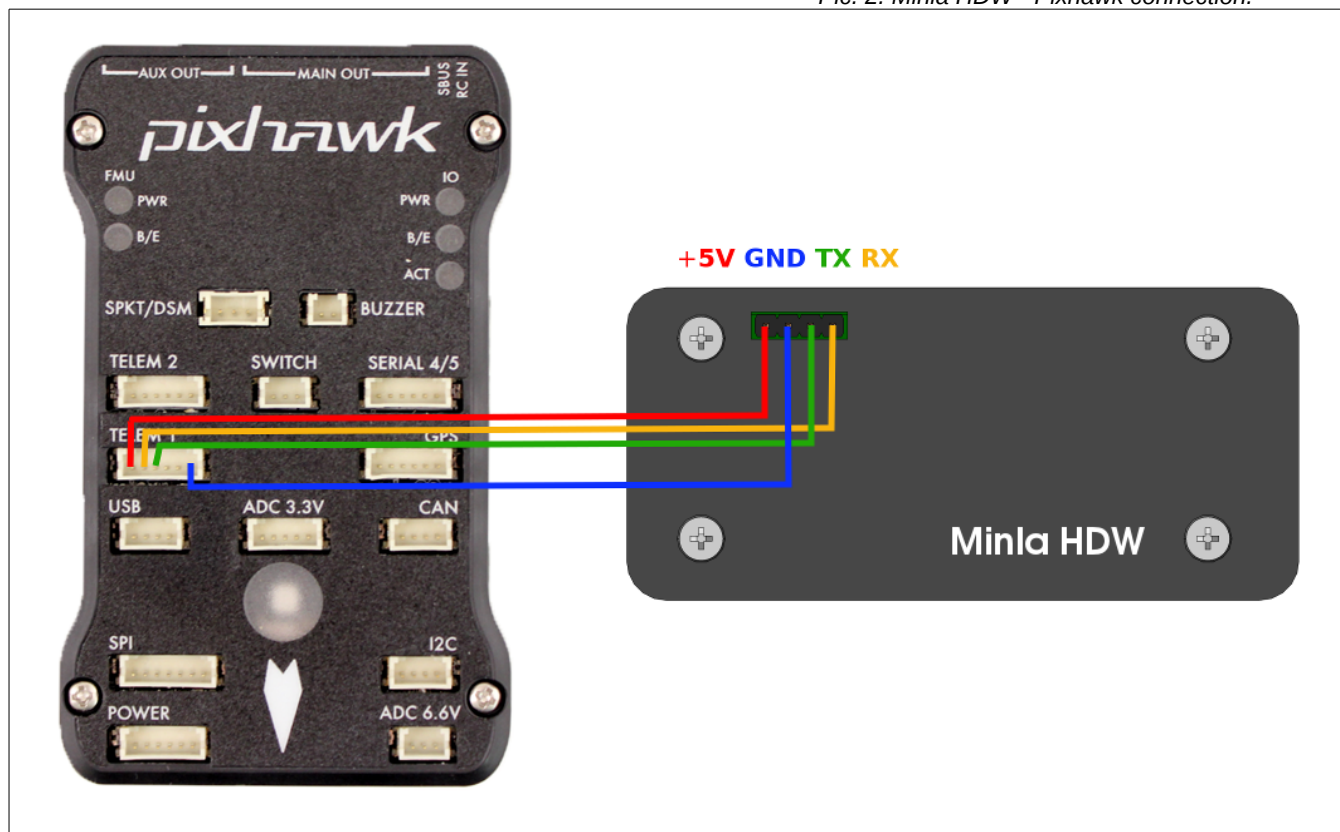

3. Minla HDW WiFi settings.

Minla HDW by default tries to connect to WiFi hotspot with following settings:

Network name	minla
Password	minlaremove
WiFi security	WPA & WPA2 Personal