

Optimizing High-Product-Mix Manufacturing with Advanced Process Control through Machine Learning-Based Virtual Metrology

Hyung Joo Lee
Calibre Semi Manufacturing
Siemens EDA
Seongnam, Republic of Korea
hyungjoo.lee@siemens.com

Sanghyun Choi
Calibre Semi R&D
Siemens EDA
Seongnam, Republic of Korea
sh.choi@siemens.com

Nathan Greeneltch
Calibre Semi Manufacturing
Siemens EDA
Wilsonville, USA
nathan.greeneltch@siemens.com

Srividya Jayaram
Calibre Semi Manufacturing
Siemens EDA
Fremont, USA
srividya.jayaram@siemens.com

Abstract— The semiconductor foundry encounters challenges in addressing multifaceted customer requirements and complicated manufacturing procedures. Variations within the chemical vapor deposition (CVD) process directly impact transistor characteristics and overall yield. Advanced machine learning (ML) software gives rise to an extended virtual metrology (VM) model enhanced by design feature and real-time fault detection and classification (FDC) data. Through the integration of an advanced process control (APC) system, the manufacturing process effectively mitigates film thickness variations within high-product-mix foundry fabs. This remarkable outcome is validated through control simulations.

Keywords—machine learning, virtual metrology, design features, high product mix manufacturing, advanced process control

I. INTRODUCTION

A. High-product-mix manufacturing

In recent times, the semiconductor foundry industry has undergone noteworthy evolutions, particularly marked by the ascendancy of high-product-mix manufacturing. The paradigm shift towards customized product designs underscores the imperative for adaptability in the manufacturing process. This trend is conspicuous across major technology entities, ranging from industry giants such as Apple, Microsoft, Google, and Amazon to nascent startups, all endeavoring to procure bespoke chip designs tailored for diverse applications, notably in the realm of artificial intelligence (AI).

Effectively overseeing the simultaneous production of diverse products within the fabrication facility poses formidable challenges, encompassing a multitude of chambers, intricate process steps, and variances in designs and technology nodes. The intricacies of this multifaceted scenario are clearly illustrated in Fig. 1. Consequently, there exists a pressing need to formulate robust strategies for the governance of high-product-mix manufacturing. The absence of control in this dynamic environment holds the potential to precipitate diminished yields and escalated operational costs. This necessitates a proactive approach to devise and implement effective management strategies for the complex landscape of high-product-mix manufacturing within the semiconductor foundry industry.

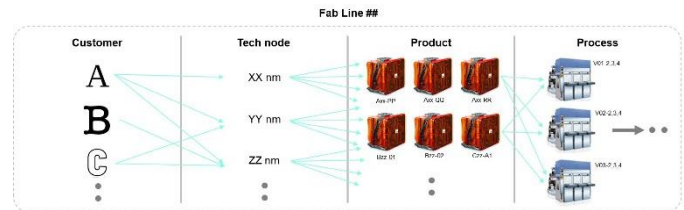


Fig. 1. High-product-mix manufacturing within semiconductor foundry

B. Chemical vapor deposition process challenges

In the context of high-product-mix manufacturing, the chemical vapor deposition (CVD) processes, involving the deposition of a solid material onto the substrate from a gaseous phase through surface reactions, encounter formidable challenges characterized by variations in deposition thickness attributed to both the design layout of devices and the conditions within CVD process chambers. As highlighted in Fig. 2(a), the irregularities in film thickness between single and double pitches are distinctly evident [1]. Moreover, Fig. 2(b) presents transmission electron microscopy (TEM) images that effectively illustrate variations in silicon nitride film thickness between patterns of wide and narrow widths [2]. Extending beyond the spatial dimensions between line patterns, numerous other design features have the potential to contribute to variations in film thickness [3].

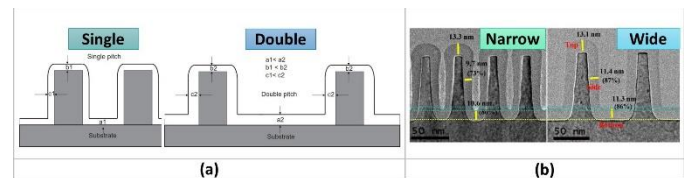


Fig. 2. (a) Schematic of the difference in film thickness between single and double pitches, (b) TEM images of film thickness differences between patterns of wide and narrow widths

The absence of precise control over thickness across a diverse array of layout designs, coupled with resultant film variability, has the potential to significantly influence critical transistor parameters such as threshold voltage and overlap

capacitance. This, in turn, can ultimately lead to the undesirable consequence of yield loss [1].

Fig. 3 illustrates the drift in the CVD film growth rate during a preventive maintenance (PM) cycle and the chamber-to-chamber variances observed at various stages of the PM cycle. It is important to clarify that the PM cycle refers to the entire process cycle between PMs. These variations arise from the reduction in surface area and the consumption of reactive gas on the inner wall of the CVD chamber, a consequence of the accumulated by-product polymer build-up [4]. Given the inevitability of employing multiple chambers, attending to chamber-by-chamber variation emerges as a primary focus. Successfully addressing time-series variation throughout the PM cycle and attaining chamber matching within the CVD process are critical endeavors to mitigate potential throughput loss [4].

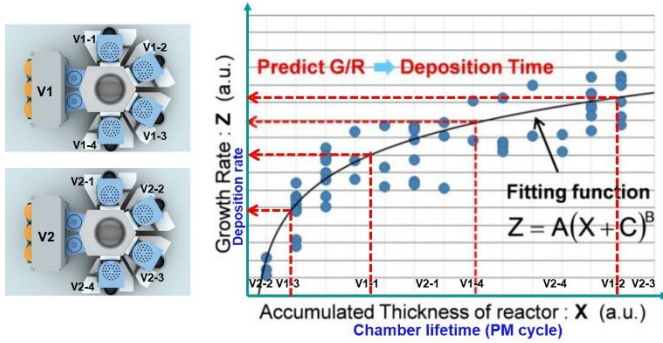


Fig. 3. CVD film growth rate drifts during PM cycle and variations between chamber-to-chamber

The variability in CVD film thickness arises from a combination of design features and chamber characteristics, presenting a challenge for control through run-to-run (R2R) advanced process control (APC) methods. Simultaneously managing numerous new product introductions (NPI) within a single day introduces an additional layer of complexity. This paper proposes a machine learning (ML)-based virtual metrology (VM) approach as an innovative solution for effective process control in high-product-mix fabrication facilities (fabs). The efficacy of this approach is exemplified within the context of CVD process control through simulated scenarios.

II. METHODOLOGY

A. Extended VM

In an ideal scenario, achieving precise control would involve monitoring each wafer for process control. However, this requirement introduces additional metrology, resulting in extended processing times and escalated overall costs. To address this challenge, the concept of VM has been formulated. Conventional VM relies on data from the process chamber, known as fault detection and classification (FDC), to predict metrology results. These predictions can then be seamlessly integrated into the process control system, particularly in the context of R2R control [5].

Within this paper, the extraction and application of design features, such as pattern density and perimeter, for predictive purposes across varied layouts and technologies are emphasized.

This proposition gains particular significance in the domain of high-product-mix manufacturing, as described in the extended VM model, illustrated in Fig. 4. The feature extraction process is efficiently executed through the utilization of an electronic design automation (EDA) software. Originally introduced for layout design optimization, specifically in hotspot detection, this feature extraction process leverages spatial relations of layout patterns, thereby extracting valuable characteristics from complex layouts associated with specific products.

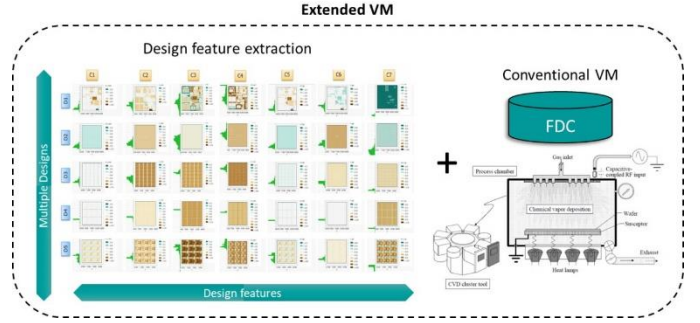


Fig. 4. Extended VM model

B. Modeling by advanced machine learning

The integration of these design features into FDC data at the chamber level is facilitated through the utilization of advanced ML software [6-10]. This methodology employs sophisticated ML techniques, including a modified gradient boosted tree algorithm, to construct the extended VM model, as depicted in Fig. 5. The process begins with Shapley analysis to select a subset of input features (e.g., the top N important features) for training, aiming to prevent the model from overfitting. Subsequently, using OPTUNA's hyperparameter optimization, a light gradient-boosting machine (LightGBM) model is trained based on the best set of hyperparameters. This multi-step approach culminates in the final extended VM model. LightGBM, a decision tree model, is selected for its notable speed compared to GBM or extreme gradient boosting (XGBoost) and its low memory requirements during training on large datasets, making it ideal for fab applications. In the realm of ML modeling, the tuning of hyperparameters is crucial for both performance and efficiency. OPTUNA significantly aids in enhancing the tuning process by employing a Bayesian optimization approach.

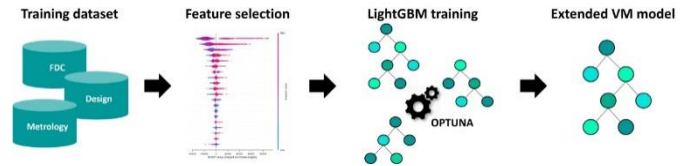


Fig. 5. ML flow for the extended VM modeling

The modeling dataset is sourced from a high-volume foundry fab, encompassing three distinct technology nodes and encompassing 70 unique products processed across 15 CVD chambers. These chambers are configured within 5 equipment units, each equipped with 3 chambers. In the model training phase, 70% of the dataset is utilized, leaving the remaining 30% for subsequent model testing.

In Fig. 6, the outcomes of the VM modeling are presented. The X-axis and Y-axis delineate the actual and predicted thickness, respectively, on the graph. Specific thickness targets for each node are omitted due to confidentiality constraints. Each color on the graph corresponds to a chamber, while the shape indicates the product. Model fitness is evaluated using the R^2 metric. The extended VM model, incorporating both design features and FDC, demonstrates significantly improved performance. A comparative analysis with the conventional VM model, which excludes design features, highlights superior outcomes with the inclusion of design data. Additionally, a VM model relying solely on design features is deemed impractical.

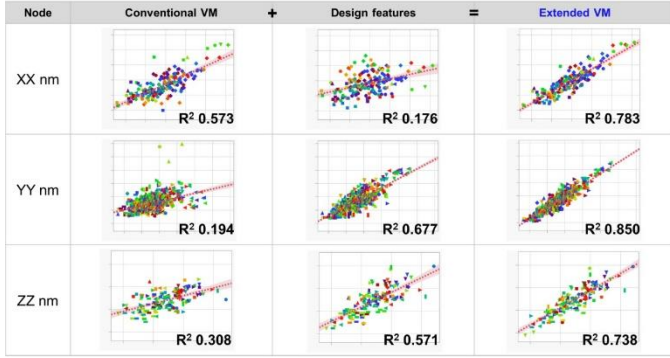


Fig. 6. The outcomes of VM modeling

In Fig. 7, a detailed analysis by product is presented, focusing on the root mean square error (RMSE) of the VM model with and without design features. Conversely, Fig. 8 provides an in-depth examination by chamber, assessing the RMSE of the VM model with and without FDC. Across a majority of the segmented cases, the extended VM model, incorporating both design features and FDC data, consistently shows significantly improved performance.

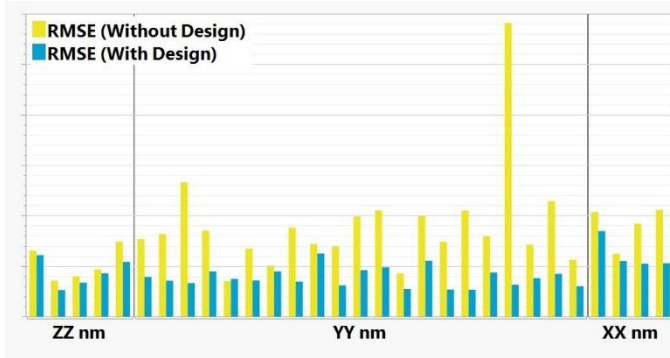


Fig. 7. RMSE comparison of the VM model with and without design features by product

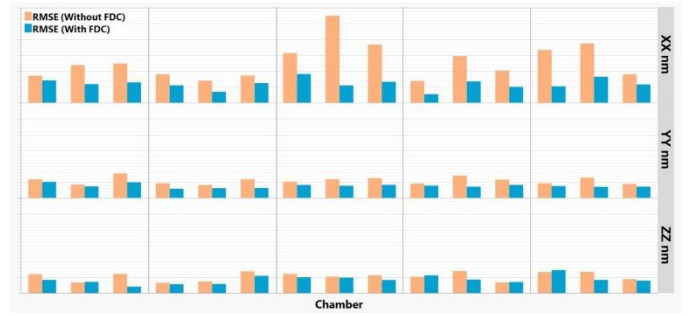


Fig. 8. RMSE comparison of the VM model with and without FDC by chamber

III. RESULTS

A. Proposed APC system

Fig. 9 presents the conceptual framework of the proposed APC system, strategically utilizing the extended VM model for R2R control. This innovative system integrates crucial components, including design features, FDC, and real-time measurements to precisely attain the targeted thickness. Notably, in instances where the deviation between the actual and predicted thickness, known as the prediction error, exceeds predefined specifications, an automatic update mechanism is triggered for the extended VM model. This update process seamlessly incorporates additional data within a predefined time window, ensuring the adaptability and accuracy of the model in response to dynamic manufacturing conditions.

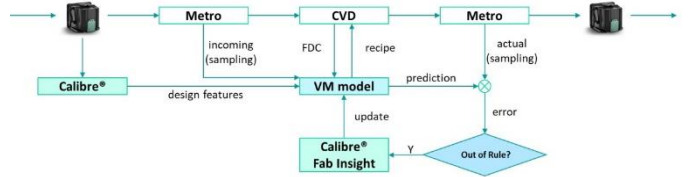


Fig. 9. The conceptual framework of the proposed APC system, utilizing the extended VM model for R2R control

B. Control simulation

Fig. 10 provides a comprehensive representation of the results derived from the time-series evaluation of the proposed APC system through precise control simulation. Significantly, the process capability (Cpk) experiences a noteworthy enhancement, surging from 0.86 to an impressive 1.30. The proposed APC system, in its operational effectiveness, systematically mitigates variations inherent in the R2R deposition film thickness. This strategic intervention by the APC system results in the successful attainment of the desired target thickness, orchestrated through seamless updates to both the extended VM model and the CVD process recipe.

It is imperative to emphasize that the focus of the control simulation is primarily directed towards a singular technology node (YY nm) owing to constraints associated with the dataset's limited size. Despite this limitation, the APC system adeptly handles and processes multiple products across a spectrum of diverse chambers, showcasing its applicability and efficacy in real-world manufacturing scenarios.

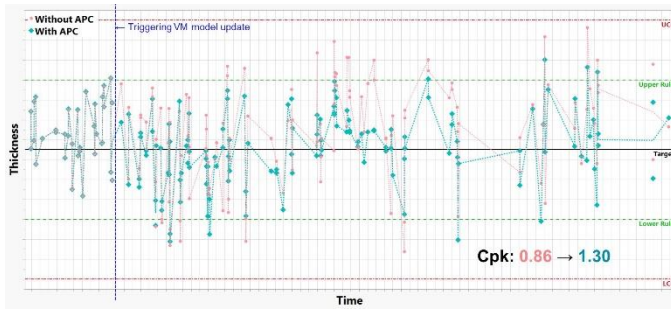


Fig. 10. Time-series evaluation of the proposed APC system through precise control simulation

Fig. 11 provides a visual representation of the observed reduction in thickness variation on a chamber-by-chamber basis. Despite the successful integration of the APC system, discernible residual chamber-to-chamber variations persist. To effectively address this challenge, one potential solution involves the establishment of dedicated VM models tailored for each individual chamber. This approach strategically tackles sensor-to-sensor variations and accommodates the distinctive characteristics inherent to each chamber's operational dynamics within the semiconductor manufacturing process.

An alternative way for refinement lies in the exploration of more efficient R2R feedback actions, presenting an opportunity for further improvement in the overall control and precision of the manufacturing process. This underscores the importance of ongoing research endeavors and benchmarking exercises to delineate and refine strategies for future advancements in this dynamic and evolving domain.

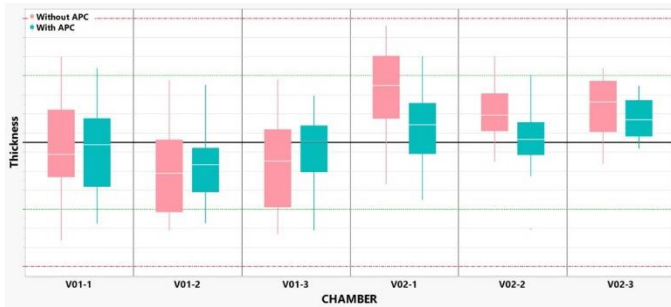


Fig. 11. Thickness variation comparison between with and without APC by chamber through control simulation

Upon contrasting the insights from Fig. 11, it is evident that the incorporation of design features assumes a pivotal role in mitigating product variations, as underscored by the delineations in Fig. 12. This observation emphasizes the significance of integrating the APC system with the extended VM model within the operational framework of the CVD process, especially within a high-product-mix foundry fab characterized by the presence of multiple equipment units.

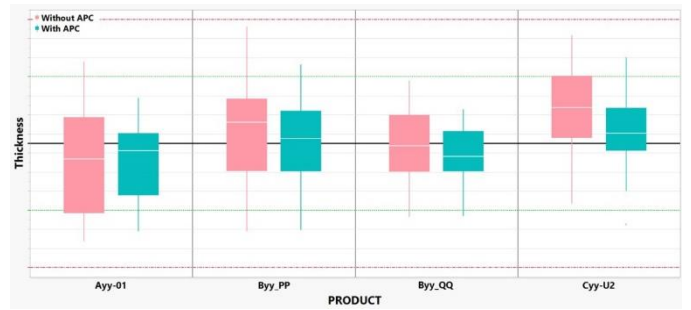


Fig. 12. Thickness variation comparison between with and without APC by product through control simulation

IV. CONCLUSION

In response to the increasing requirement for customized products across a diverse customer base, there arises a heightened necessity for adaptability in manufacturing. Our proposition entails the incorporation of a ML-based extended VM model, enriched by the inclusion of design features and FDC, into the APC system, serving as a resilient process control solution meticulously designed for the complications of high-product-mix manufacturing. Validation of this proposed solution through simulation results distinctly underscores its exceptional efficacy, particularly within the context of the CVD process, and more specifically, within the operational domain of a high-product-mix foundry fab.

REFERENCES

- [1] M. Belyansky, Thin film deposition for front end of line: the effect of the semiconductor scaling, strain engineering and pattern effects, Handbook of Thin Film Deposition, 4th ed., K. Seshan, and D. Schepis, Eds., Kidlington, Oxford: William Andrew, Elsevier, 2018.
- [2] H. Cho, et al., "Remote Plasma Atomic Layer Deposition of SiNx Using Cyclosilazane and H₂/N₂ Plasma" Applied Sciences, vol. 9, no. 17, pp. 3531-3541, 2019.
- [3] N. Greeneltch, et al., "Design-aware virtual metrology and process recipe recommendation", Proceedings of SPIE vol. 12495, DTCO and Computational Patterning II, pp. 1-6, February 2023.
- [4] M. Ueda, K. Nakamura, T. Sato, and T. Itani, "Improvement of Thickness variation and Productivity in LP-CVD process by APC system," Proceedings of AEC/APC Symposium Asia, pp. 1-2, November 2015.
- [5] Y. Xie, and R. Stearrett, "Machine learning based CVD virtual metrology in mass produced semiconductor process," unpublished.
- [6] H. Lee, et al., "Reliability Prediction for Automotive 5nm and 7nm Technology node by using Machine Learning based Solution," Proceedings of 7th IEEE Electron Devices Technology & Manufacturing Conference (EDTM), pp. 1-3, March 2023.
- [7] D. Kim, et al., "AI-guided reliability diagnosis for 5,7nm automotive process," Proceedings of SPIE vol. 12496, Metrology, Inspection, and Process Control XXXVII, pp. 1-7, February 2023.
- [8] S. Jayaram, et al., "Automotive Process Reliability Prediction for 5,7nm using ML," Proceedings of 34th Annual SEMI Advanced Semiconductor Manufacturing Conference (ASMC), pp. 1-5, May 2023.
- [9] H. Lee, S. Choi, N. Greeneltch, S. Jayaram, "Machine Learning Based Virtual Metrology for Effective Process Control in High Product Mix Manufacturing," Proceedings of APCSM, pp. 1-7, October 2023.
- [10] H. Lee, S. Choi, N. Greeneltch, S. Jayaram, "Machine Learning Based Virtual Metrology for Effective Process Control in High Product Mix Manufacturing," Proceedings of AEC/APC Symposium Asia, pp. 1-2, November 2023.