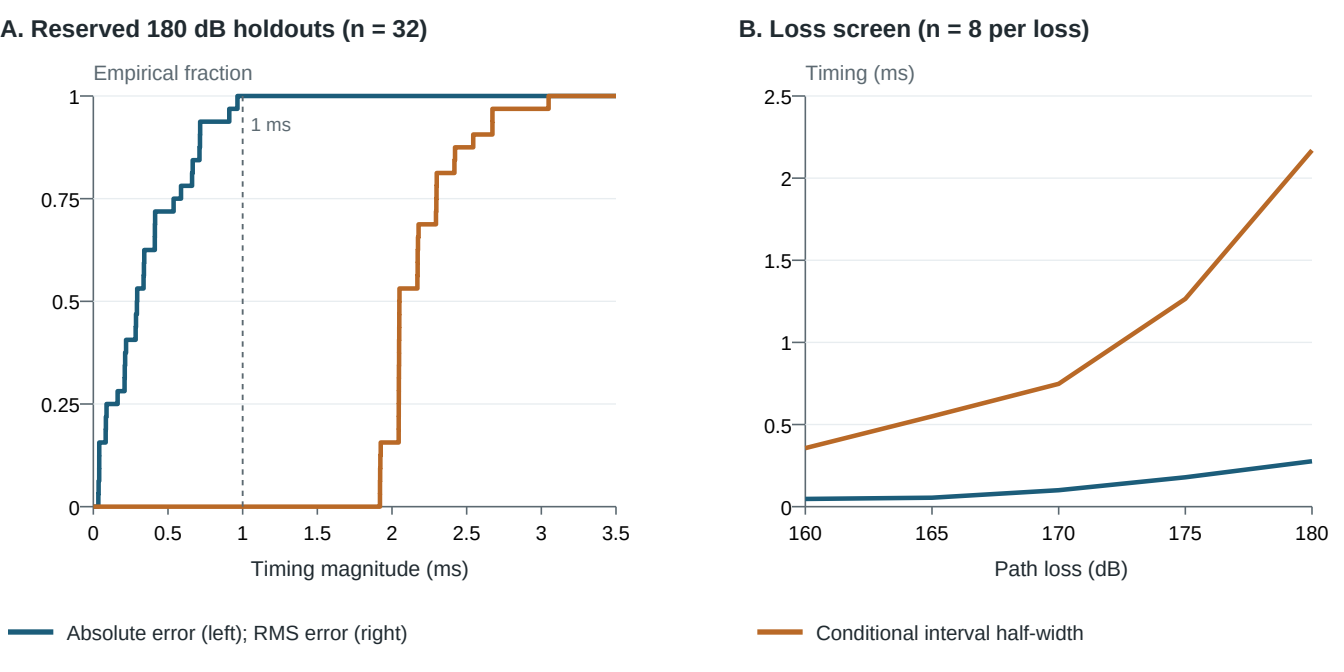
A. Reserved 180 dB holdouts (n = 32)
Empirical fraction
1
0.75
0.5
0.25
0
1 ms
0
0.5
1
1.5
2
2.5
3
3.5
Timing magnitude (ms)
B. Loss screen (n = 8 per loss)
Timing (ms)
2.5
2
1.5
1
0.5
0
160
165
170
175
180
Path loss (dB)
Absolute error (left); RMS error (right)
Conditional interval half-width