

Quantum Transport

Mirco Tollardo, Jacopo Goldoni, Simone Casalino

a.y 2025-2026

- 1 Theoretical framework
- 2 Computing the transmission coefficient
- 3 Density of states
- 4 Transmittance spectrum
- 5 Bound states
- 6 Application of an electric field
- 7 Carrier Velocity

The 1D stationary Schrödinger equation

$$\left[-\frac{\hbar^2}{2m_e} \frac{\partial^2}{\partial z^2} + U(z) \right] \psi(z) = E \psi(z)$$

- $U(z)$ is piecewise-constant (alternating well and barrier layers); m_e is the effective mass under the parabolic-band approximation.
- In each layer the solution is a superposition of progressive and regressive plane waves $A e^{+ik_z z} + B e^{-ik_z z}$ with $k_z = \sqrt{2m_e(E - U)/\hbar^2}$.

Quantum mechanics $\leftrightarrow$ transmission-line analogy

Quantum mechanics	Transmission line
Wavefunction $\psi(z)$	Voltage $V(z)$
Probability current $J(z)$	Active power $\frac{1}{2} \text{Re}\{VI^*\}$
$\sqrt{2m_e(E - U)/\hbar^2}$	Wavenumber k_z
$\sqrt{8(E - U)/m_e}$	Characteristic admittance Y_∞

- Transmittance, LDOS and bound states are obtained from the local reflection coefficients $\overleftarrow{\Gamma}(z)$, $\overrightarrow{\Gamma}(z)$ rather than from transfer matrices.

Computing the transmission coefficient

Single barrier

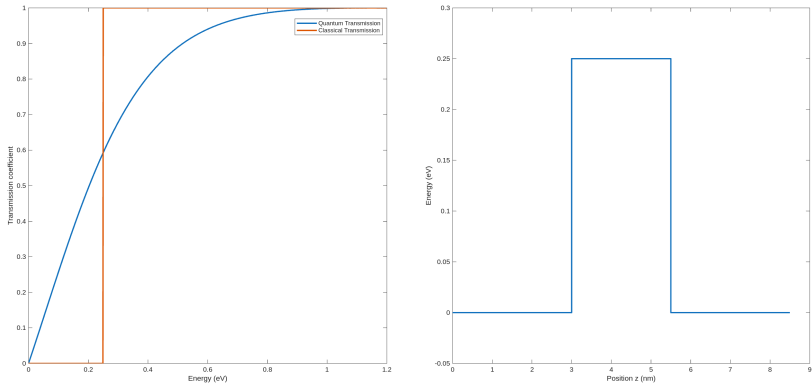


Figure: Quantum transmission coefficient $T(E)$ of a single rectangular barrier compared with the classical step prediction, showing sub-barrier tunnelling and the characteristic over-barrier oscillations.

$$U_{barr} = 0.25 \text{ eV}, t_{well} = 3 \text{ nm}, t_{barr} = 2.5 \text{ nm}$$

Computing the transmission coefficient

Thin barrier

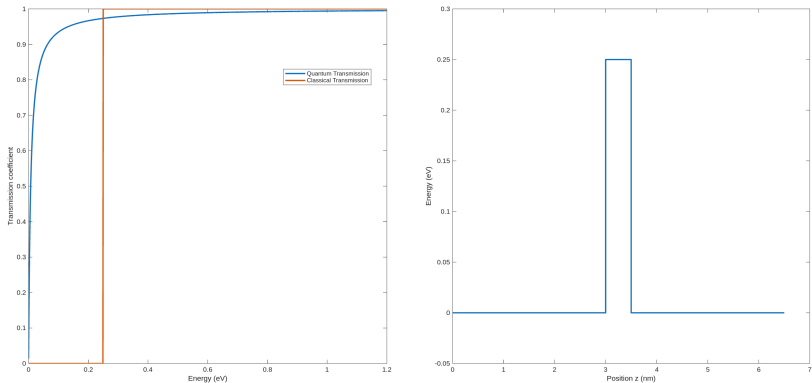


Figure: Transmission coefficient of a thin barrier

$$t_{barr} = 0.5 \text{ nm}$$

Computing the transmission coefficient

Thick barrier

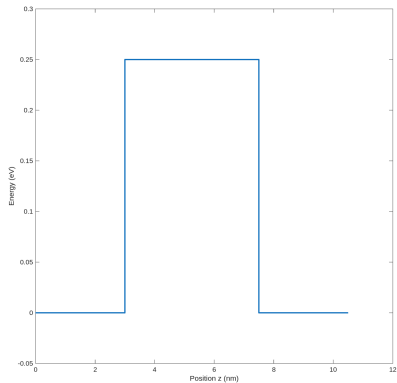
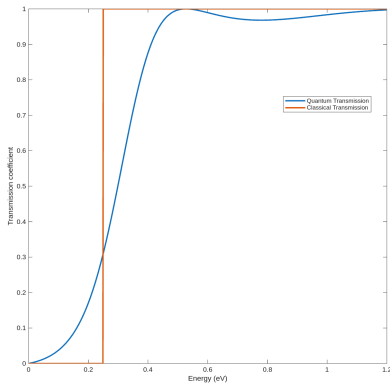


Figure: Transmission coefficient of a thick barrier

$$t_{barr} = 4.5 \text{ nm}$$

Computing the transmission coefficient

Higher barrier

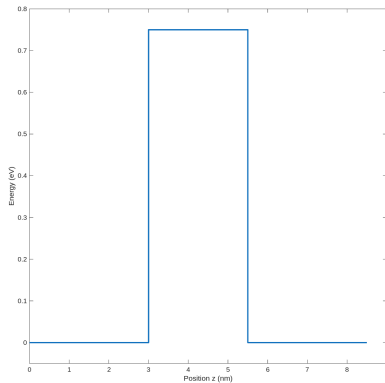
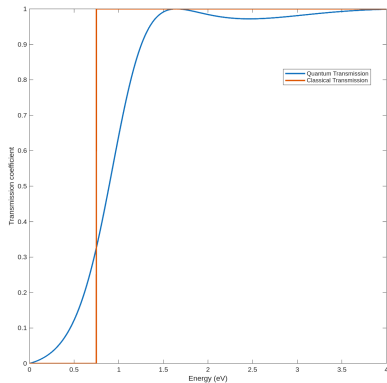


Figure: Transmission coefficient of a higher barrier

$$U_{barr} = 0.75 \text{ eV}$$

Computing the Local Density of States

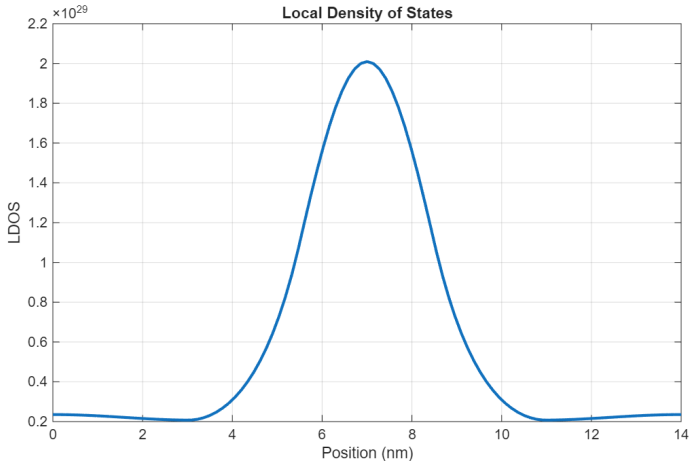


Figure: Local density of states along the growth direction of a double-barrier resonant structure at an energy lying inside the well, evidencing the standing-wave pattern of the quasi-bound state.

Transmittance spectrum

Single barrier

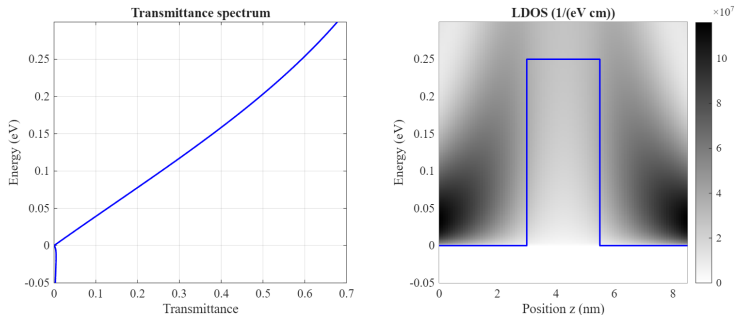


Figure: Transmittance spectrum (left) and energy-resolved LDOS map (right) for a single barrier: smooth tunnelling tail below U_{barr} and Ramsauer-like oscillations above.

$$U_{\text{barr}} = 0.25 \text{ eV}, t_{\text{barr}} = 2.5 \text{ nm}$$

Transmittance spectrum

Double barrier

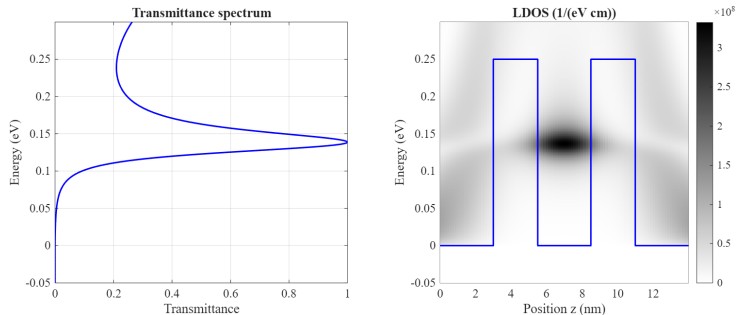


Figure: Transmittance and LDOS for a symmetric double-barrier structure, with the sharp resonant peak corresponding to the quasi-bound state localised in the central well.

$$U_{barr} = 0.25 \text{ eV}, t_{barr} = 2.5 \text{ nm}, t_{well} = 3 \text{ nm}$$

Transmittance spectrum

Double barrier

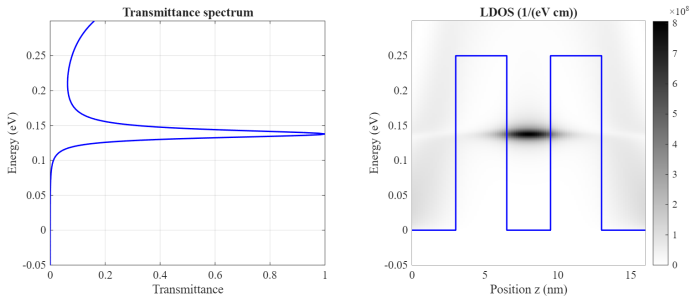


Figure: Double barrier with increased barrier thickness

$$U_{barr} = 0.25 \text{ eV}, t_{barr} = 3.5 \text{ nm}, t_{well} = 3 \text{ nm}$$

Transmittance spectrum

Double barrier

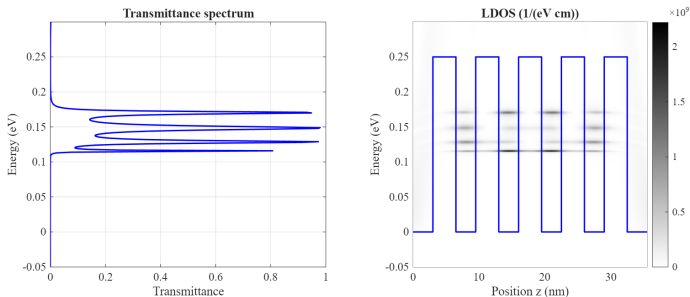


Figure: Same conditions, 5 barriers: the single resonance splits into a miniband of 5 closely spaced resonances.

$$U_{barr} = 0.25 \text{ eV}, t_{barr} = 3.5 \text{ nm}, t_{well} = 3 \text{ nm}$$

Transmittance spectrum

20 barriers

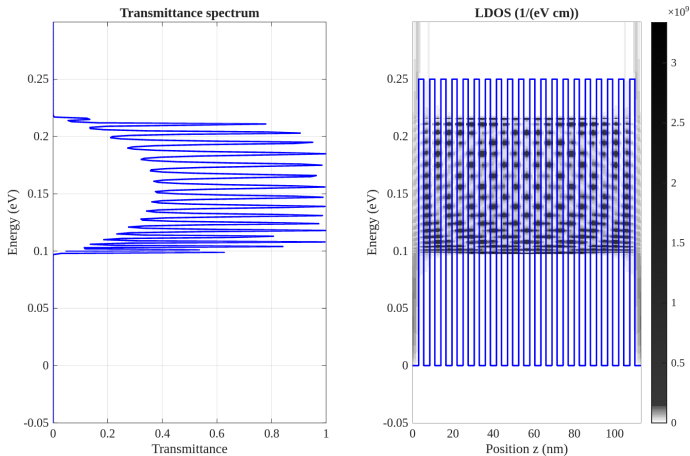


Figure: Transmittance and LDOS for a 20-period superlattice: the discrete resonances of the few-barrier case merge into allowed minibands separated by minigaps.

Computing Bound States

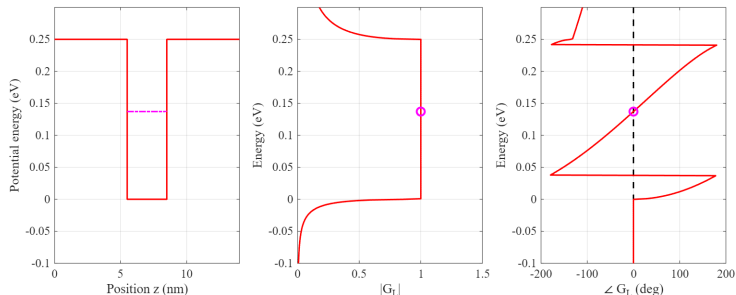


Figure: Bound-state search by the loop-gain method: potential profile (left), $|G_L(E)|$ (centre) and $\angle G_L(E)$ (right); the magenta marker locates the bound-state energy found by a phase-zero crossing.

$$U_{barr} = 0.25 \text{ eV}, t_{well} = 3 \text{ nm}$$

Bound states

Comparison with LDOS calculation

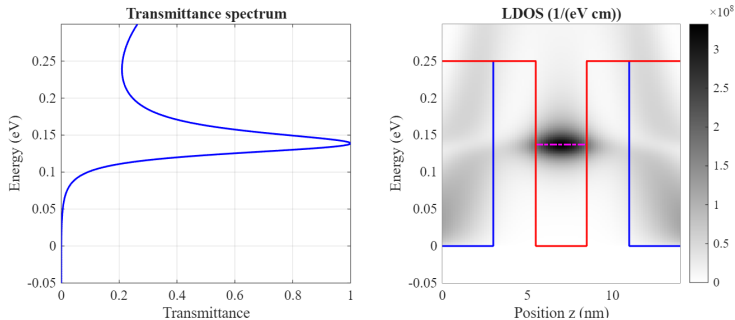


Figure: Comparison of the bound-state energy found by the loop-gain method with the LDOS map

$$U_{barr} = 0.25 \text{ eV}, t_{barr} = 2.5 \text{ nm}, t_{well} = 3 \text{ nm}$$

Transmittance spectrum

No electric field

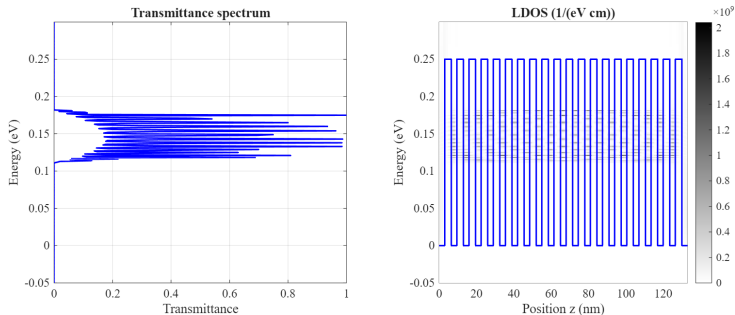


Figure: Transmittance spectrum (left) and LDOS map (right) for an unbiased 20-period superlattice ($t_{\text{barr}} = 3.5$ nm), showing flat minibands extending uniformly across the device.

$$U_{\text{barr}} = 0.25 \text{ eV}, t_{\text{barr}} = 3.5 \text{ nm}, t_{\text{well}} = 3 \text{ nm}$$

Transmittance spectrum

No electric field

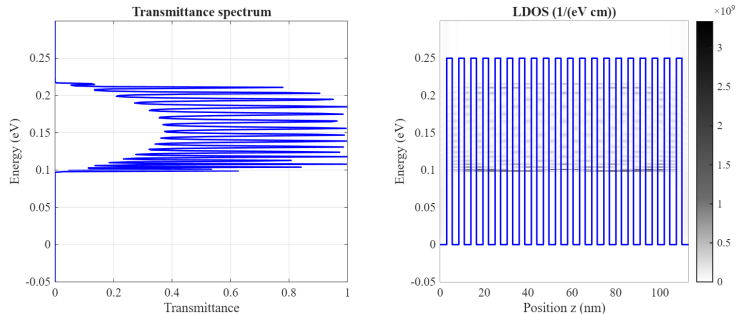


Figure: Same conditions, but with wider barriers ($t_{\text{barr}} = 5$ nm)

$$U_{\text{barr}} = 0.25 \text{ eV}, t_{\text{barr}} = 5 \text{ nm}, t_{\text{well}} = 3 \text{ nm}$$

Transmittance spectrum with Electric field

Voltage applied: 0.025 V

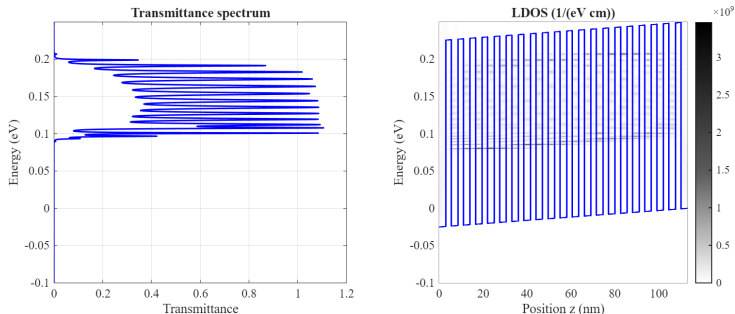


Figure: Same quantities for a 20-period superlattice ($t_{\text{barr}} = 2.5$ nm) under an applied bias of $V = 0.025$ V: the linear potential drop tilts the minibands and breaks the resonant alignment between adjacent wells (note that t_{barr} differs from the unbiased case in the previous slide, so the comparison is qualitative).

$$U_{\text{barr}} = 0.25 \text{ eV}, t_{\text{barr}} = 2.5 \text{ nm}, t_{\text{well}} = 3 \text{ nm}$$

Transmittance spectrum with Electric field

Voltage applied: 0.05 V

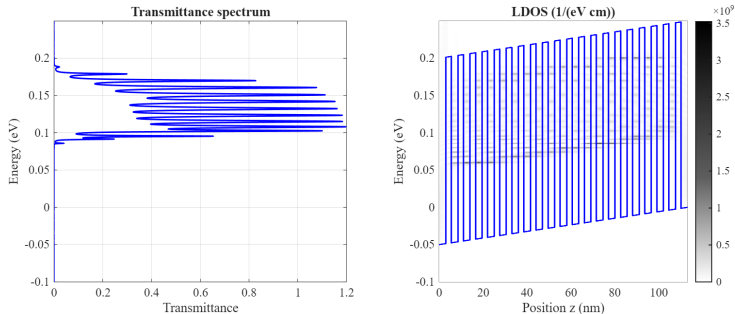


Figure: Same lattice ($t_{\text{barr}} = 2.5$ nm) under an applied bias of $V = 0.05$ V.

$$U_{\text{barr}} = 0.25 \text{ eV}, t_{\text{barr}} = 2.5 \text{ nm}, t_{\text{well}} = 3 \text{ nm}$$

Transmittance spectrum with Electric field

Voltage applied: 0.075 V

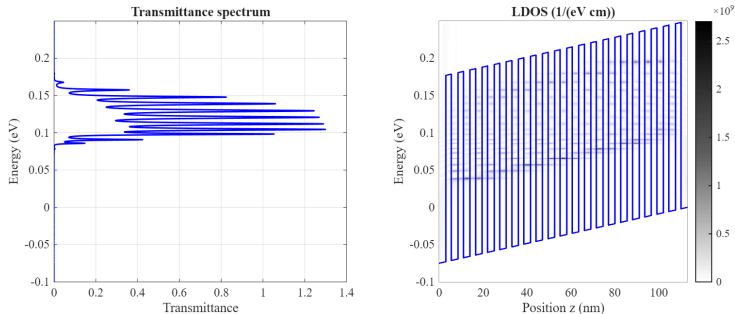


Figure: Same lattice under an applied bias of $V = 0.075$ V.

$$U_{barr} = 0.25 \text{ eV}, t_{barr} = 2.5 \text{ nm}, t_{well} = 3 \text{ nm}$$

Carrier Velocity

Varying barrier thickness

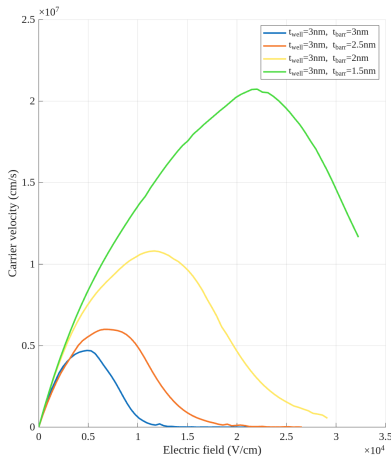


Figure: Carrier velocity as a function of energy for different barrier thicknesses.

Carrier Velocity

Varying well thickness

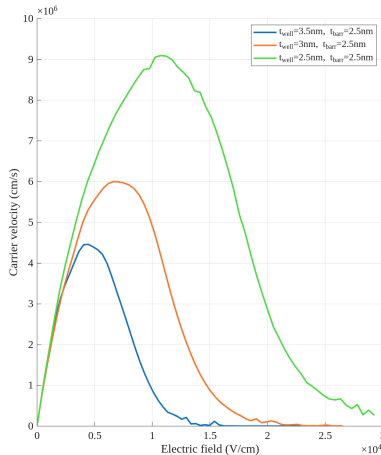


Figure: Carrier velocity as a function of energy for different well thicknesses.