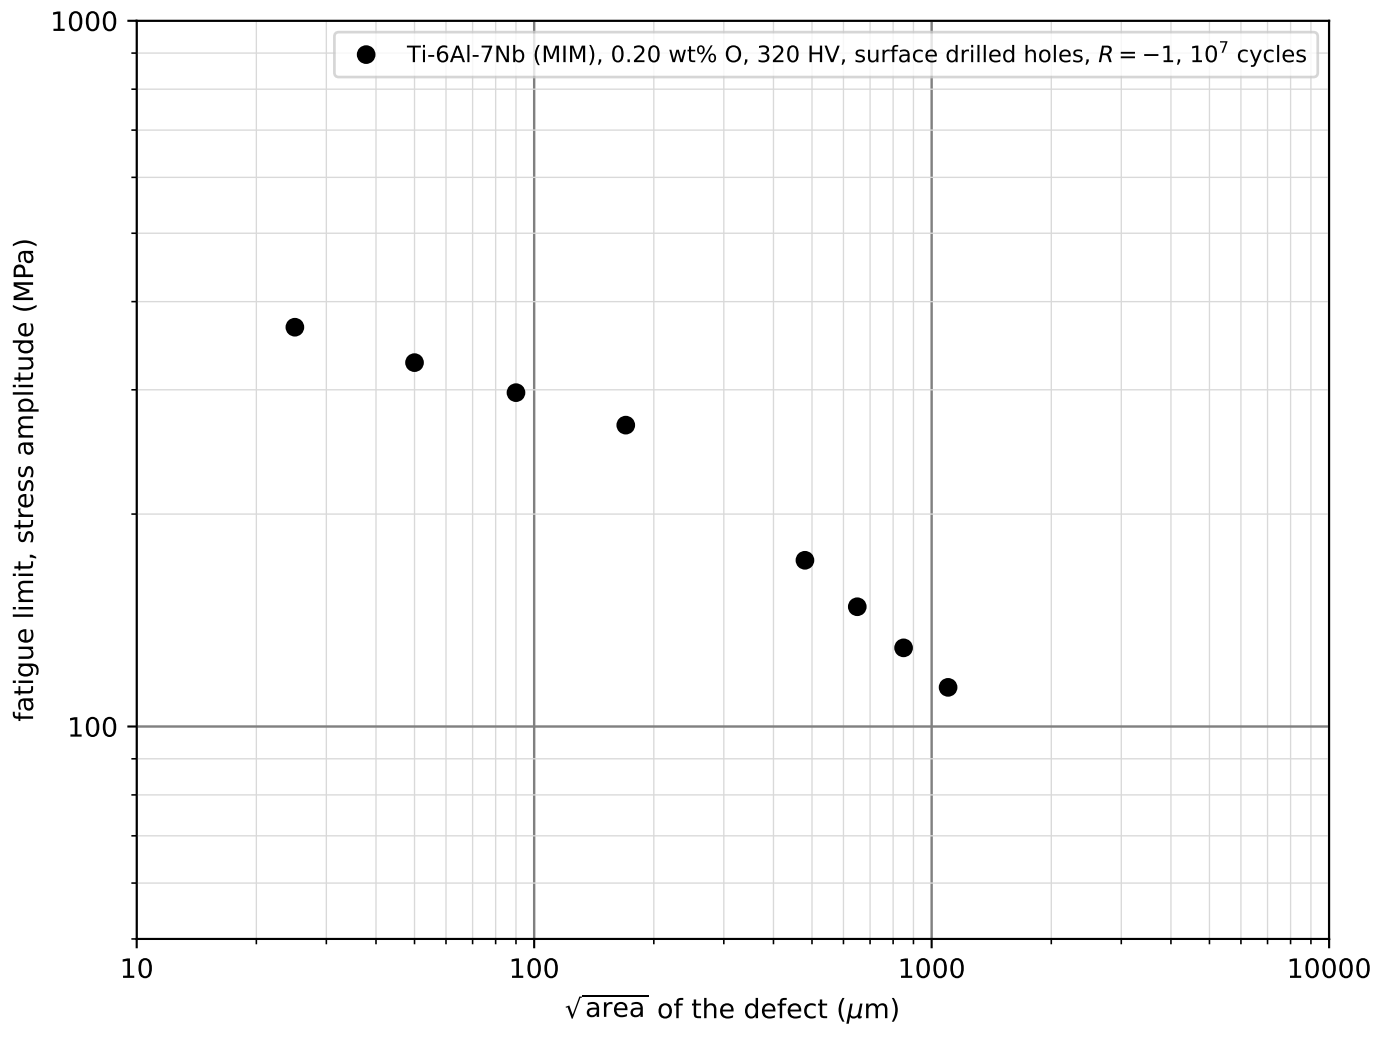
Ti-6Al-7Nb (MIM), 0.20 wt% O, 320 HV, surface drilled holes, $R = -1$, 10^7 cycles
fatigue limit, stress amplitude (MPa)
1000
100
10
100
1000
10000
$\sqrt{\text{area}}$ of the defect (μm)