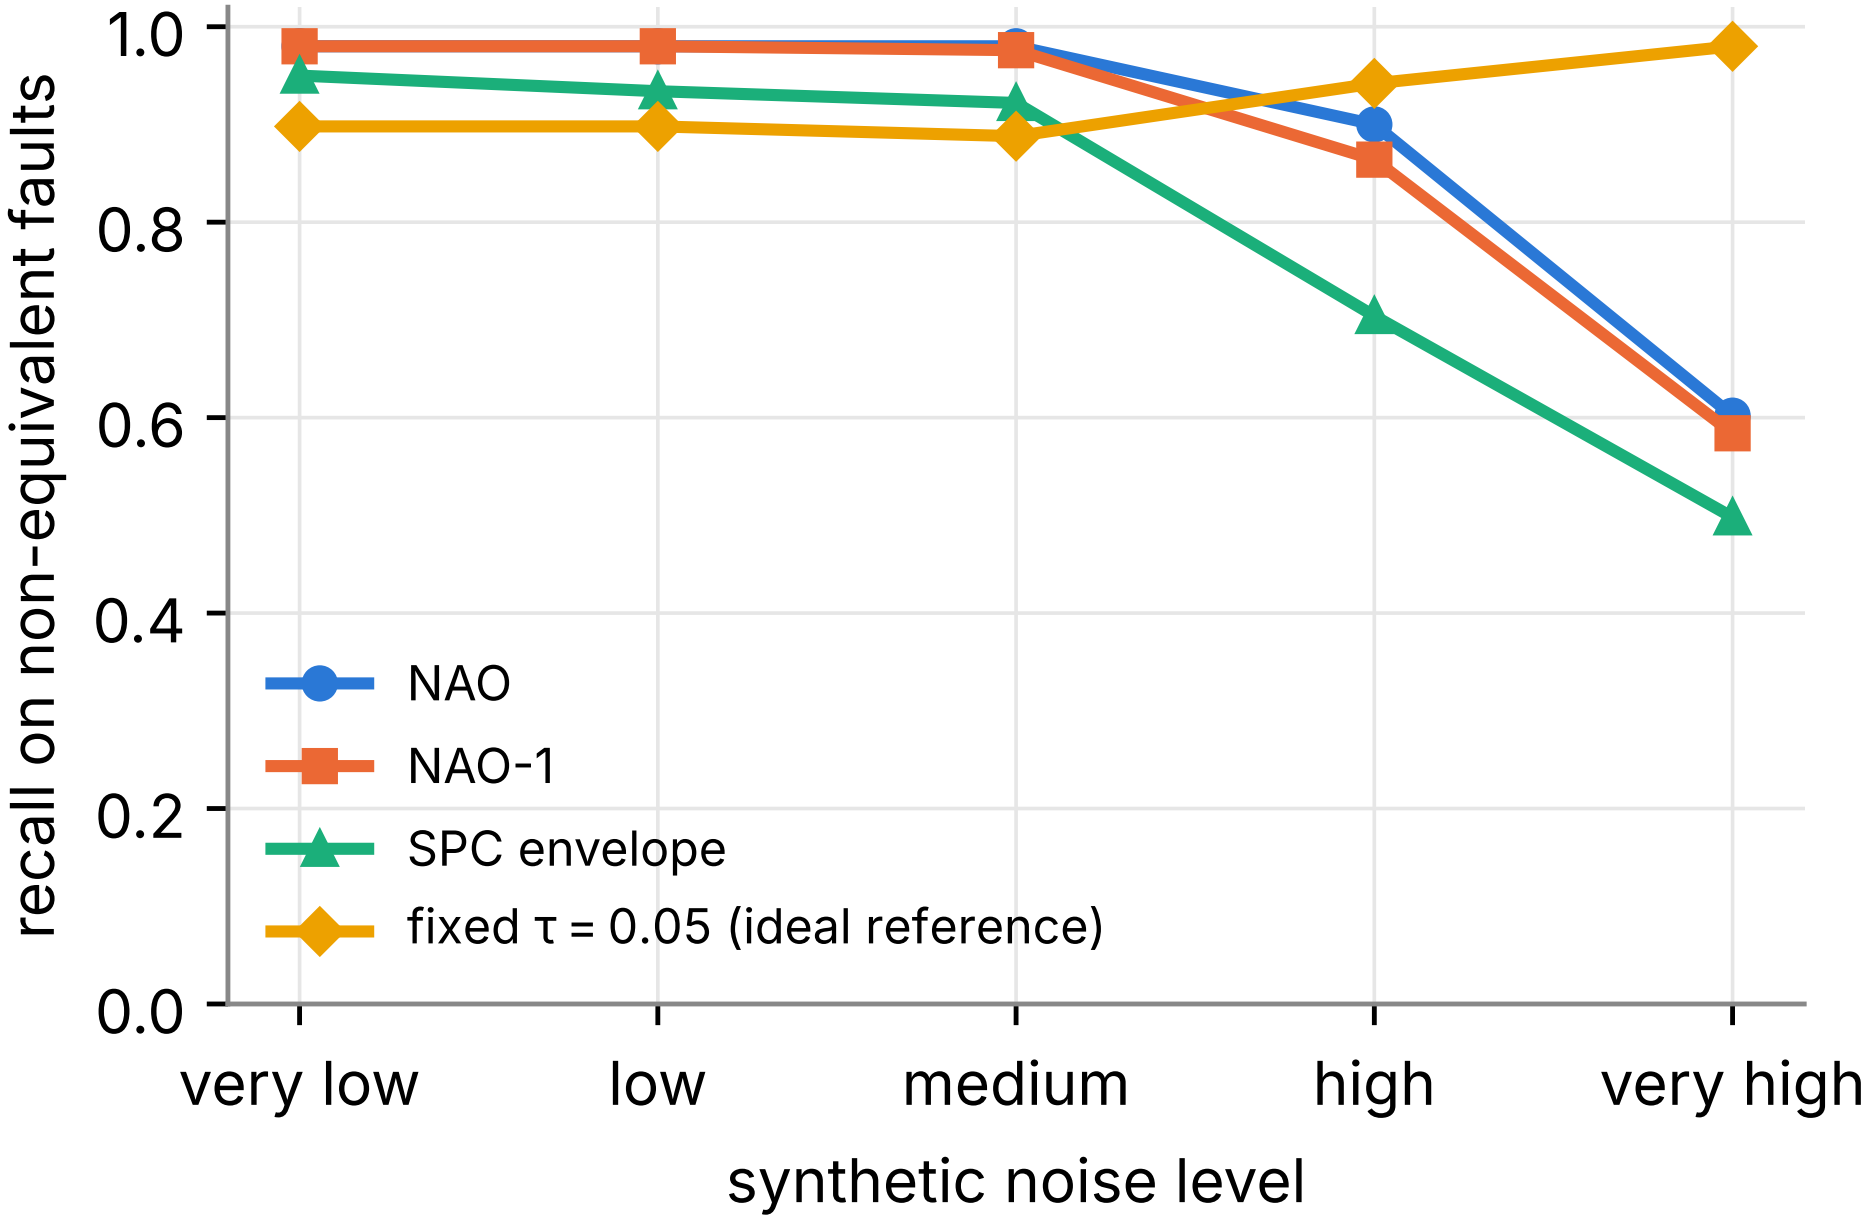
recall on non-equivalent faults
1.0
0.8
0.6
0.4
0.2
0.0
NAO
NAO-1
SPC envelope
fixed τ = 0.05 (ideal reference)
very low
low
medium
high
very high
synthetic noise level