



Scalability and resource overhead (N = 6, 12, 24; 3 seeds each)


System CPU utilisation

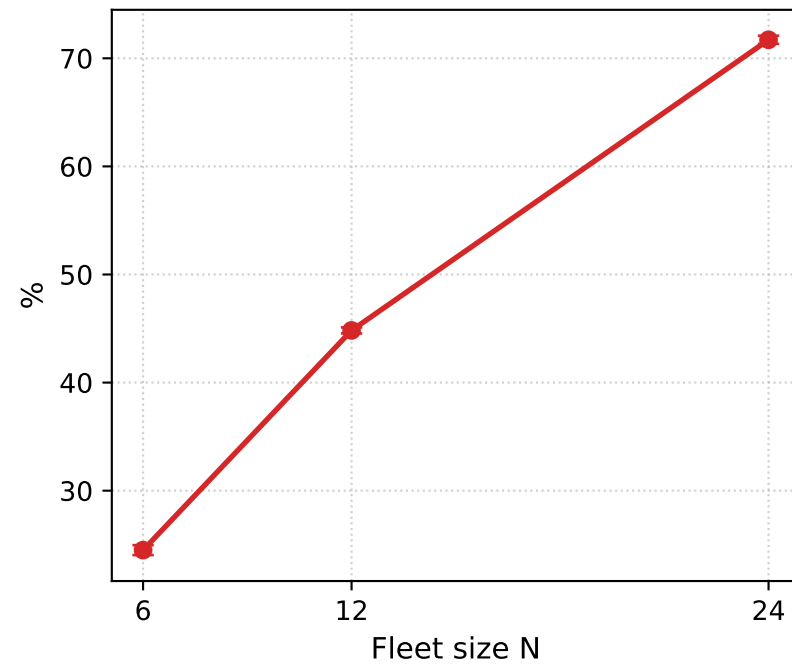


System memory utilisation

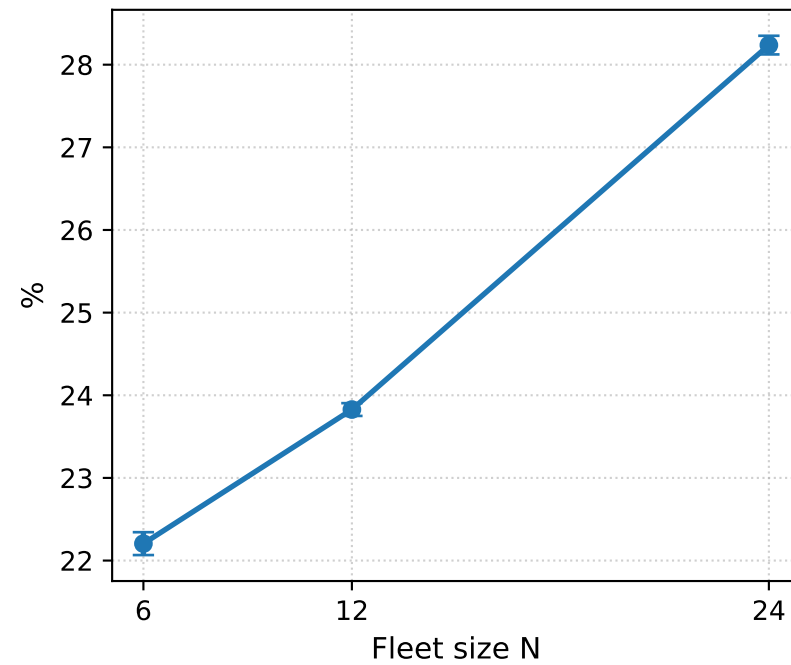


Real-time factor

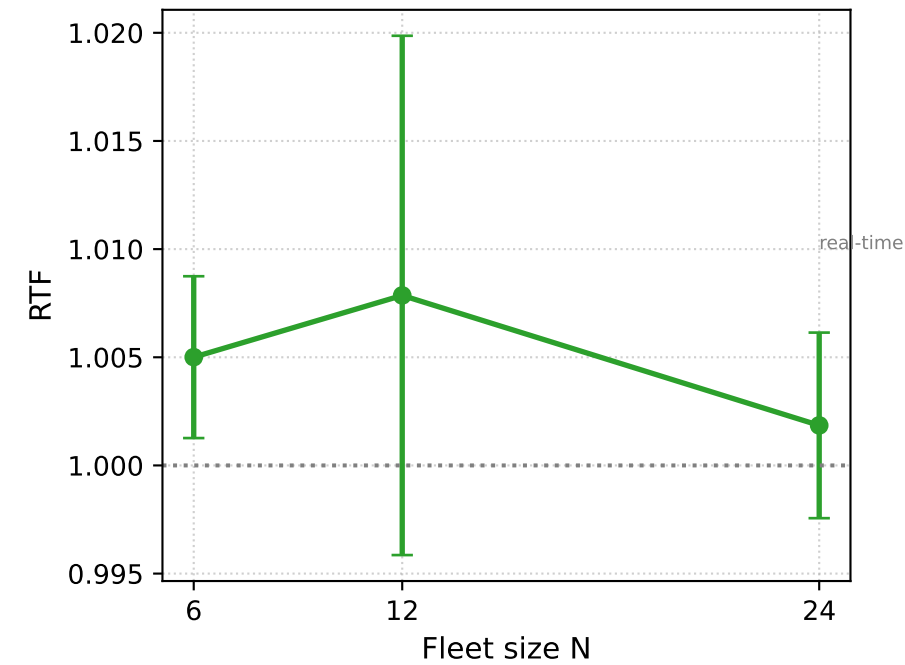


ROS 2 message latency

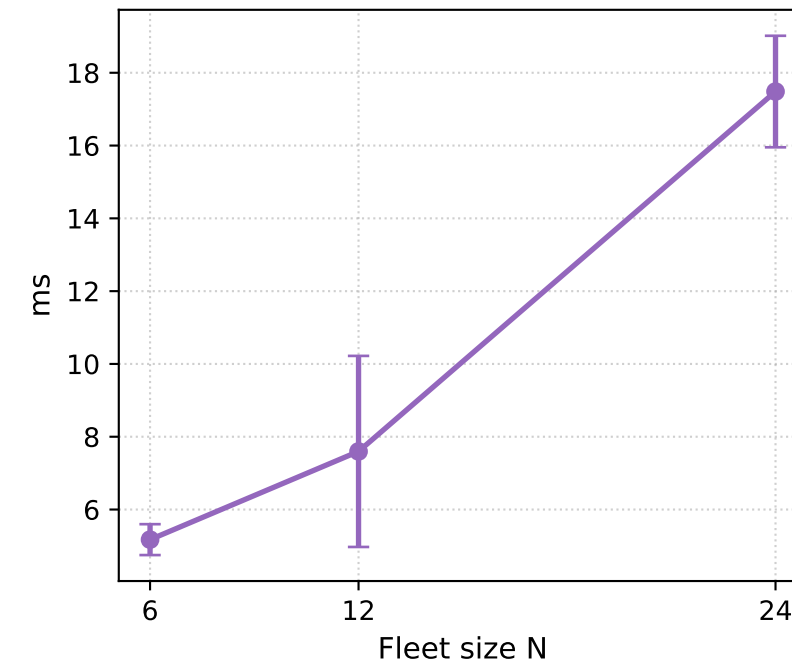

UAV arming success

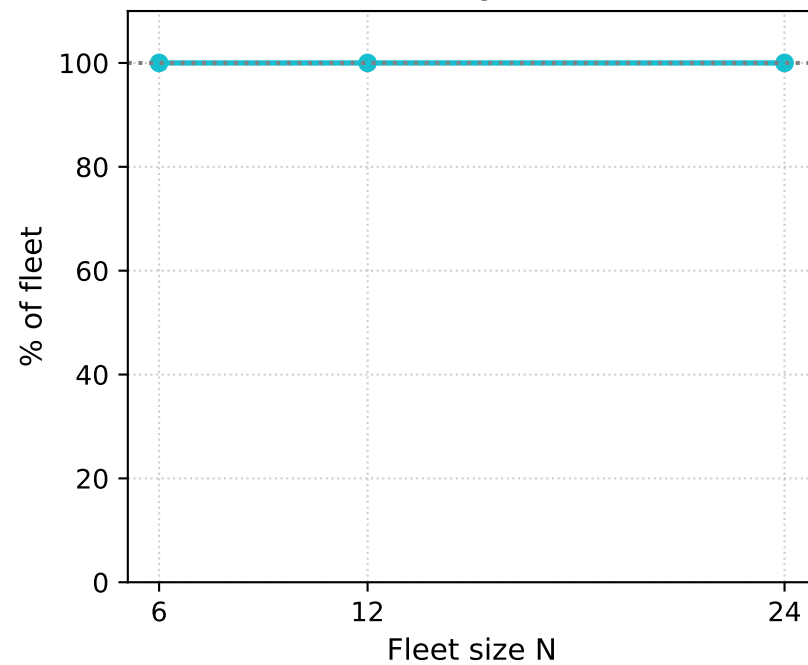

MAVLink timeouts / process failures

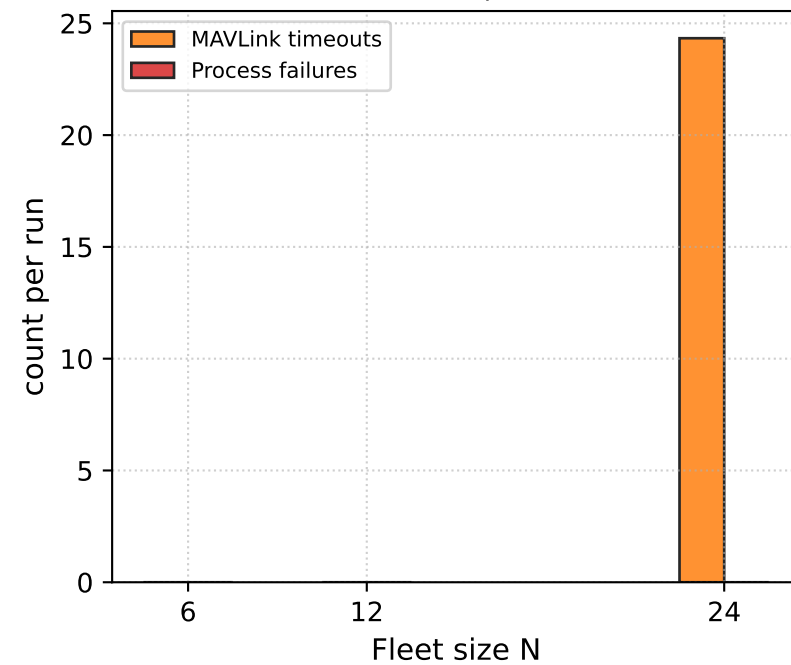

Log size per run

