Doc Number: 161310G00000-00	Doc Version: 008	Date: 28-Oct-2026

Super Mushshak Automatic Flight Test

Prepar3D v5 | Rahwali Airfield (OPRW) | Automatic Testing Mode

Super Mushshak Logger - ver. 1.0

Super Mushshak Airborne Automatic Testing Suite

Flight Test File: Super_Mushak_P3D_State_Diagnostic_auto_2026-10-28_13-51-18.csv


ONLINE, AUTOMATIC

Test Date: 28-Oct-2026 Test Time: 13:51:18


Initial Test Conditions


Validation	Sim		
*** **Weight and Balance** ***			
847.8		-	Gross Wt (kg)
108.6		-	Total Fuel Quantity (kg)
0.00		-	CG Pos in X Axis (mm)
0.00		-	CG Pos in Y Axis (mm)
*** **Control Parameters** ***			
-27.8		-	Pitch Control Position (raw)
-4.23		-	Roll Control Position (raw)
0.00		-	Rudder Pedal Position (raw)
80.0		-	Throttle Position (%)
-0.00		-	Pitch Force: Applied/Virtual (N)
0.00		-	Roll Force: Applied/Virtual (N)
0.00		-	Yaw Force: Applied/Virtual (N)
*** **Environment Parameters** ***			
1013		-	Baro Press (hPa)
10.7		-	OAT (deg C)
323.1		-	Wind Dir (mag,deg)
8.00		-	Wind Spd (kt)
*** **Engine Parameters (Piston Engine)** ***			
2655		-	Engine Speed (RPM)
80.0		-	Throttle Position (%)
0.00		-	Fuel Flow (pph)
533.2		-	Exhaust Gas Temp (deg C)


Validation	Sim		
*** **Flight Parameters** ***			
79.8		-	Indicated Airspeed (kt)
83.5		-	Ground Speed (kt)
0.13		-	Mach Number (-)
3000		-	Pressure Alt (ft)
2255		-	Radar Alt (ft)
750.0		-	Height of Terrain (ft)
489.1		-	Vertical Velocity (ft/min)
0.00		-	Pitch Angle (deg)
-0.00		-	Bank Angle (deg)
48.4		-	Heading (deg)
0.04		-	Aircraft Angle of Attack (deg)
-0.01		-	Sideslip Angle (deg)
80.1		-	Track Angle (deg)
0.15		-	Roll Rate (deg/s)
0.49		-	Pitch Rate (deg/s)
-0.00		-	Yaw Rate (deg/s)
0.01		-	X Body Acceleration (g)
-16.9		-	Y Body Acceleration (g)
3.05		-	Z Body Acceleration (g)

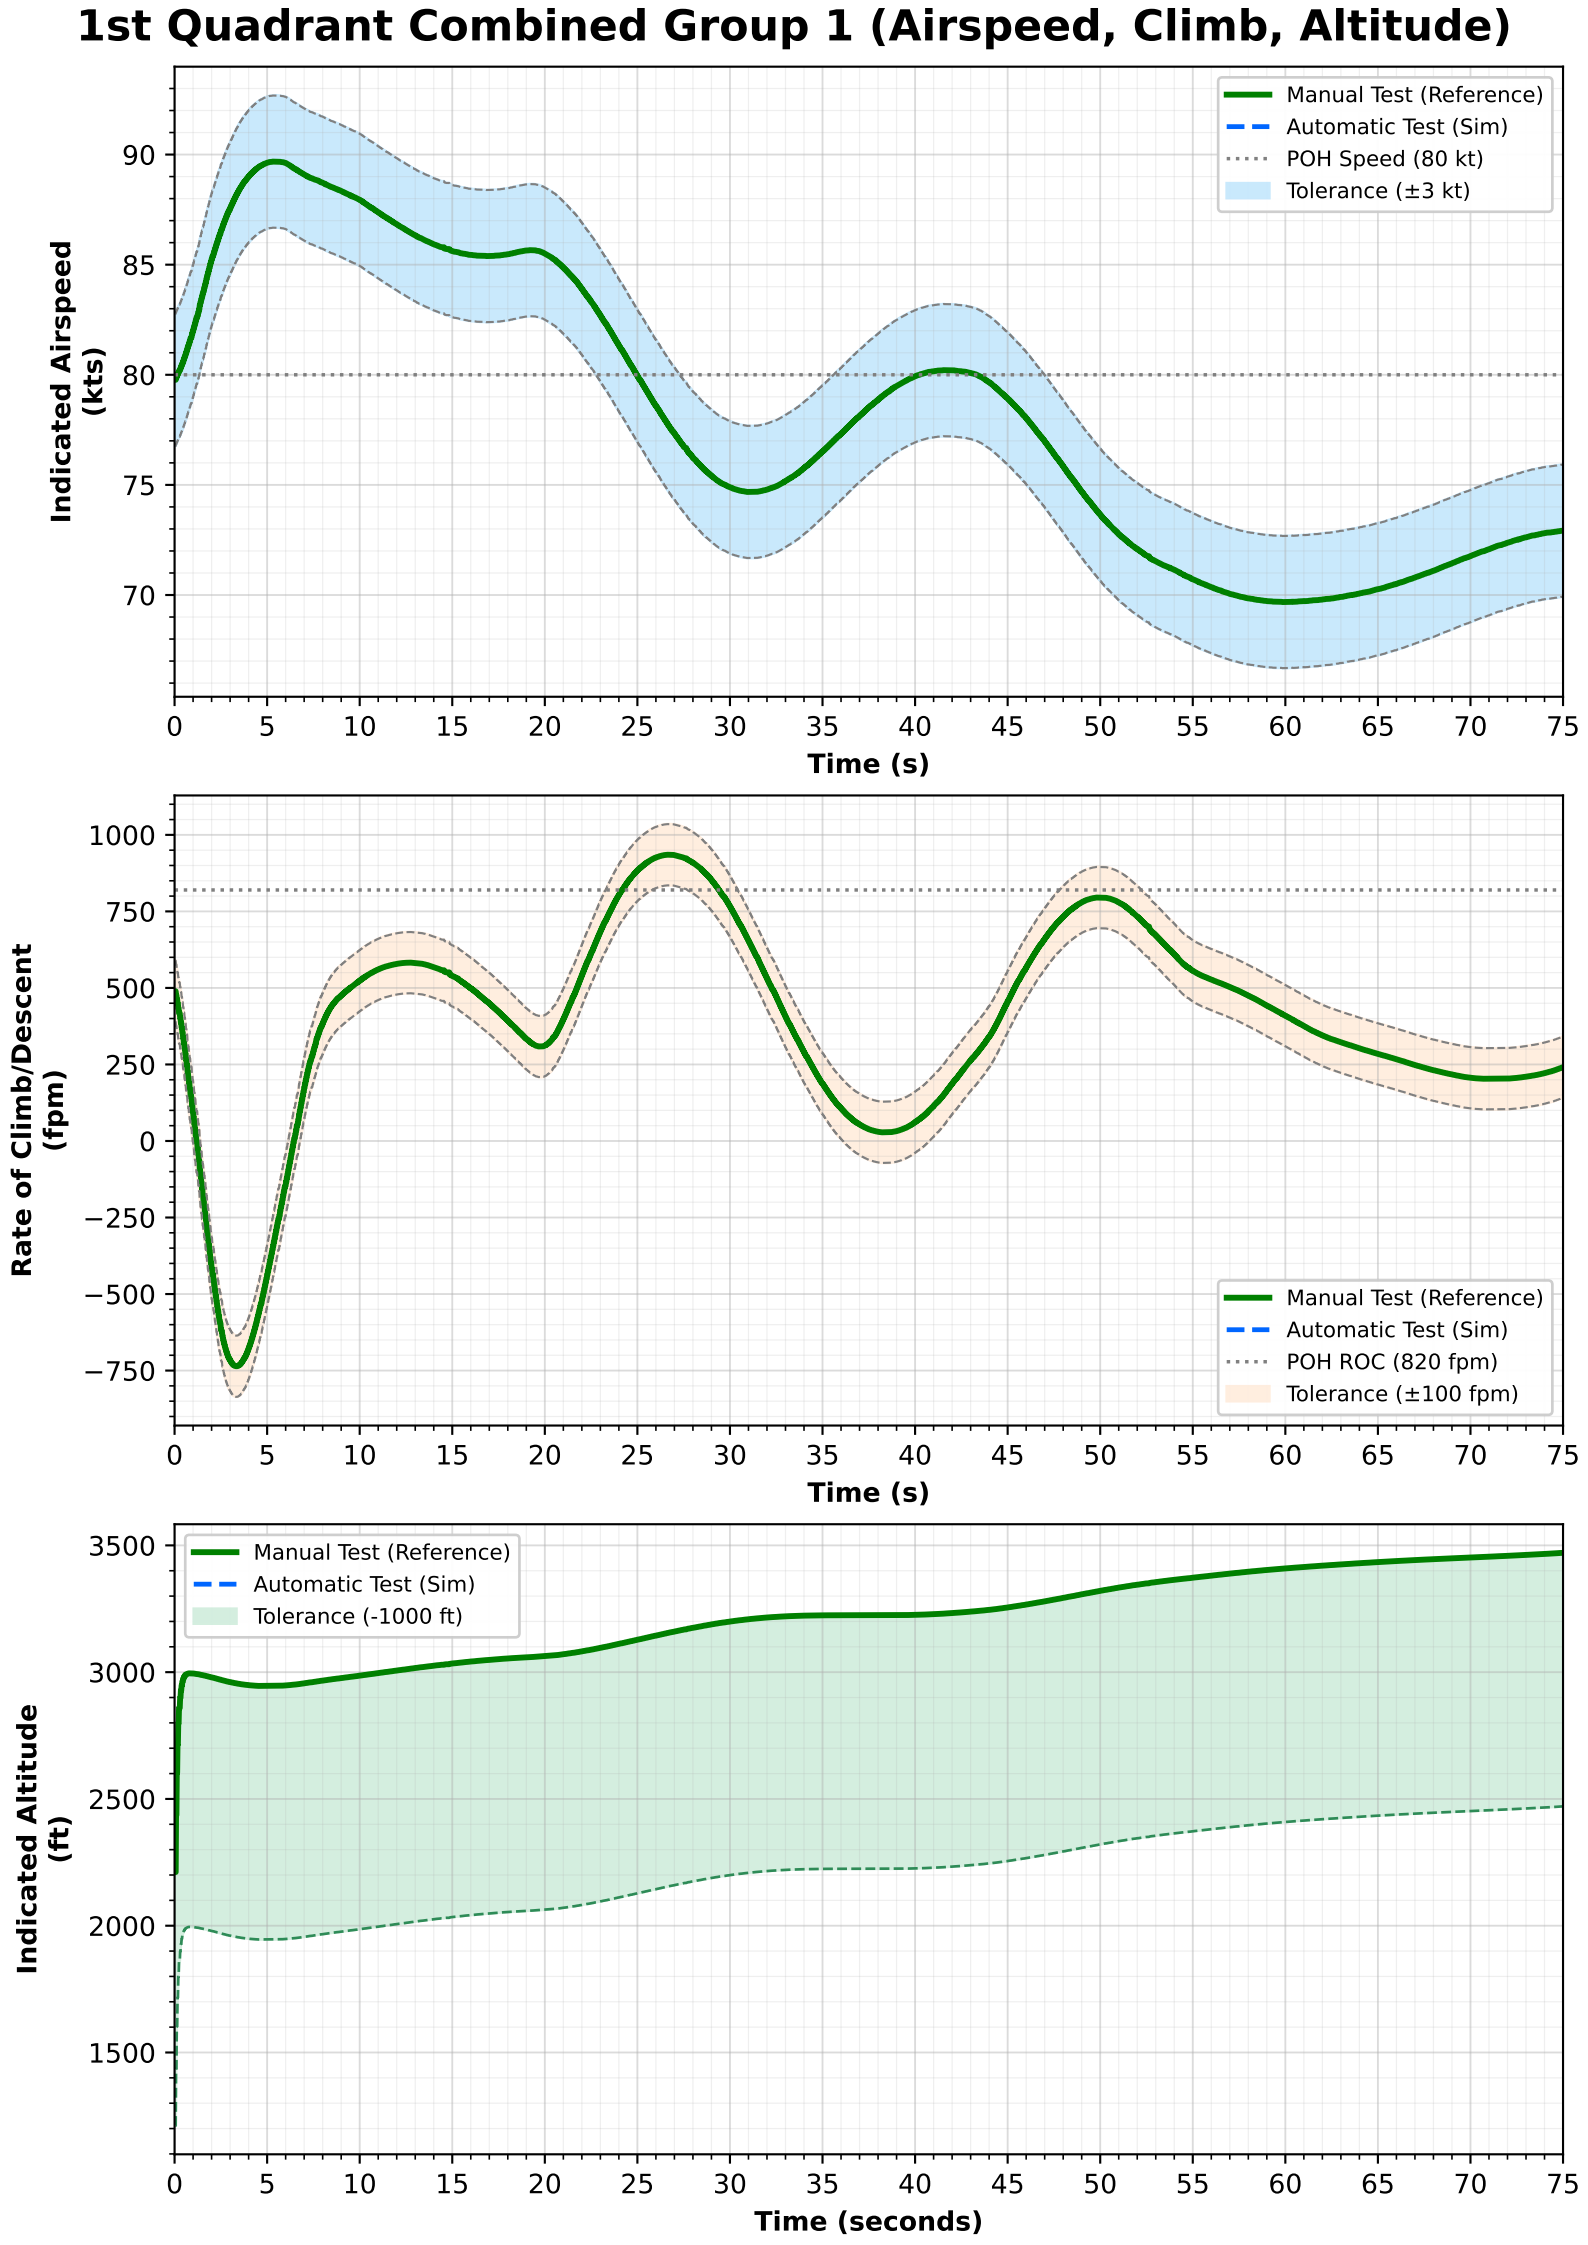

1st Quadrant Combined Group 1 (Airspeed, Climb, Altitude)
Indicated Airspeed (kts)
Manual Test (Reference)
Automatic Test (Sim)
POH Speed (80 kt)
Tolerance (±3 kt)
Time (s)
Rate of Climb/Descent (fpm)
Manual Test (Reference)
Automatic Test (Sim)
POH ROC (820 fpm)
Tolerance (±100 fpm)
Time (s)
Indicated Altitude (ft)
Manual Test (Reference)
Automatic Test (Sim)
Tolerance (-1000 ft)
Time (seconds)


1st Quadrant Combined Group 2 (Pitch, Bank, Yaw, Heading)

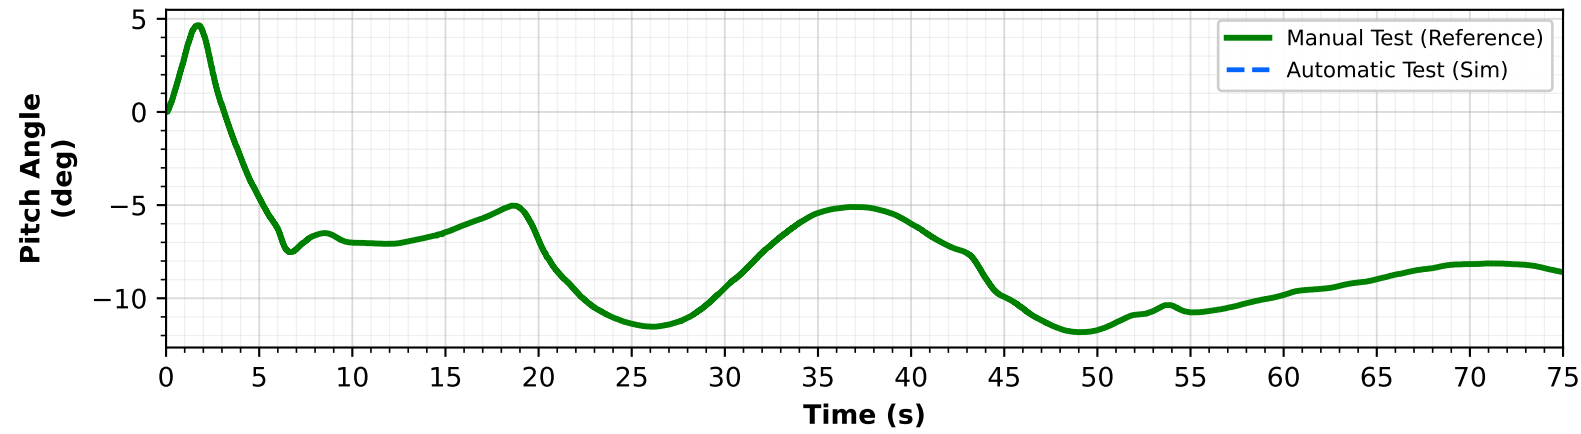

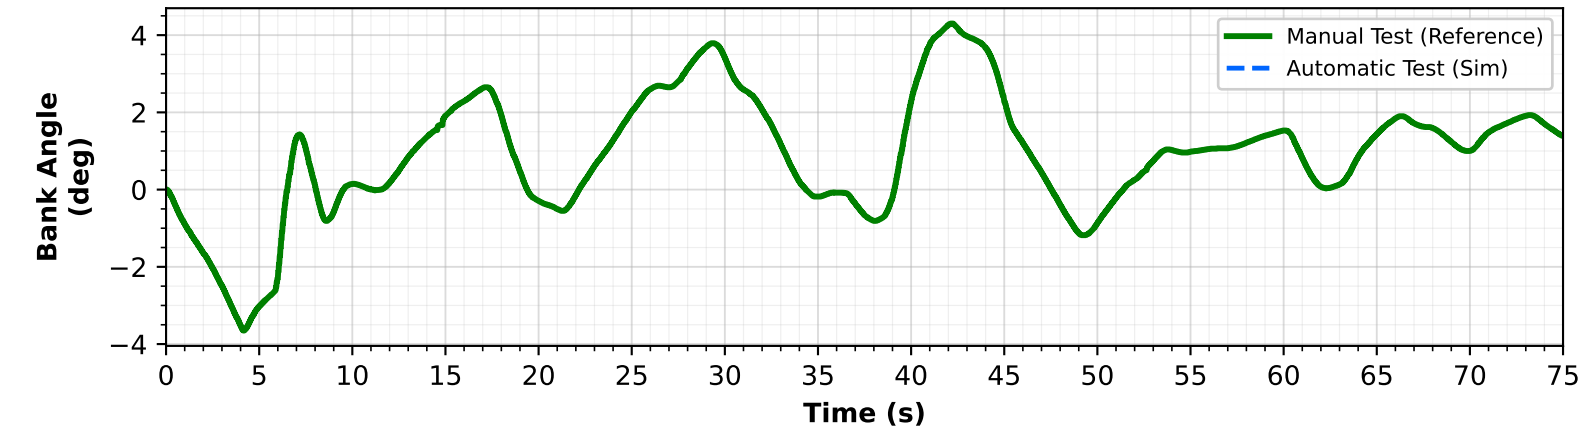


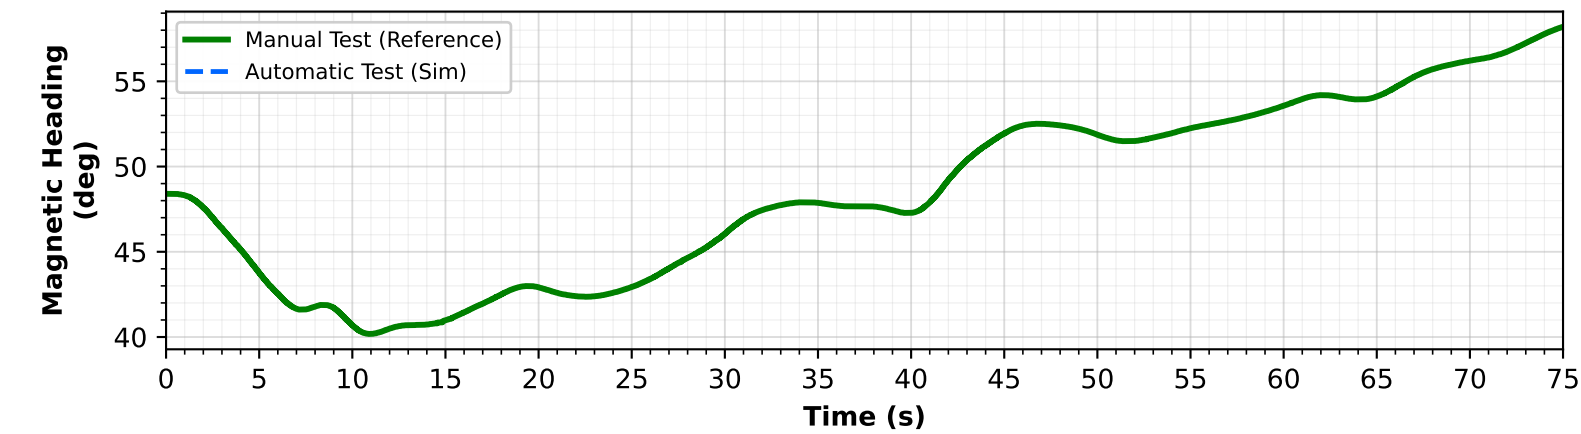


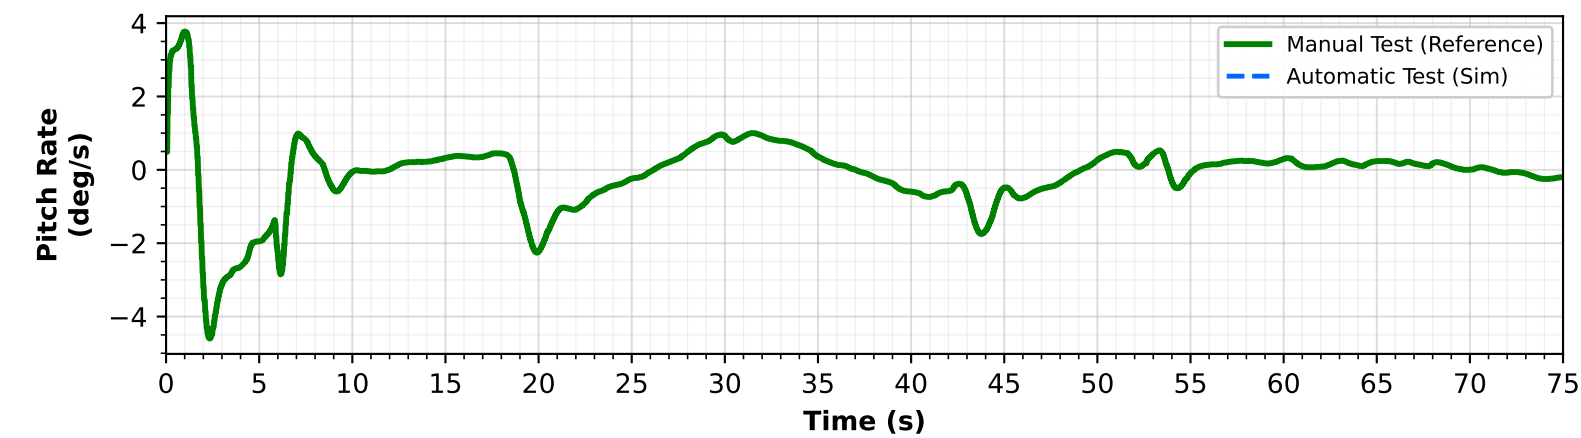


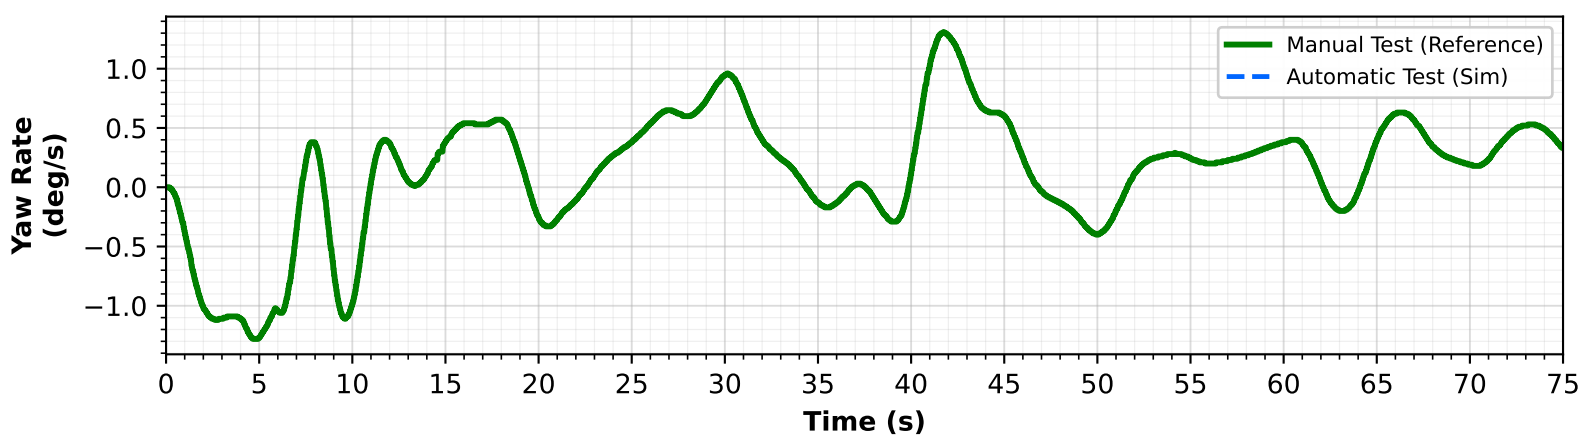



1st Quadrant Combined Group 3 (Propeller, Engine, Throttle)

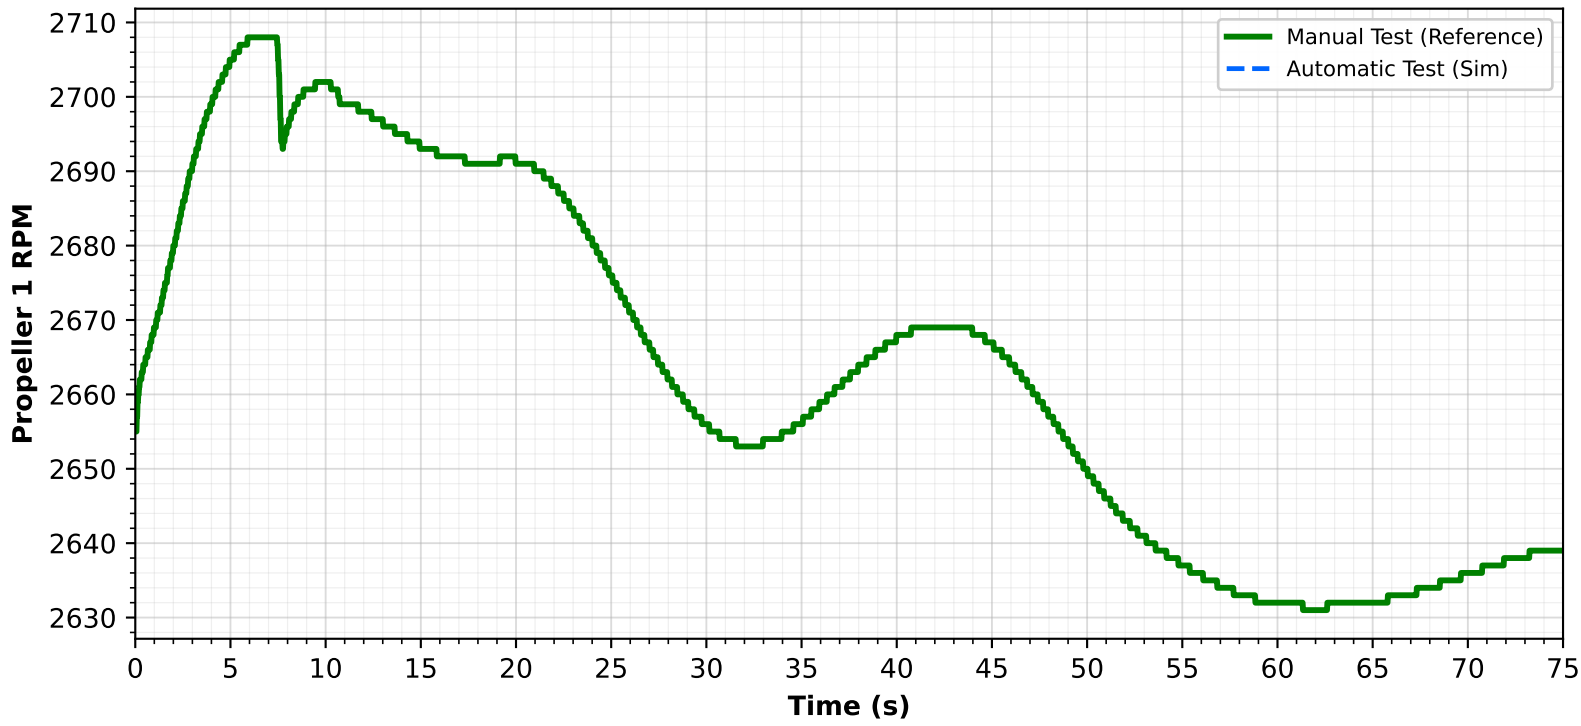

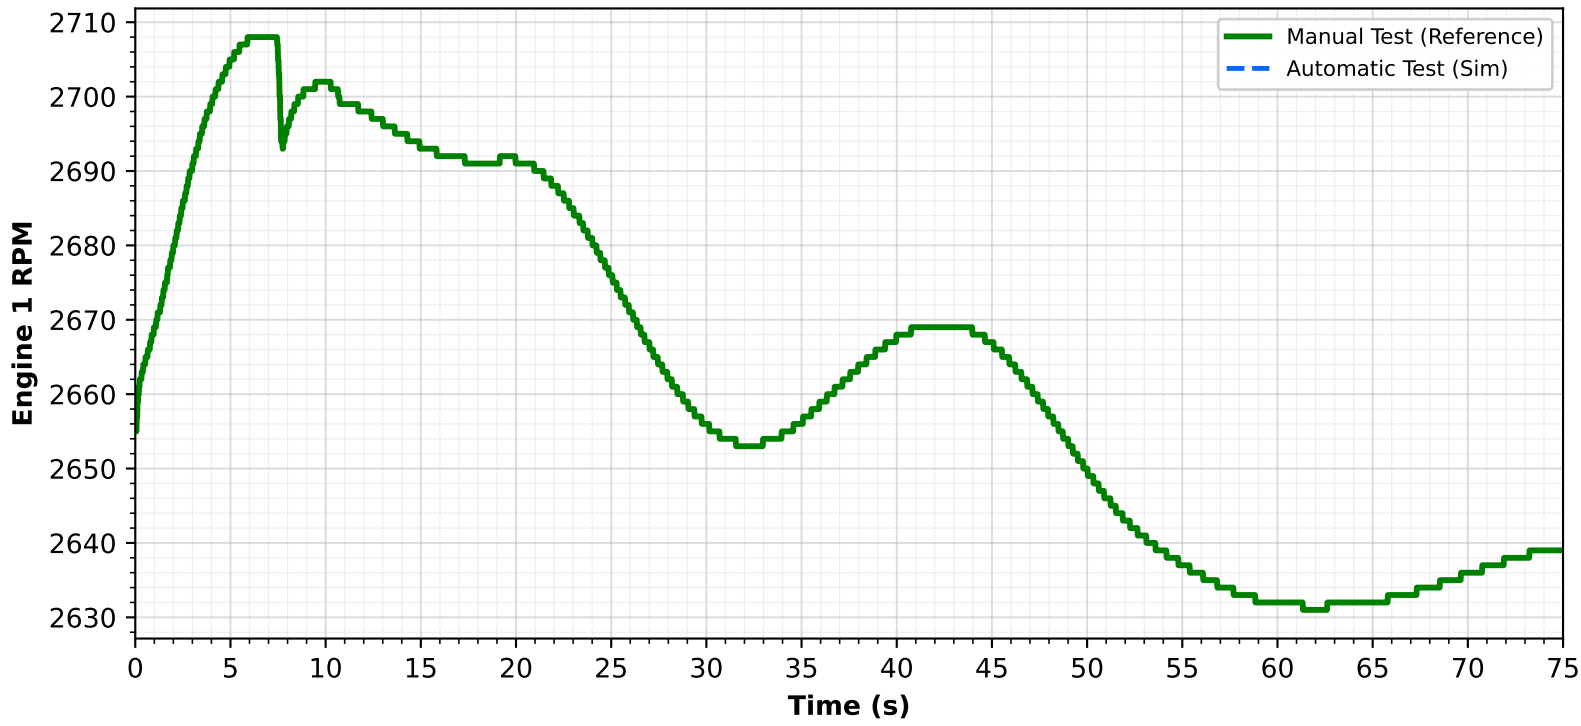

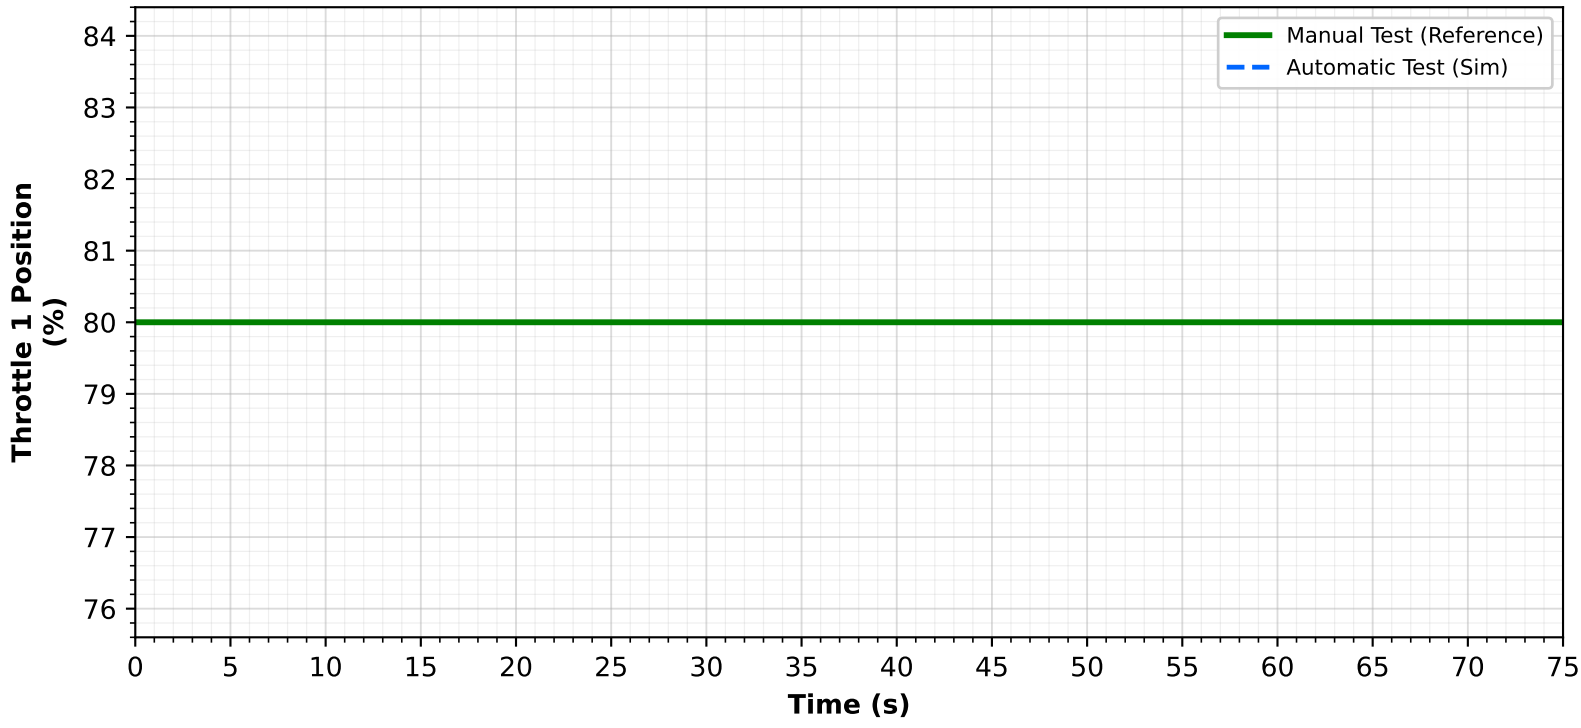

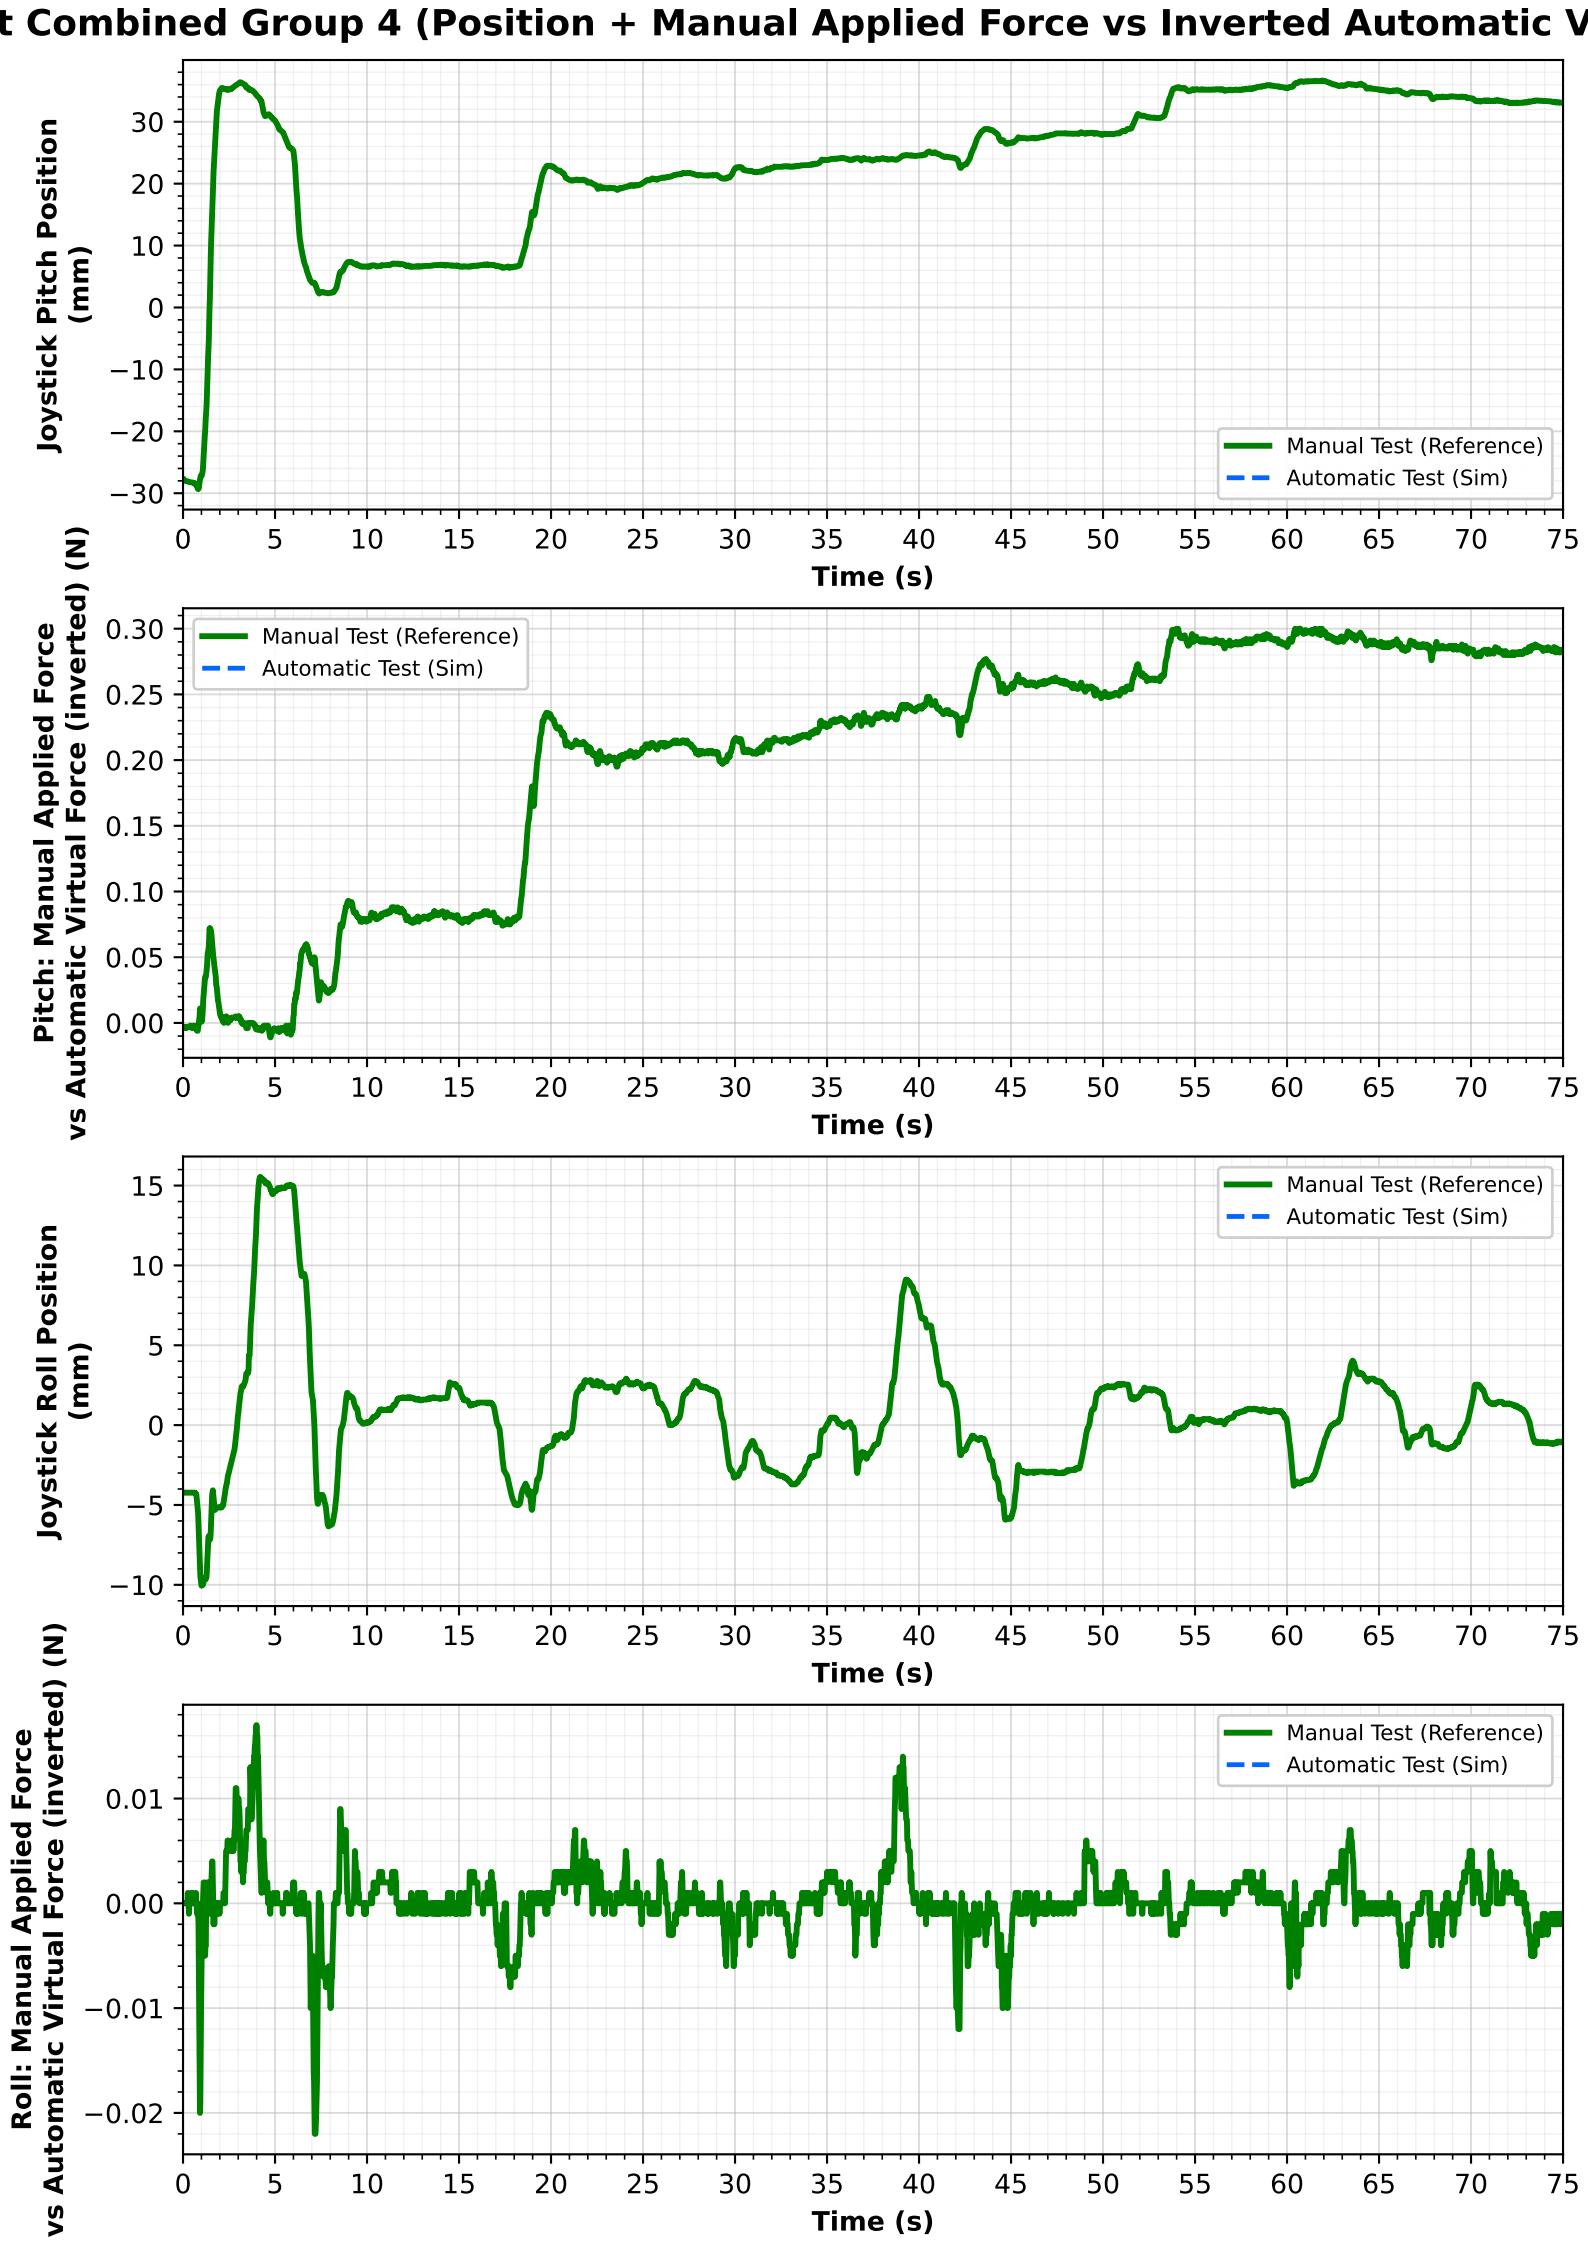
t Combined Group 4 (Position + Manual Applied Force vs Inverted Automatic V
Joystick Pitch Position (mm)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Pitch: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Joystick Roll Position (mm)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Roll: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)

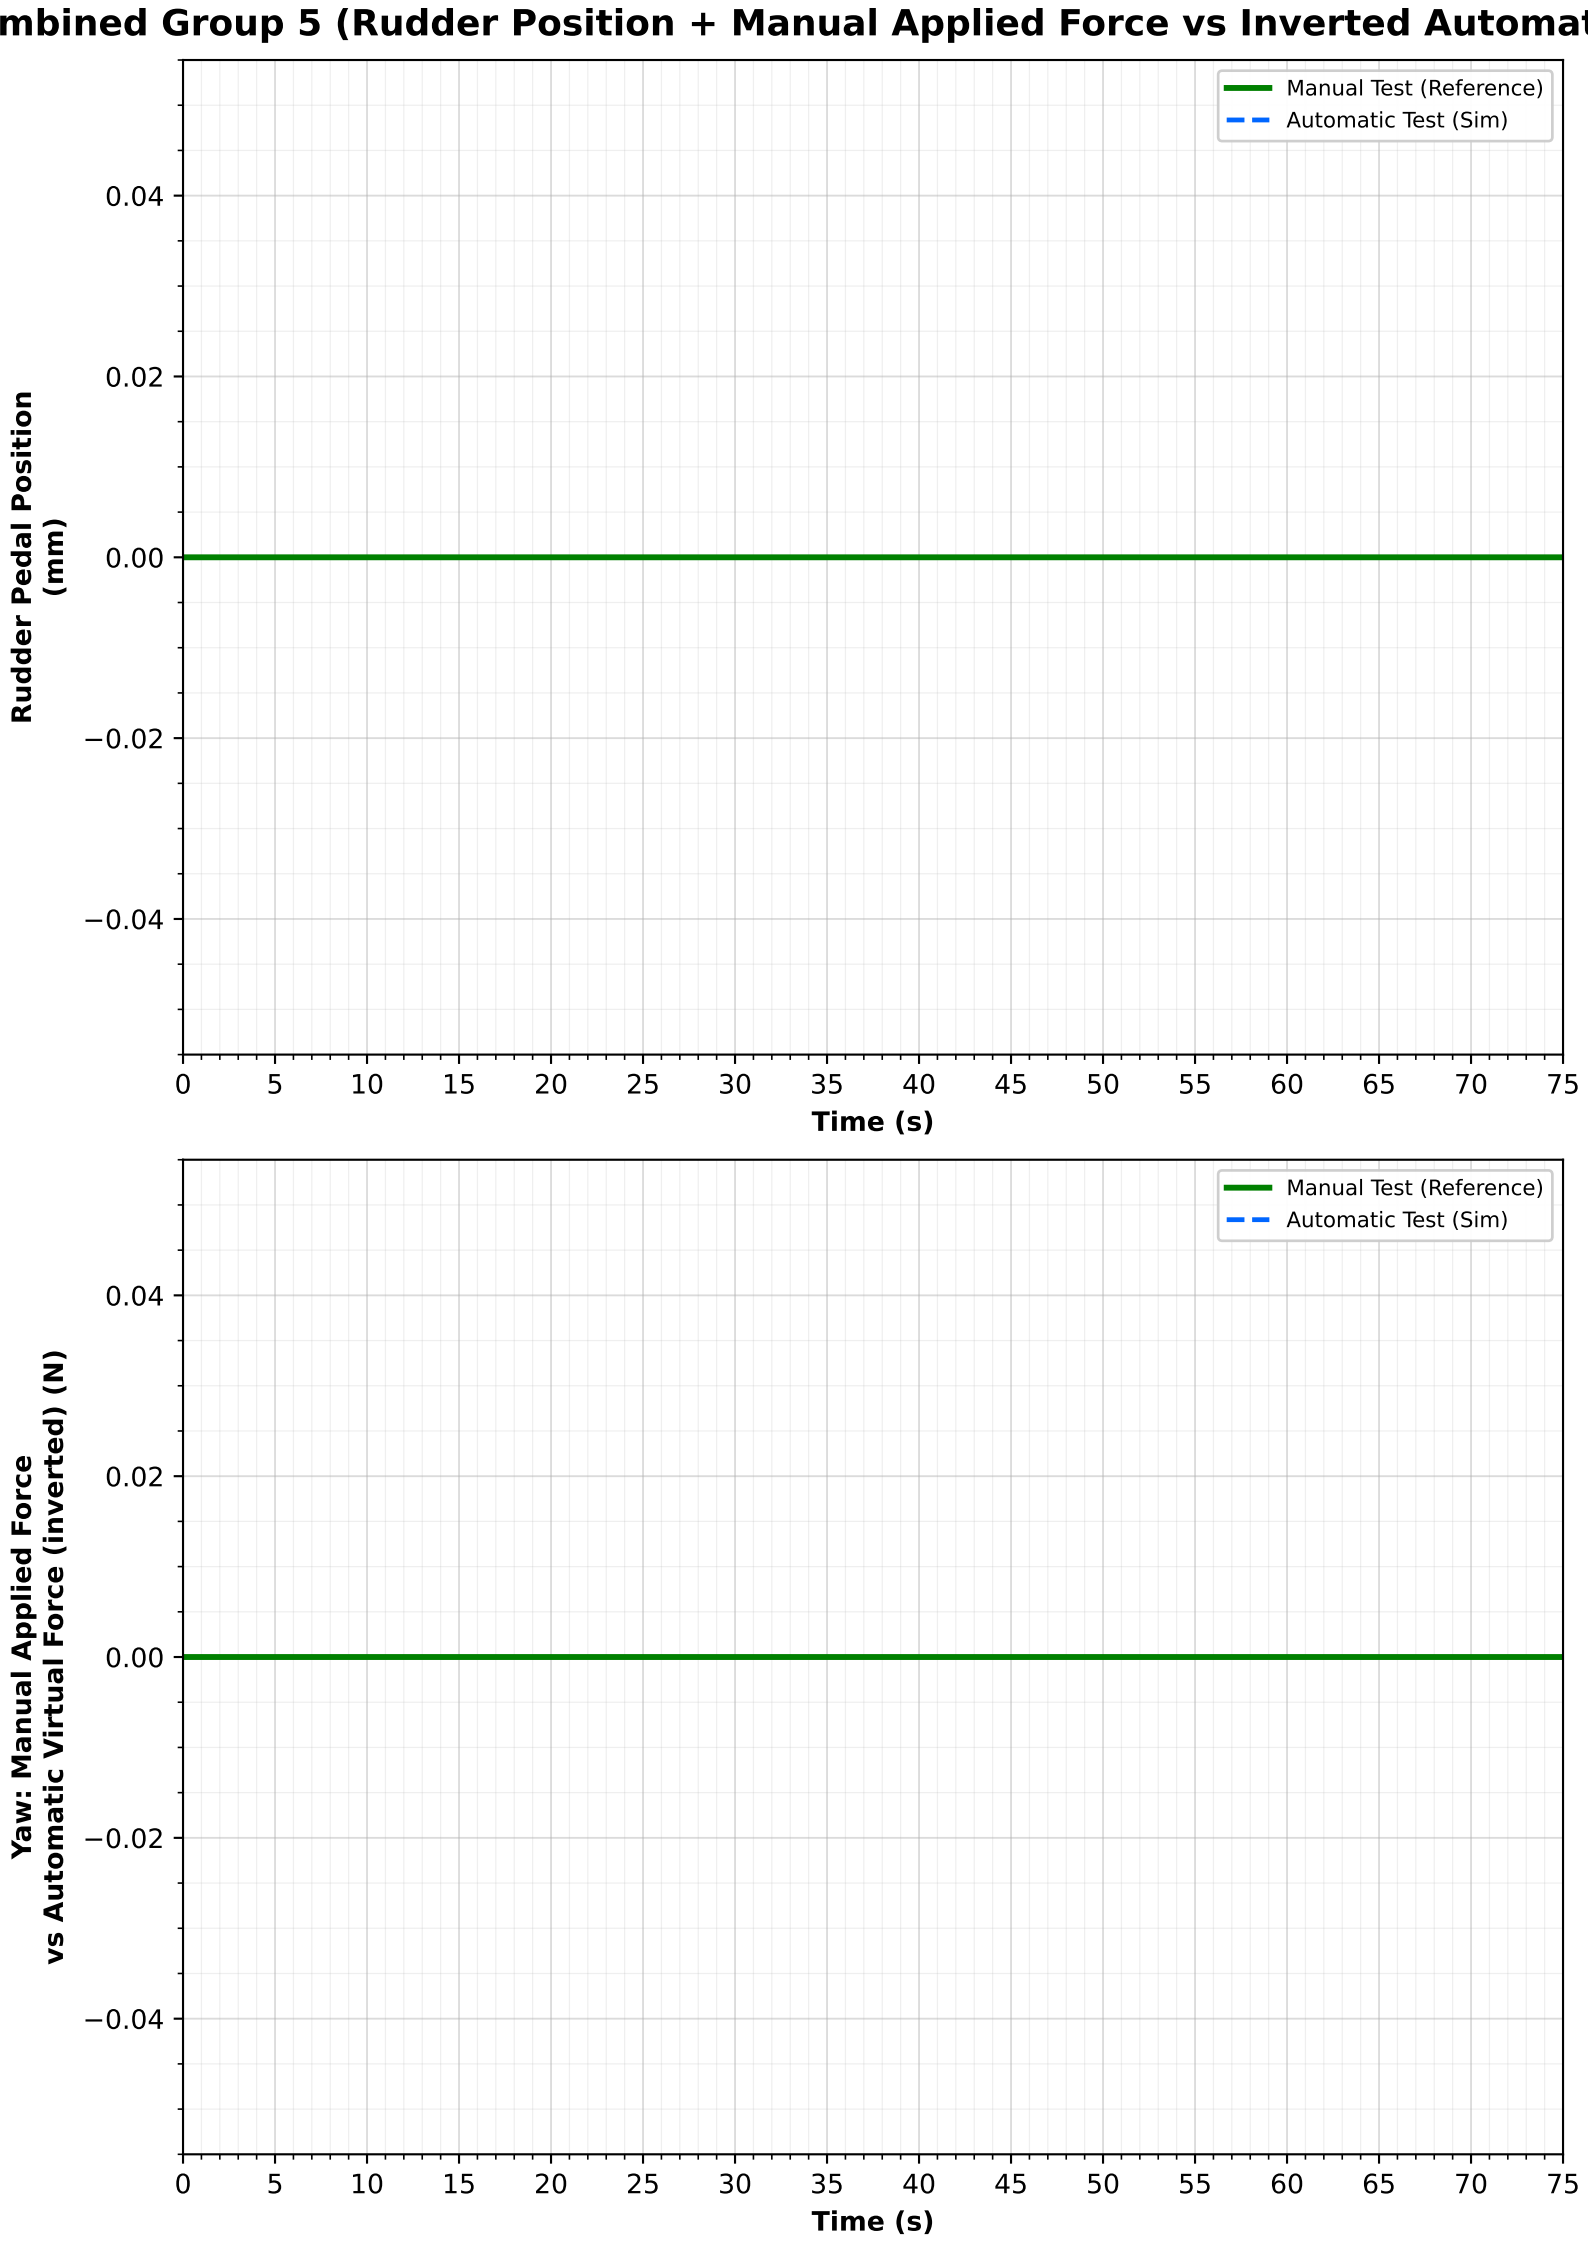
mbined Group 5 (Rudder Position + Manual Applied Force vs Inverted Automat
Manual Test (Reference)
Automatic Test (Sim)
Rudder Pedal Position (mm)
0.04
0.02
0.00
−0.02
−0.04
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)
Manual Test (Reference)
Automatic Test (Sim)
Yaw: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
0.04
0.02
0.00
−0.02
−0.04
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)