Doc Number: 161310G00000-00	Doc Version: 008	Date: 02-Nov-2026

Super Mushshak Automatic Flight Test

Prepar3D v5 | Rahwali Airfield (OPRW) | Automatic Testing Mode

Super Mushshak Logger - ver. 1.0

Super Mushshak Airborne Automatic Testing Suite

Flight Test File: Super_Mushak_auto_takeoff_data_2026-11-02_09-58-12.csv


ONLINE, AUTOMATIC

Test Date: 02-Nov-2026 Test Time: 09:58:12


Initial Test Conditions


Validation	Sim	
***** Weight and Balance *****		
847.8	847.8	Gross Wt (kg)
108.6	108.6	Total Fuel Quantity (kg)
0.00	0.00	CG Pos in X Axis (mm)
0.00	0.00	CG Pos in Y Axis (mm)
***** Control Parameters *****		
-27.8	-27.3	Pitch Control Position (raw)
-4.23	-3.29	Roll Control Position (raw)
0.00	0.00	Rudder Pedal Position (raw)
80.0	80.0	Throttle Position (%)
-0.00	-0.17	Pitch Force: Applied/Virtual (N)
0.00	-0.01	Roll Force: Applied/Virtual (N)
0.00	-0.00	Yaw Force: Applied/Virtual (N)
***** Environment Parameters *****		
1013	1013	Baro Press (hPa)
10.7	10.6	OAT (deg C)
323.1	323.1	Wind Dir (mag,deg)
8.00	8.20	Wind Spd (kt)
***** Engine Parameters (Piston Engine) *****		
2655	2700	Engine Speed (RPM)
80.0	80.0	Throttle Position (%)
0.00	0.00	Fuel Flow (pph)
533.2	533.8	Exhaust Gas Temp (deg C)


Validation	Sim	
***** Flight Parameters *****		
79.8	79.8	Indicated Airspeed (kt)
83.5	83.6	Ground Speed (kt)
0.13	0.13	Mach Number (-)
3000	3000	Pressure Alt (ft)
2255	2255	Radar Alt (ft)
750.0	750.0	Height of Terrain (ft)
489.1	567.8	Vertical Velocity (ft/min)
0.00	0.05	Pitch Angle (deg)
-0.00	-0.01	Bank Angle (deg)
48.4	48.4	Heading (deg)
0.04	0.20	Aircraft Angle of Attack (deg)
-0.01	-0.02	Sideslip Angle (deg)
80.1	163.9	Track Angle (deg)
0.15	0.50	Roll Rate (deg/s)
0.49	1.61	Pitch Rate (deg/s)
-0.00	0.03	Yaw Rate (deg/s)
0.01	-0.06	X Body Acceleration (g)
-16.9	-13.0	Y Body Acceleration (g)
3.05	3.83	Z Body Acceleration (g)

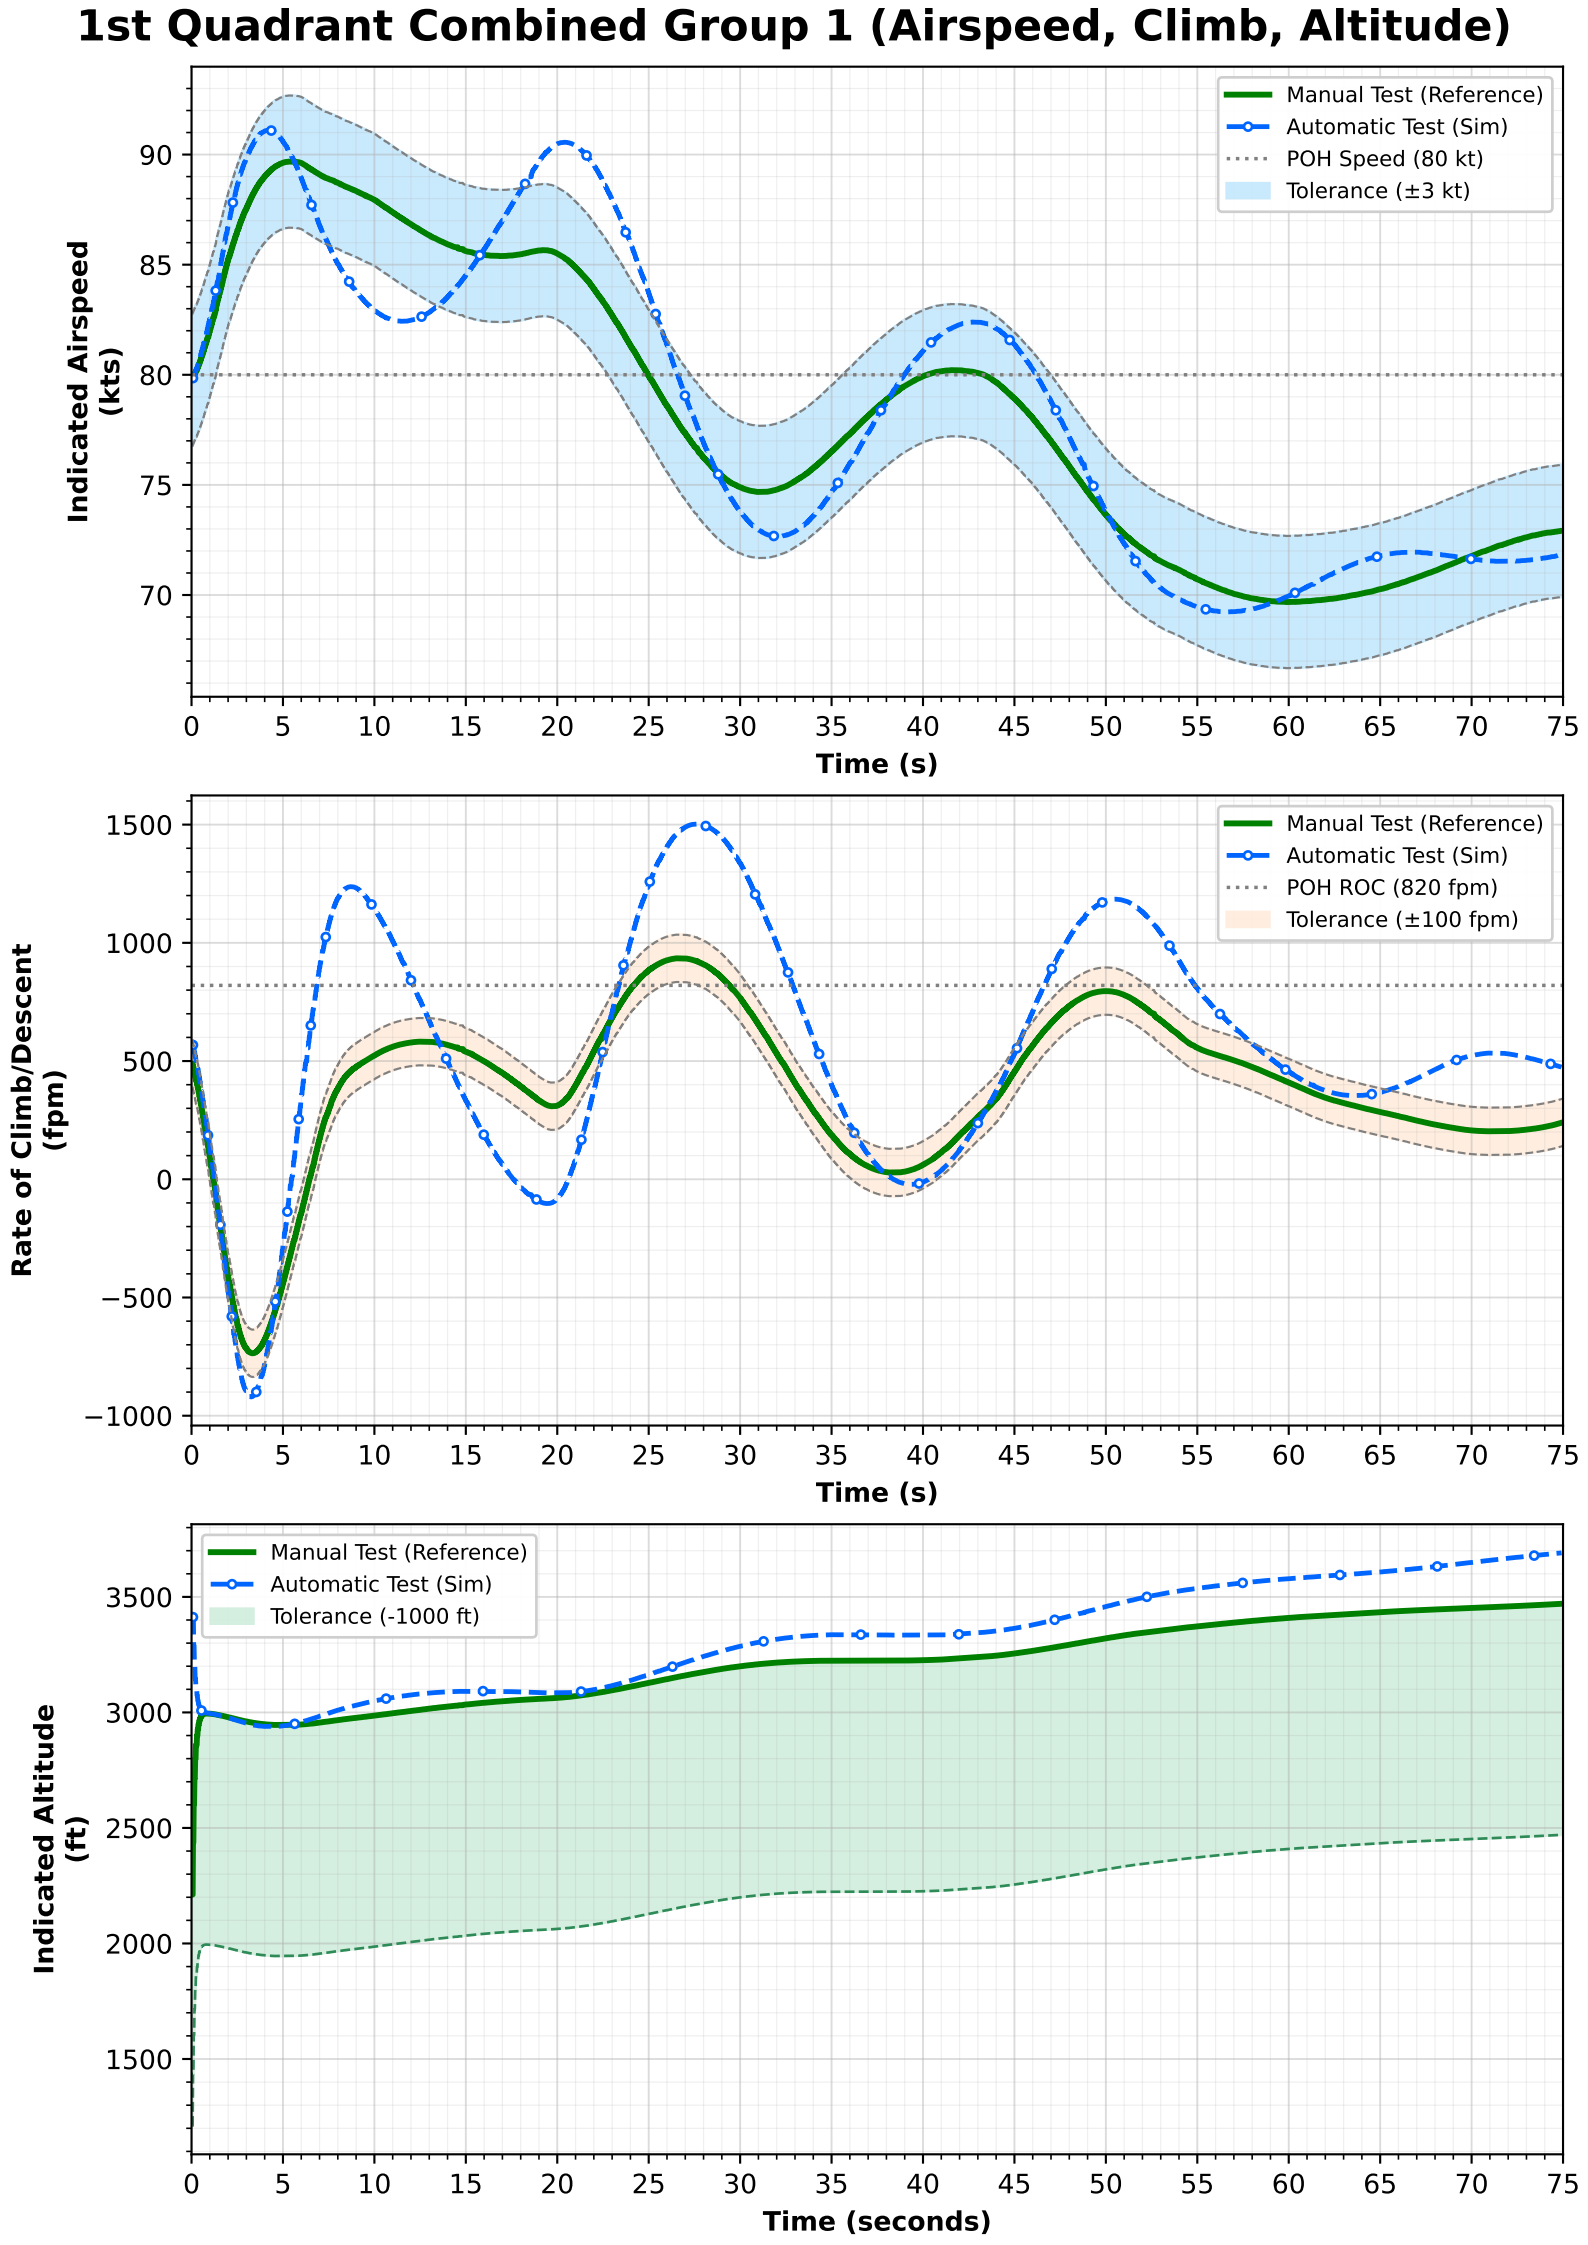

1st Quadrant Combined Group 1 (Airspeed, Climb, Altitude)
Manual Test (Reference)
Automatic Test (Sim)
POH Speed (80 kt)
Tolerance (±3 kt)
Indicated Airspeed (kts)
Time (s)
Manual Test (Reference)
Automatic Test (Sim)
POH ROC (820 fpm)
Tolerance (±100 fpm)
Rate of Climb/Descent (fpm)
Time (s)
Manual Test (Reference)
Automatic Test (Sim)
Tolerance (-1000 ft)
Indicated Altitude (ft)
Time (seconds)


1st Quadrant Combined Group 2 (Pitch, Bank, Yaw, Heading)

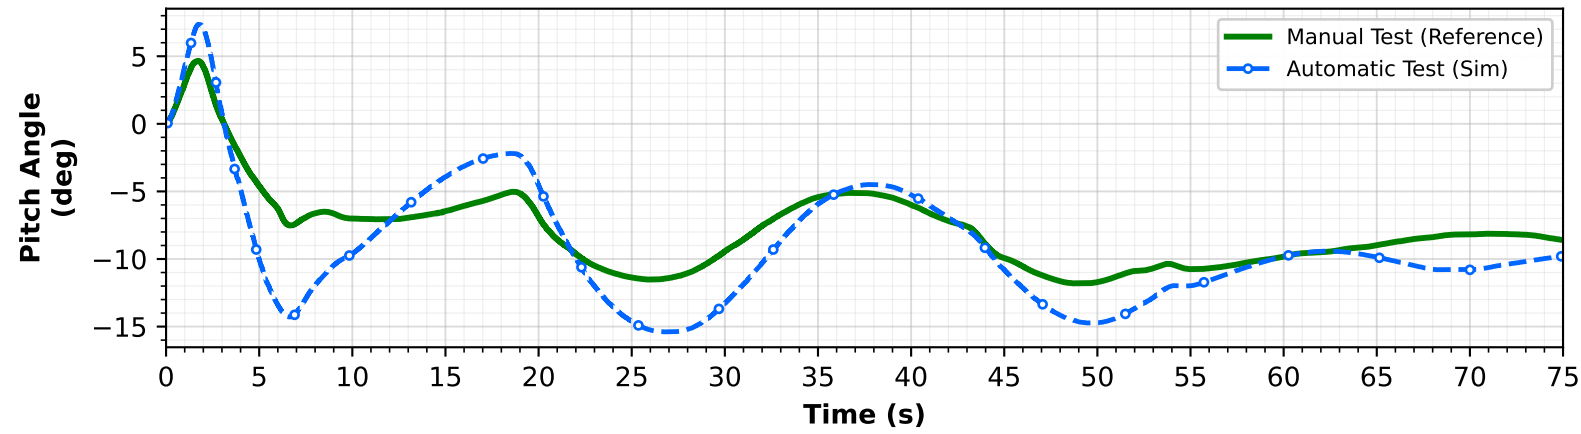

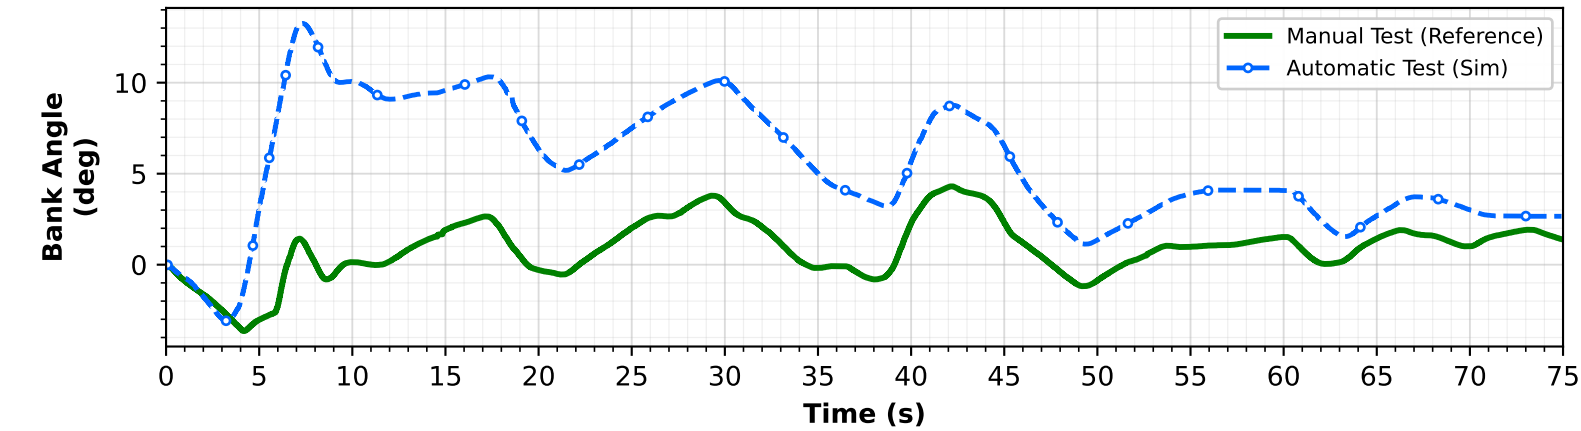


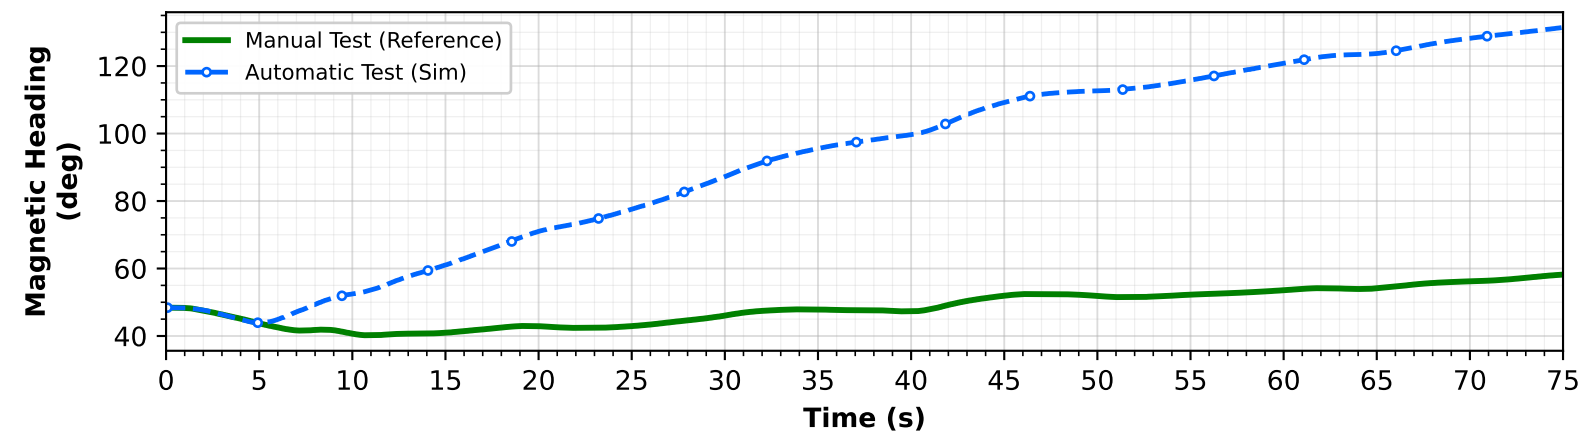


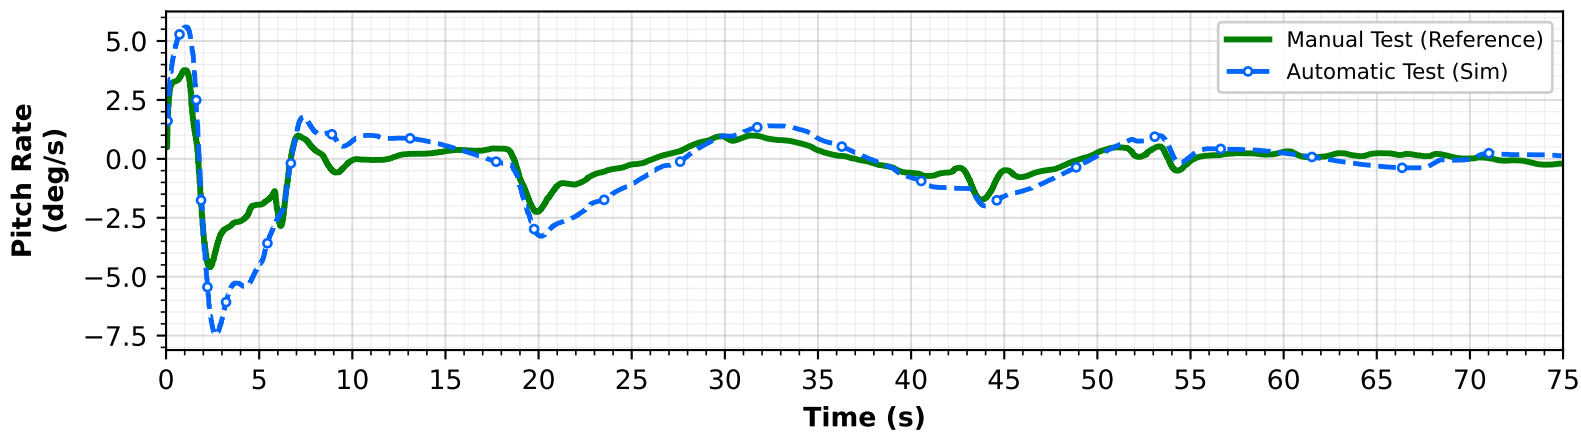


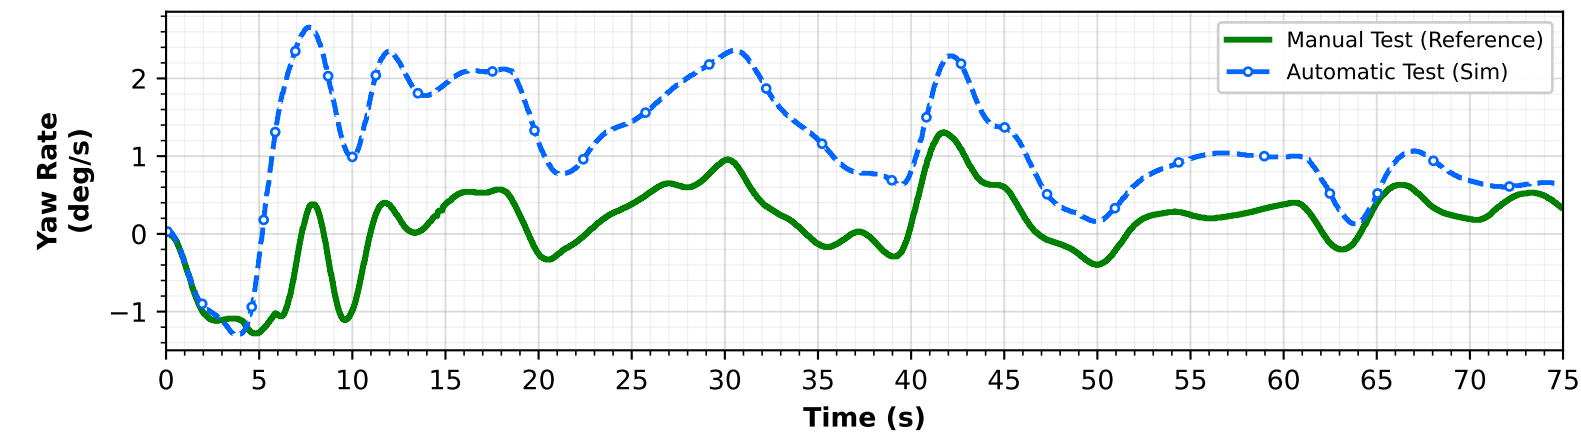



1st Quadrant Combined Group 3 (Propeller, Engine, Throttle)

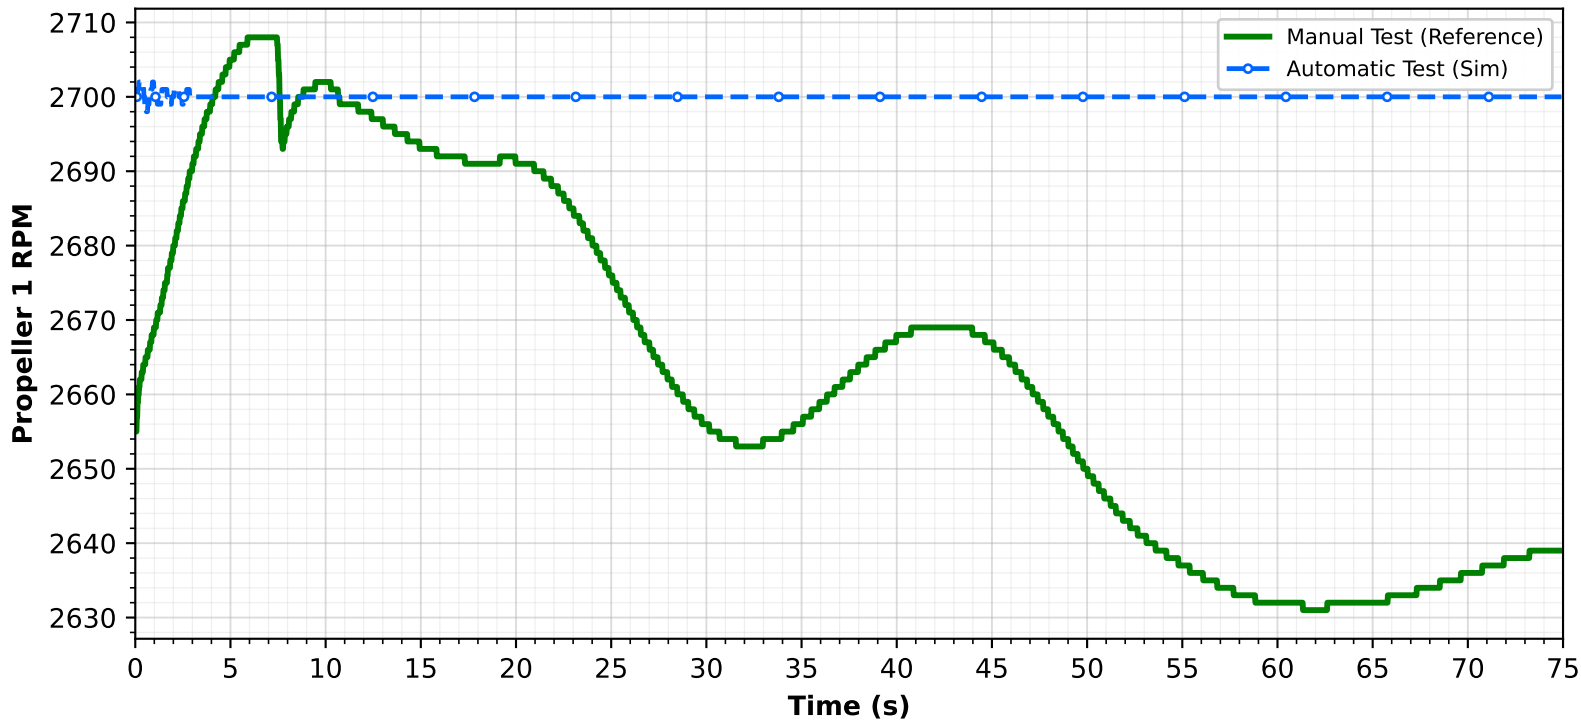

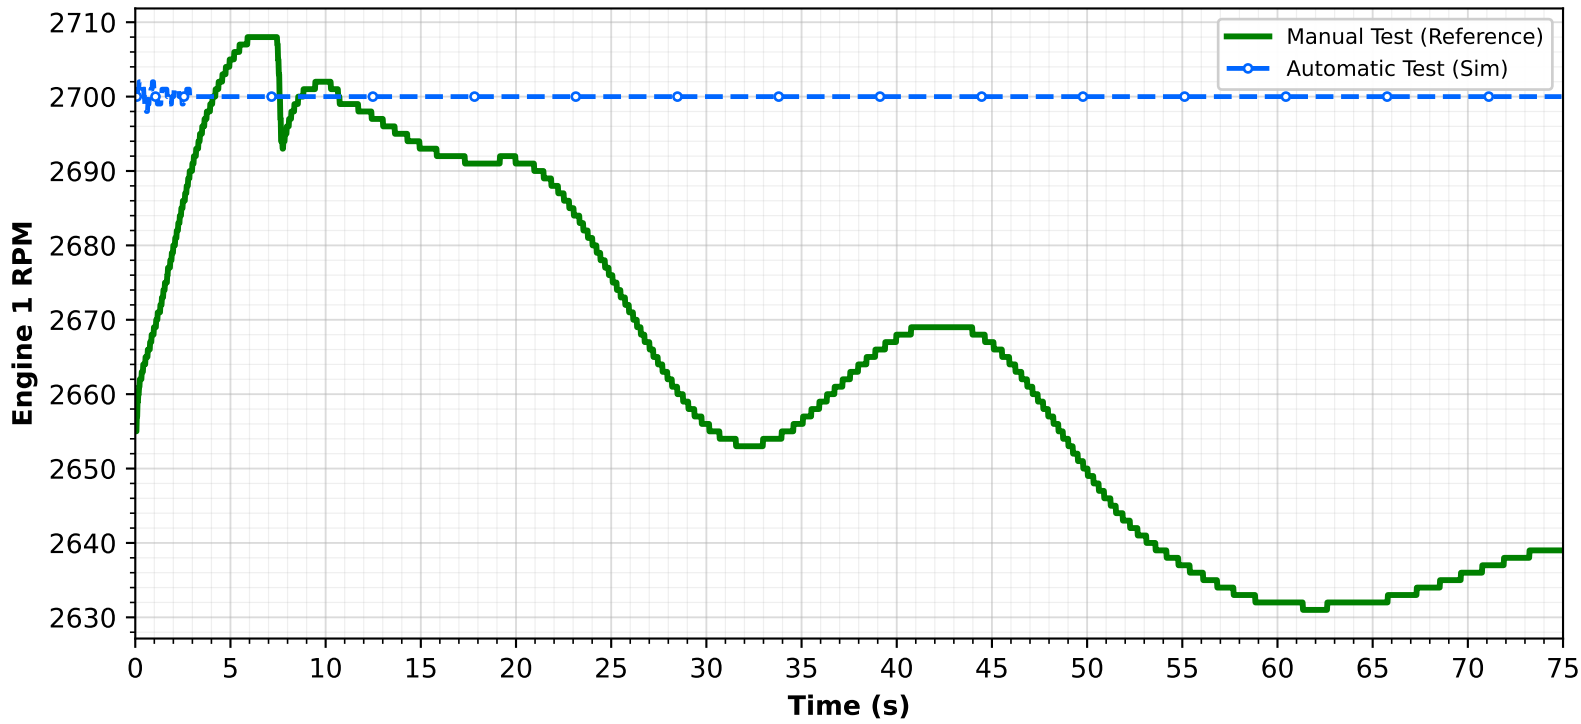

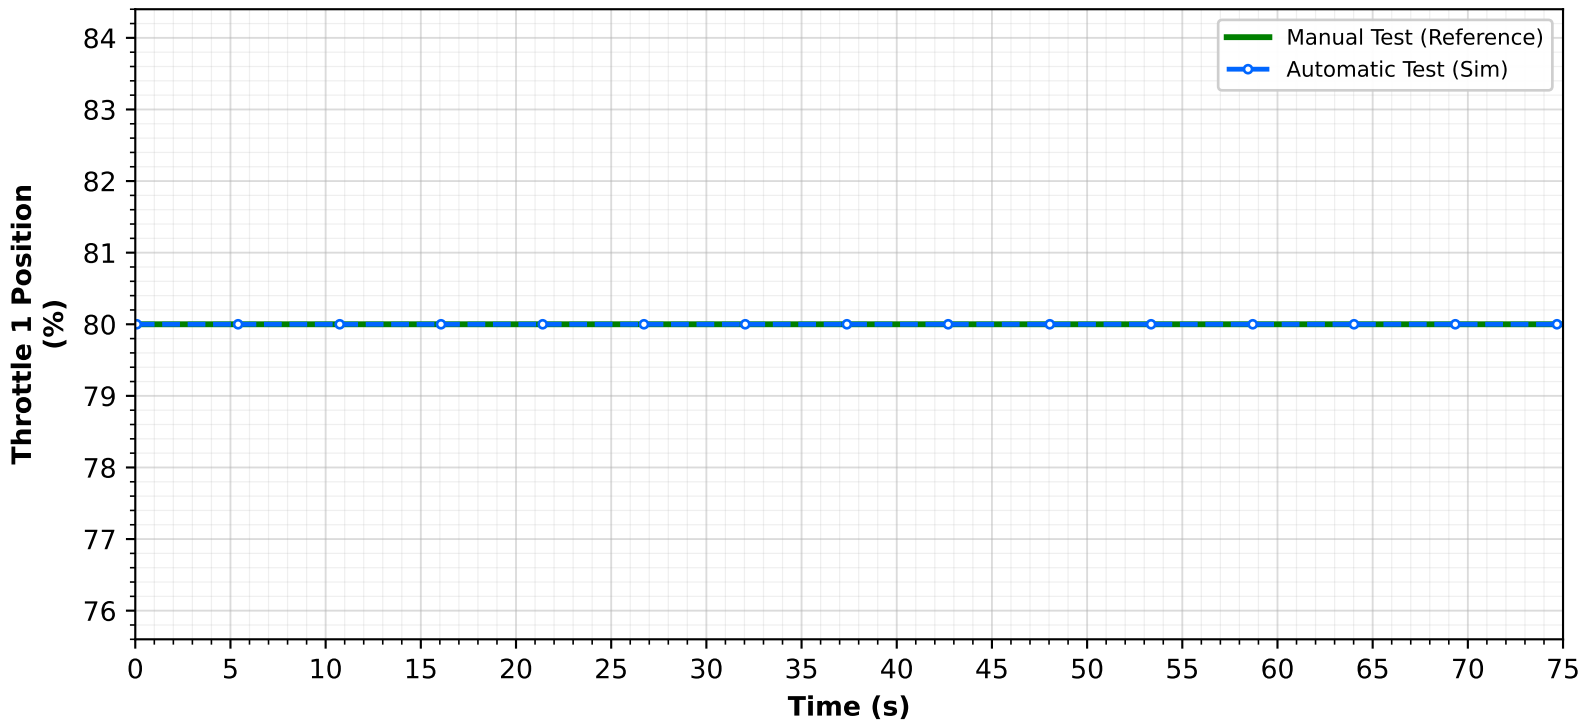

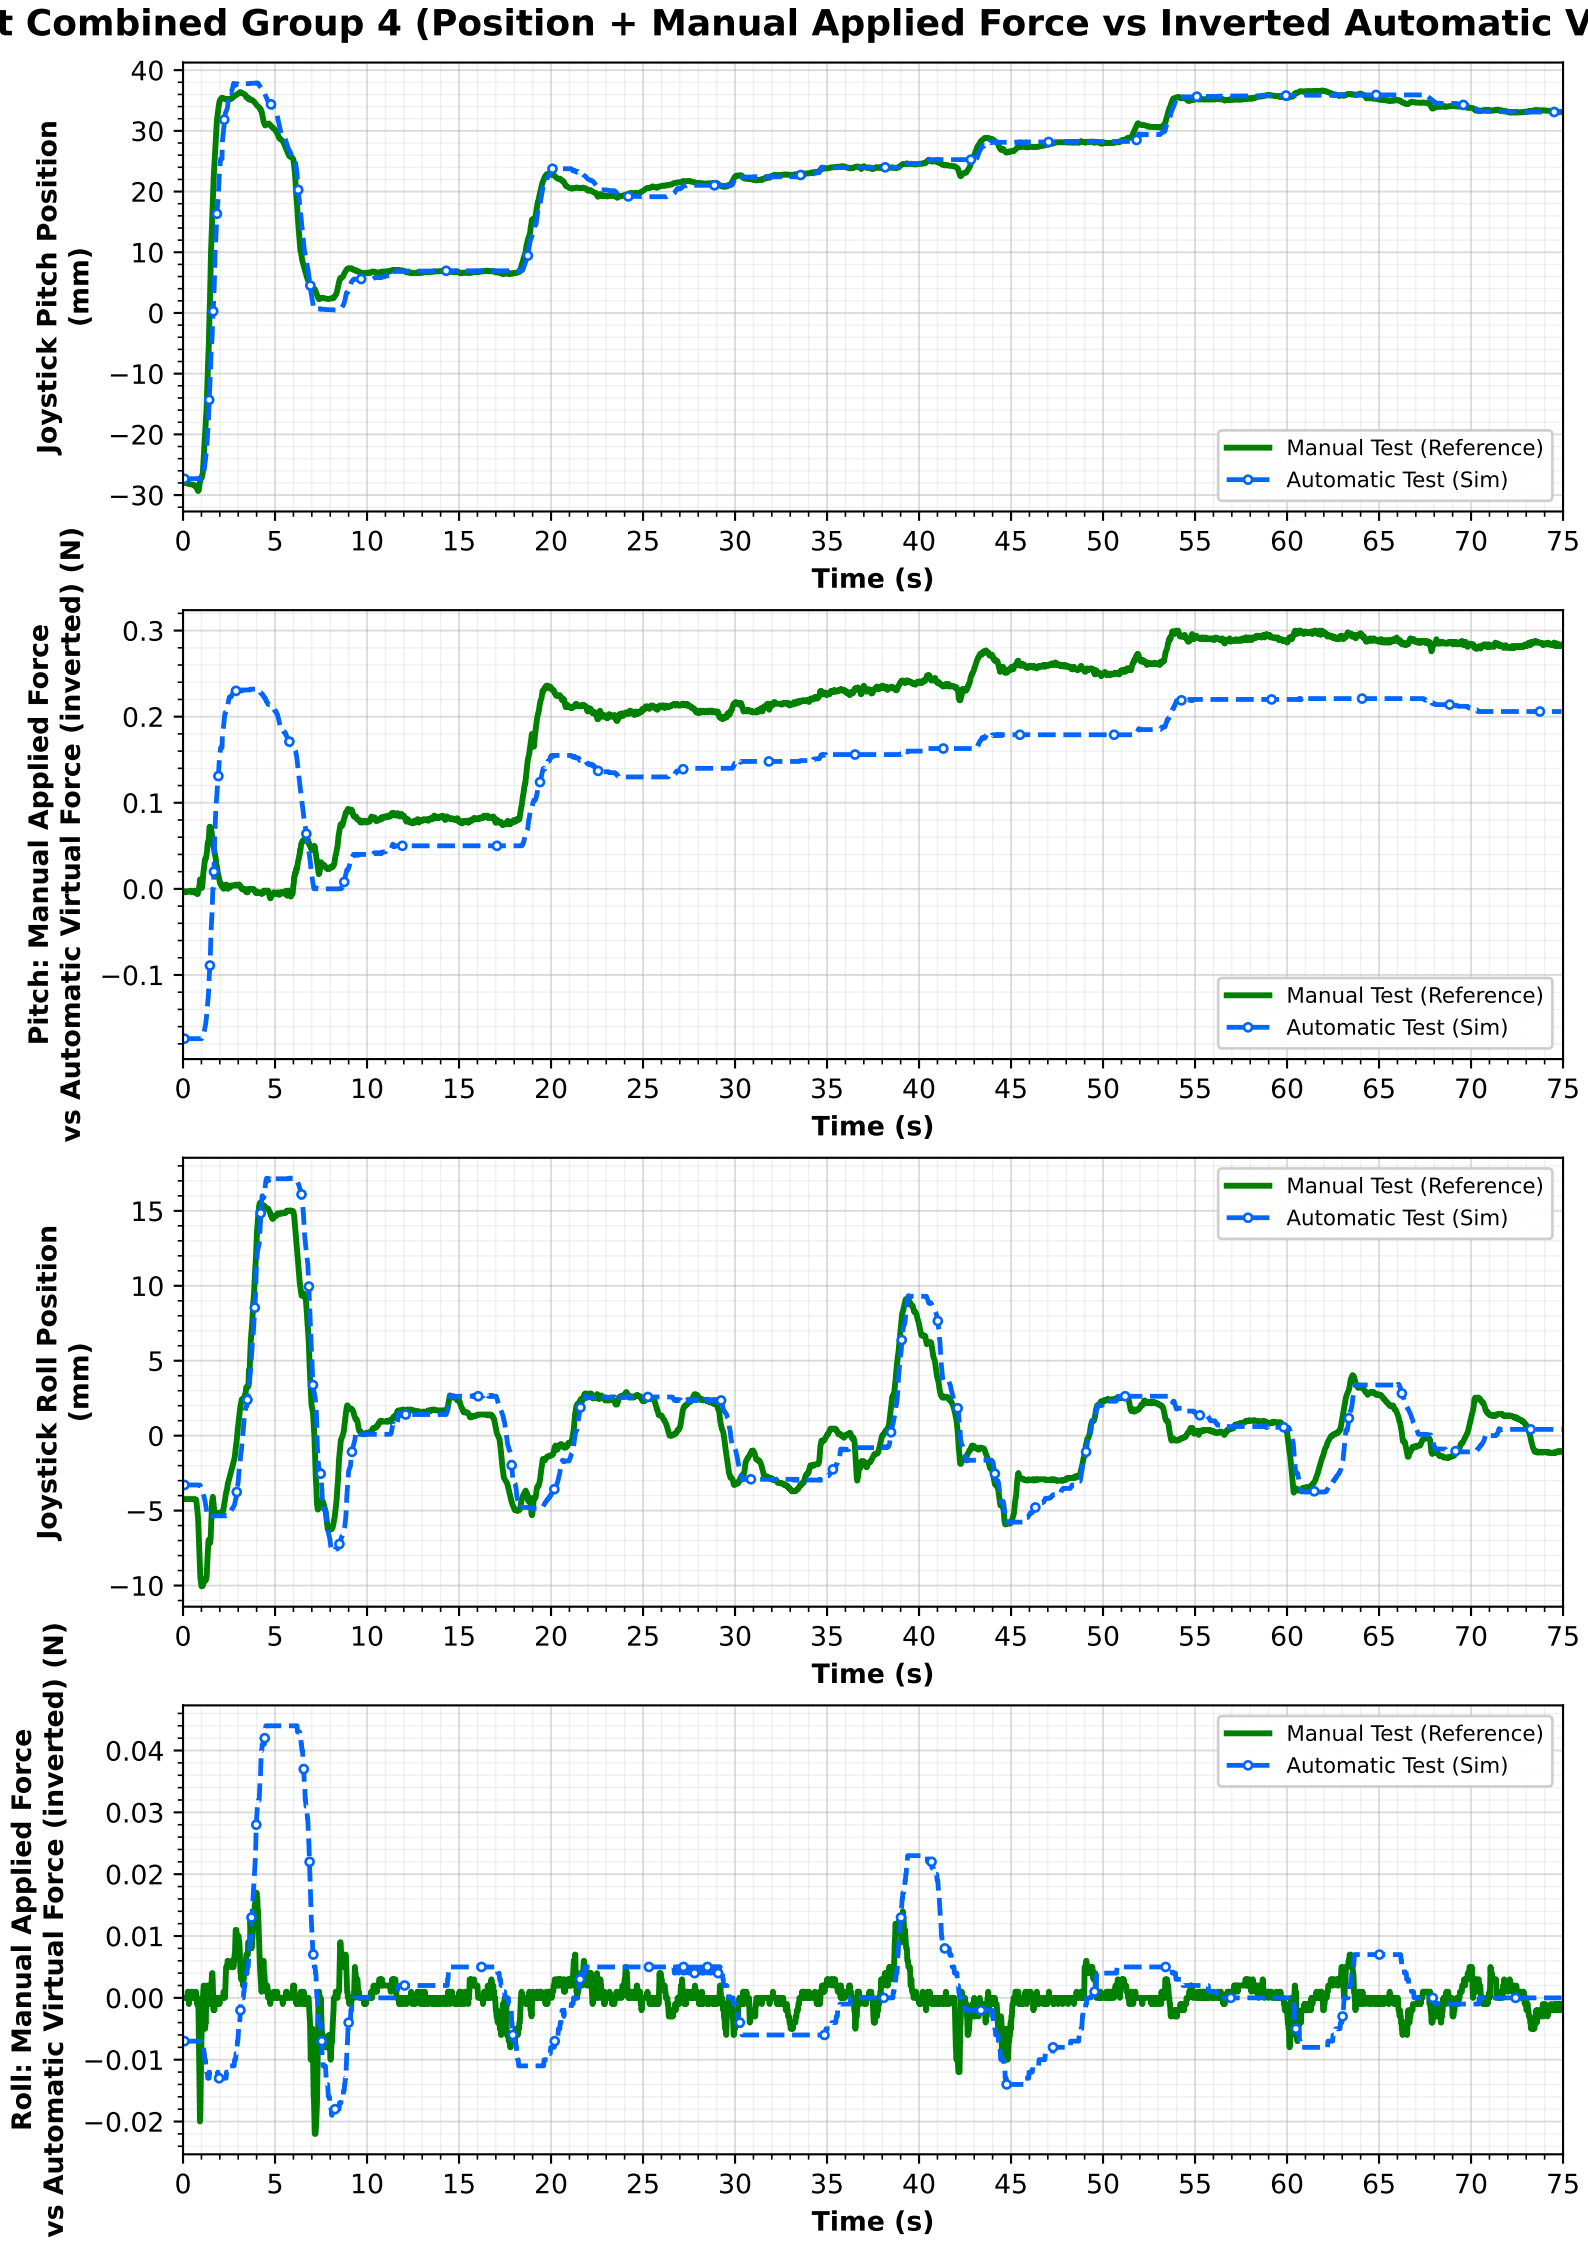
t Combined Group 4 (Position + Manual Applied Force vs Inverted Automatic V
Joystick Pitch Position (mm)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Pitch: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Joystick Roll Position (mm)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Roll: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)

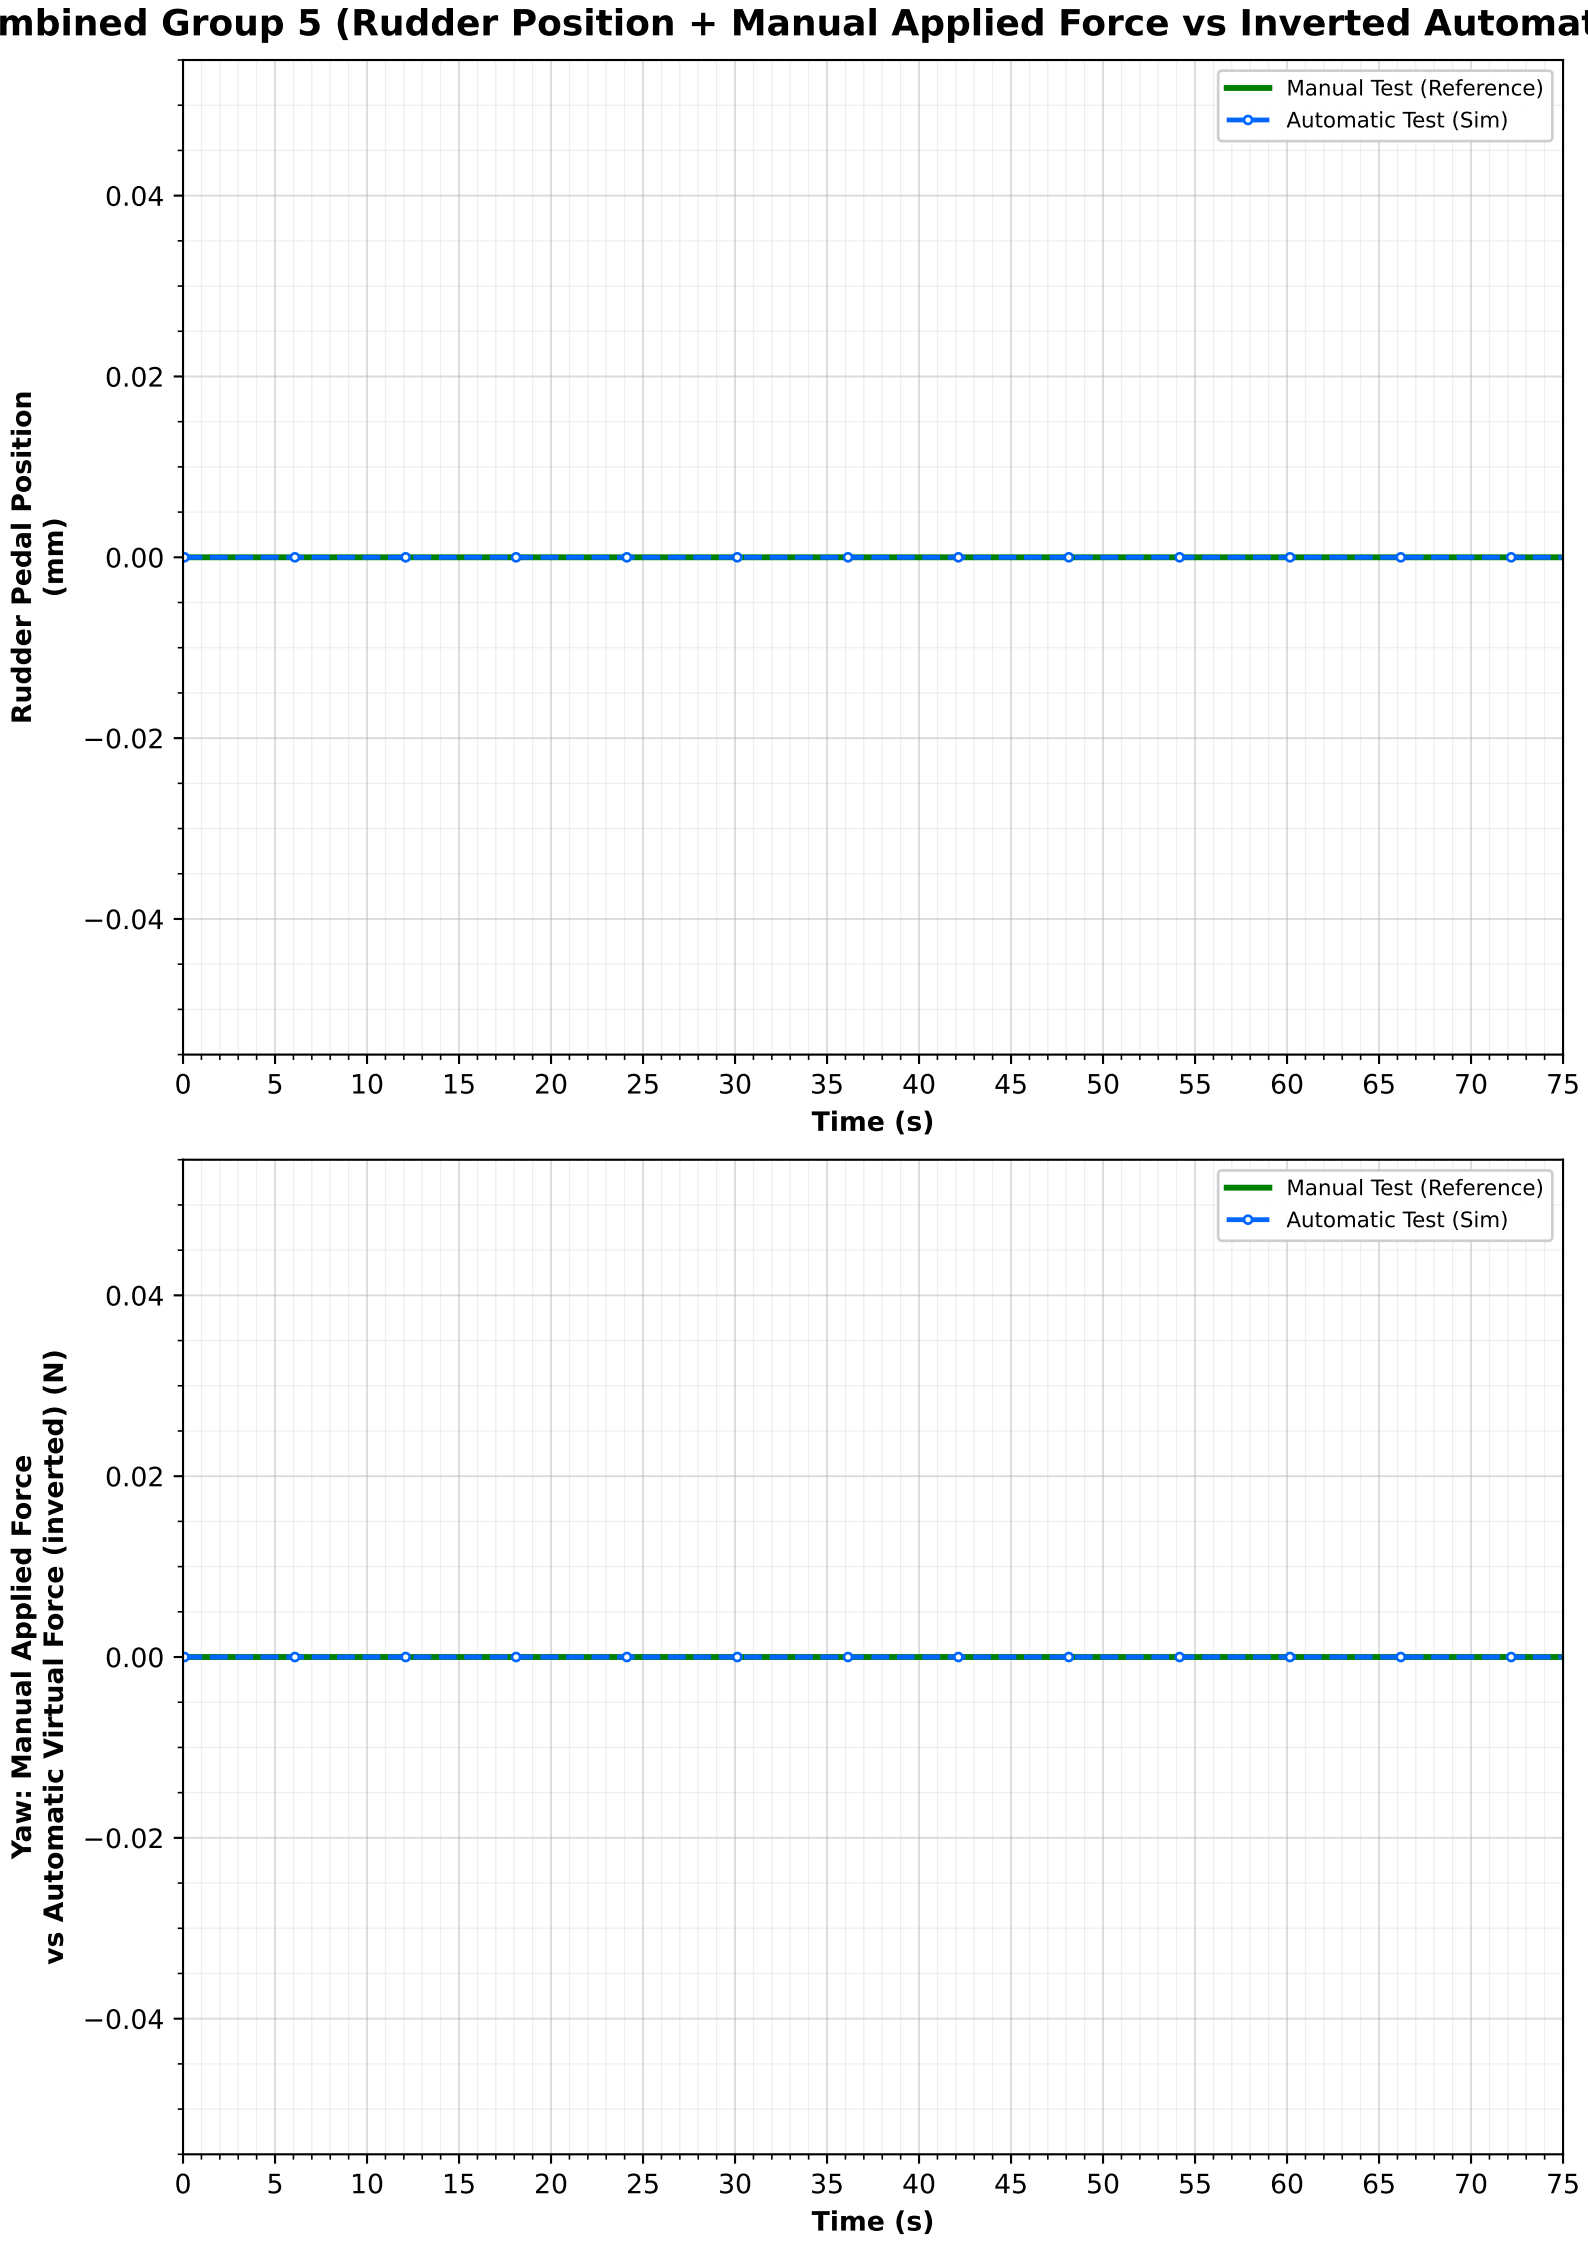
mbined Group 5 (Rudder Position + Manual Applied Force vs Inverted Automat
Manual Test (Reference)
Automatic Test (Sim)
Rudder Pedal Position (mm)
0.04
0.02
0.00
−0.02
−0.04
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)
Manual Test (Reference)
Automatic Test (Sim)
Yaw: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
0.04
0.02
0.00
−0.02
−0.04
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)