Doc Number: 161310G00000-00	Doc Version: 008	Date: 02-Nov-2026

Super Mushshak Automatic Flight Test

Prepar3D v5 | Rahwali Airfield (OPRW) | Automatic Testing Mode

Super Mushshak Logger - ver. 1.0

Super Mushshak Airborne Automatic Testing Suite

Flight Test File: Super_Mushak_auto_takeoff_data_2026-11-02_10-08-31.csv


ONLINE, AUTOMATIC

Test Date: 02-Nov-2026 Test Time: 10:08:31


Initial Test Conditions


Validation	Sim	
***** Weight and Balance *****		
847.0	847.0	Gross Wt (kg)
107.8	107.8	Total Fuel Quantity (kg)
0.00	0.00	CG Pos in X Axis (mm)
0.00	0.00	CG Pos in Y Axis (mm)
***** Control Parameters *****		
-2.58	-2.54	Pitch Control Position (raw)
-0.75	-1.31	Roll Control Position (raw)
0.00	0.00	Rudder Pedal Position (raw)
81.4	81.4	Throttle Position (%)
-0.03	-0.01	Pitch Force: Applied/Virtual (N)
-0.00	-0.00	Roll Force: Applied/Virtual (N)
0.00	-0.00	Yaw Force: Applied/Virtual (N)
***** Environment Parameters *****		
1013	1013	Baro Press (hPa)
10.8	10.7	OAT (deg C)
324.4	324.4	Wind Dir (mag,deg)
7.90	8.00	Wind Spd (kt)
***** Engine Parameters (Piston Engine) *****		
2700	2594	Engine Speed (RPM)
81.4	81.4	Throttle Position (%)
0.00	0.00	Fuel Flow (pph)
508.1	496.2	Exhaust Gas Temp (deg C)


Validation	Sim	
***** Flight Parameters *****		
101.0	100.8	Indicated Airspeed (kt)
104.1	104.8	Ground Speed (kt)
0.16	0.16	Mach Number (-)
2901	2901	Pressure Alt (ft)
2156	2156	Radar Alt (ft)
750.0	750.0	Height of Terrain (ft)
238.7	805.4	Vertical Velocity (ft/min)
-5.29	-5.30	Pitch Angle (deg)
-1.37	-1.38	Bank Angle (deg)
43.6	43.6	Heading (deg)
2.06	0.02	Aircraft Angle of Attack (deg)
-0.07	-0.01	Sideslip Angle (deg)
48.2	60.2	Track Angle (deg)
0.23	0.37	Roll Rate (deg/s)
-1.11	-0.62	Pitch Rate (deg/s)
-0.26	-0.26	Yaw Rate (deg/s)
0.02	0.03	X Body Acceleration (g)
-0.05	-12.1	Y Body Acceleration (g)
-1.75	-3.07	Z Body Acceleration (g)

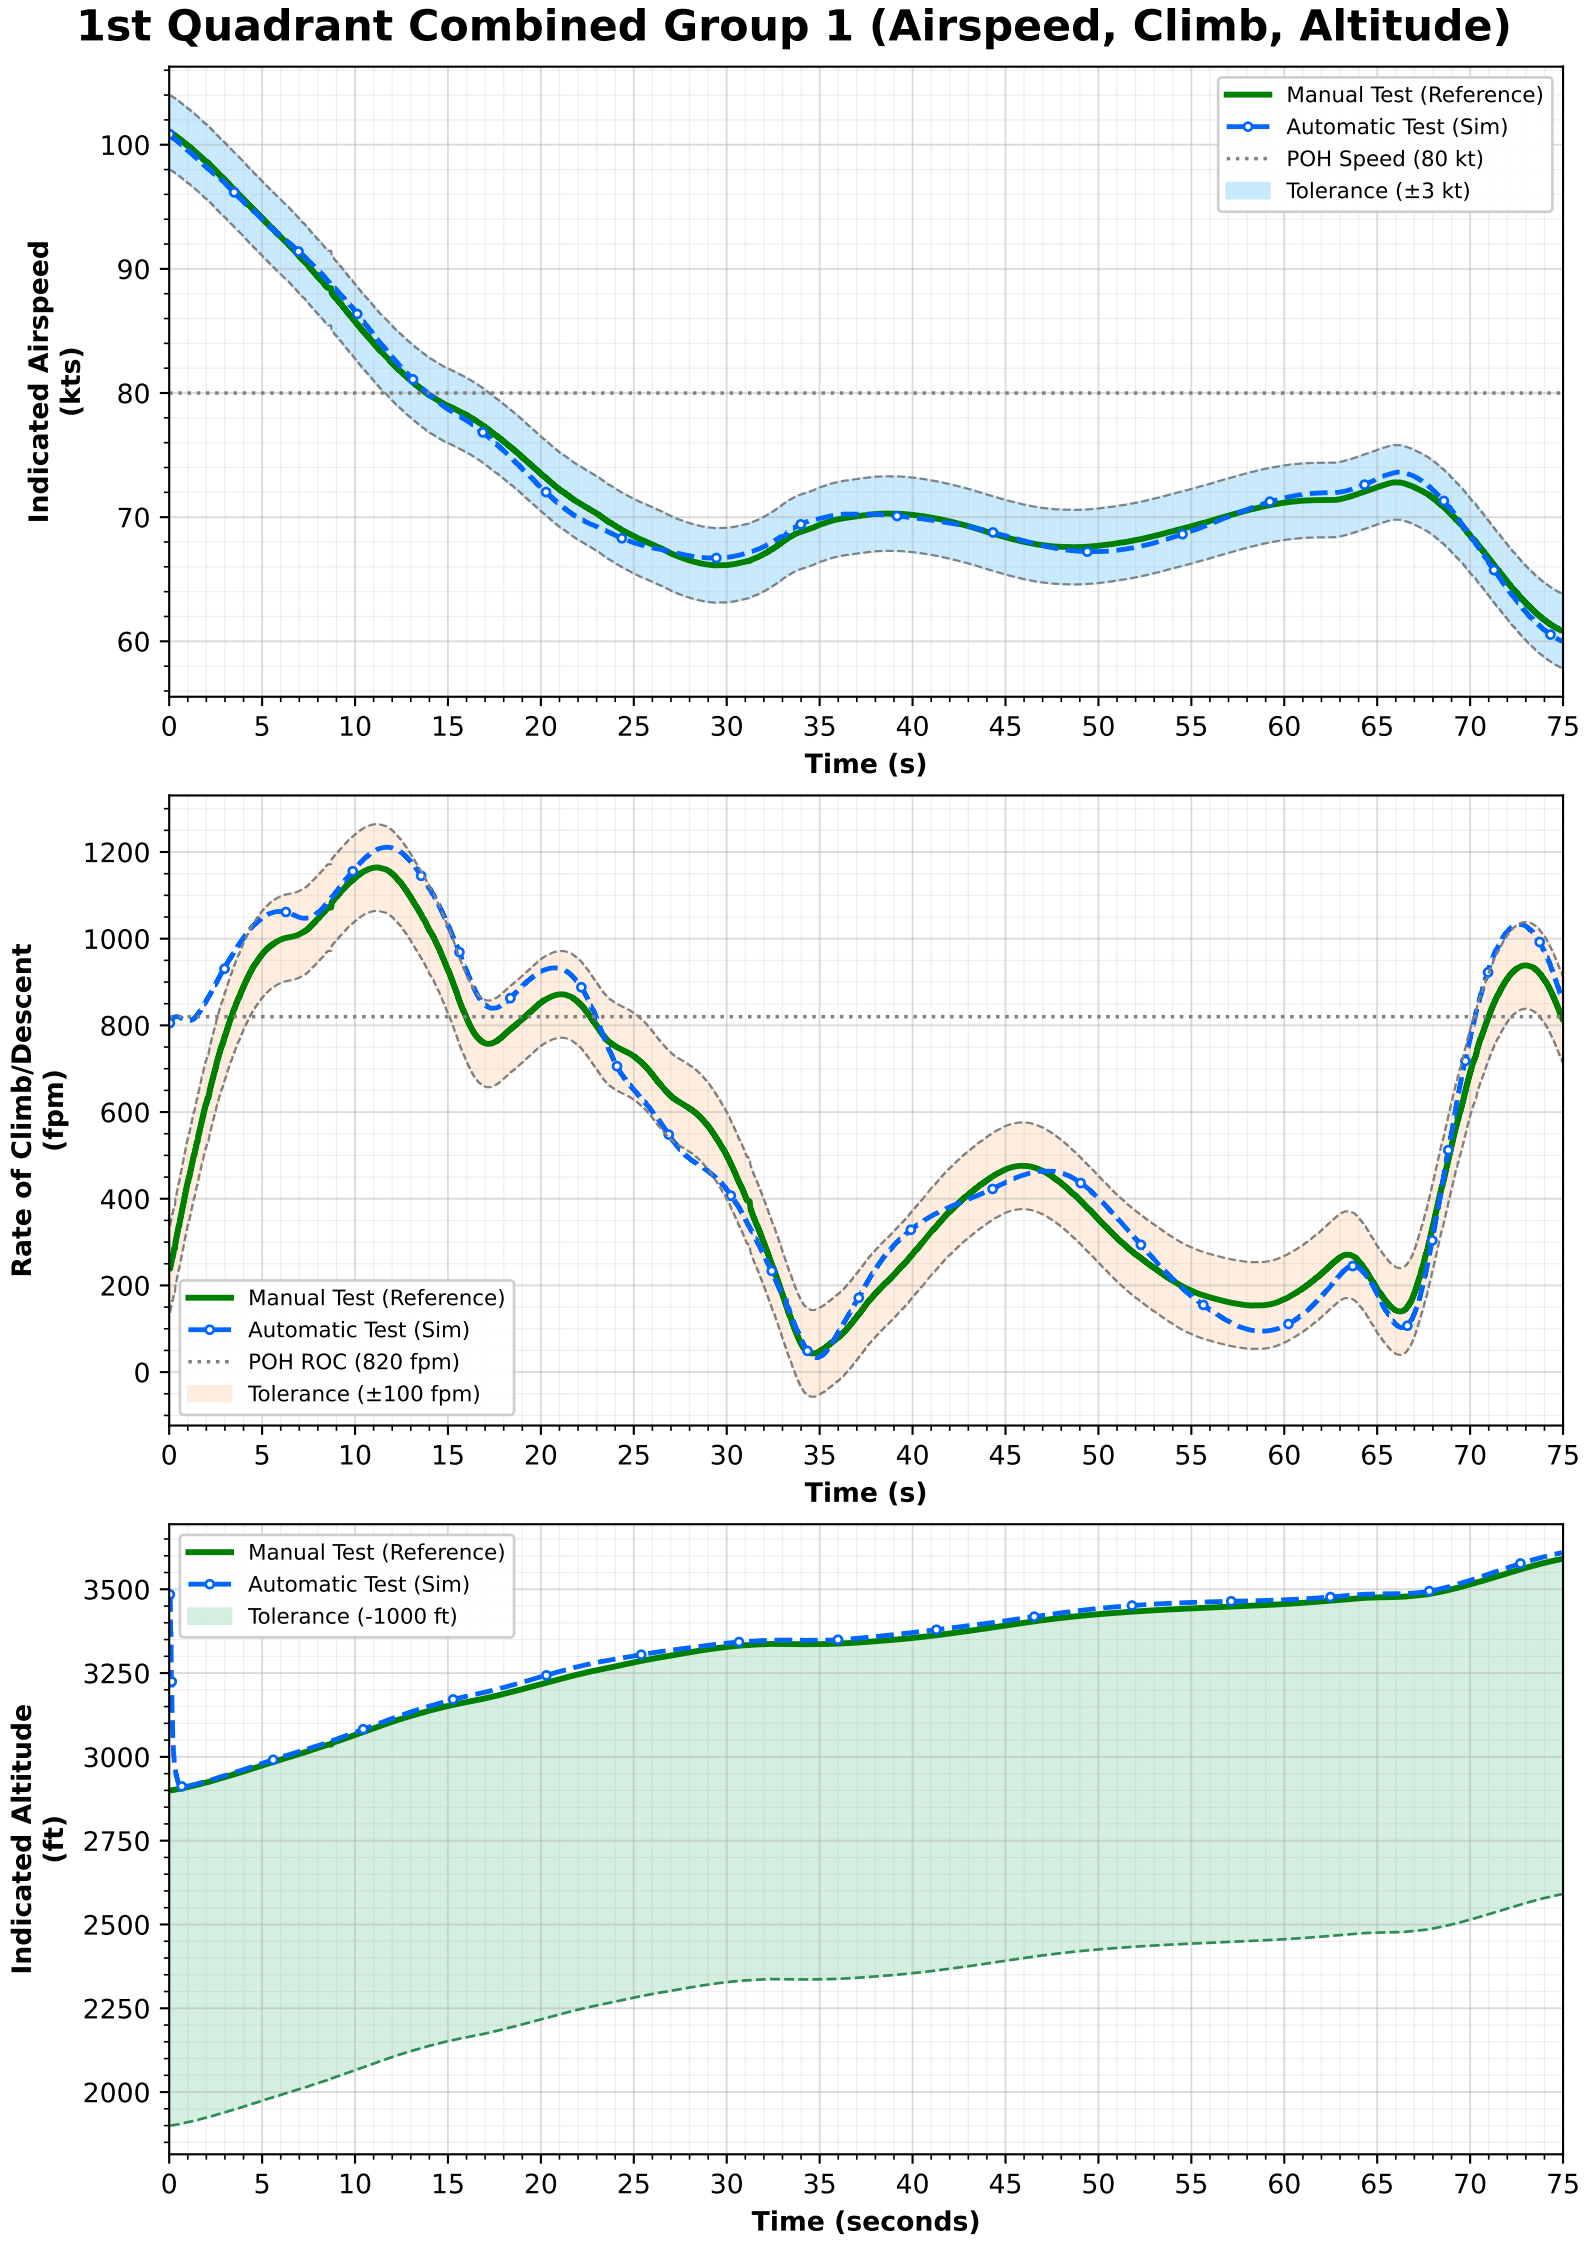

1st Quadrant Combined Group 1 (Airspeed, Climb, Altitude)
Manual Test (Reference)
Automatic Test (Sim)
POH Speed (80 kt)
Tolerance (±3 kt)
Indicated Airspeed (kts)
Time (s)
Manual Test (Reference)
Automatic Test (Sim)
POH ROC (820 fpm)
Tolerance (±100 fpm)
Rate of Climb/Descent (fpm)
Time (s)
Manual Test (Reference)
Automatic Test (Sim)
Tolerance (-1000 ft)
Indicated Altitude (ft)
Time (seconds)


1st Quadrant Combined Group 2 (Pitch, Bank, Yaw, Heading)

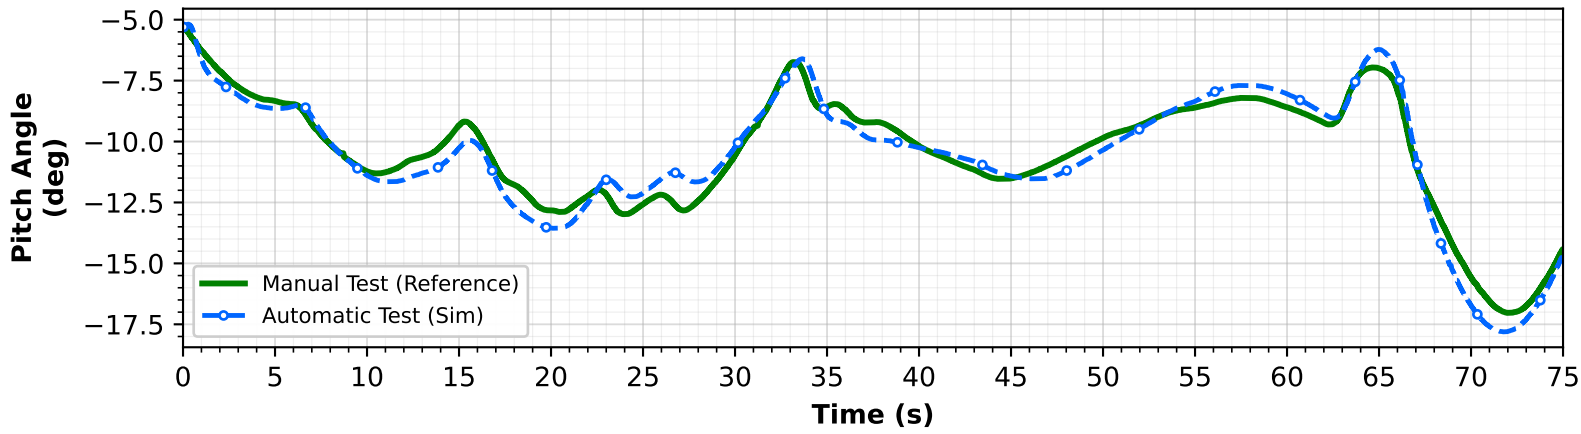

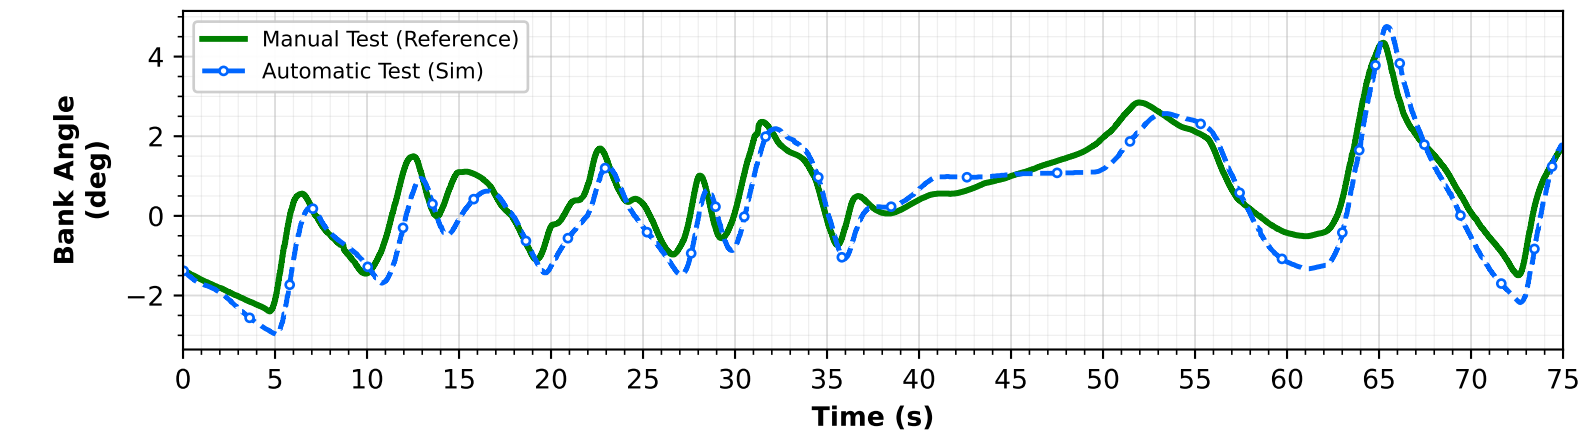


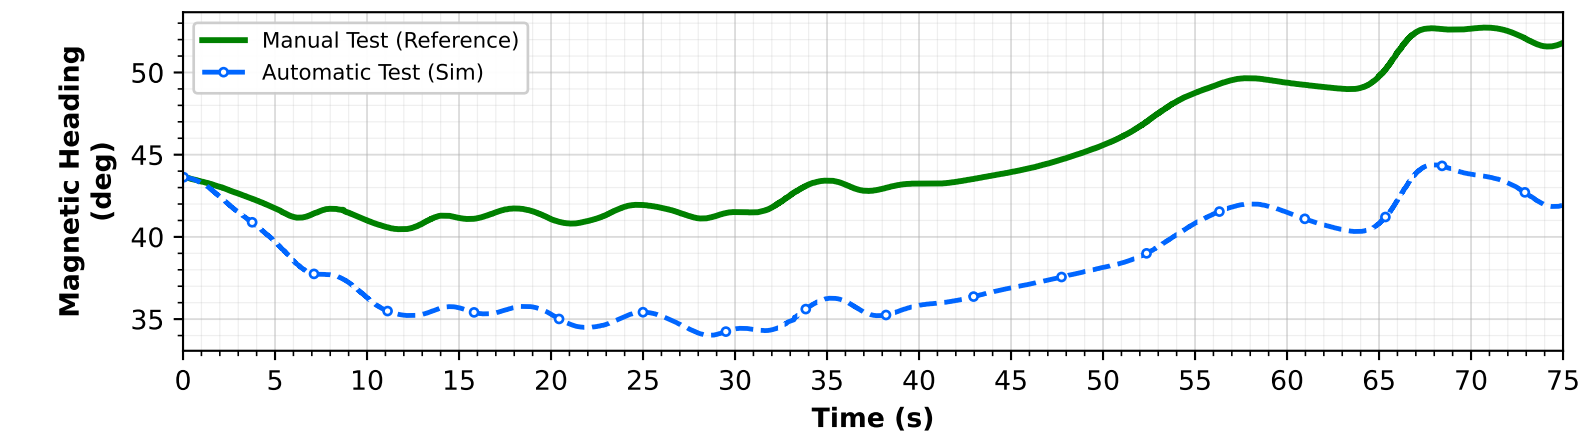


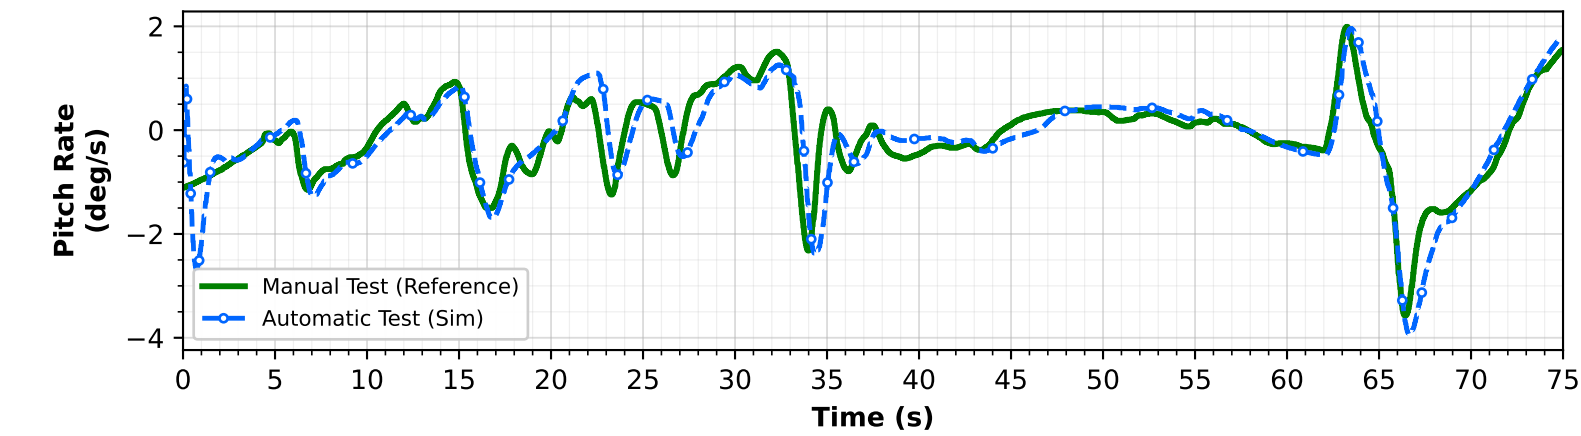


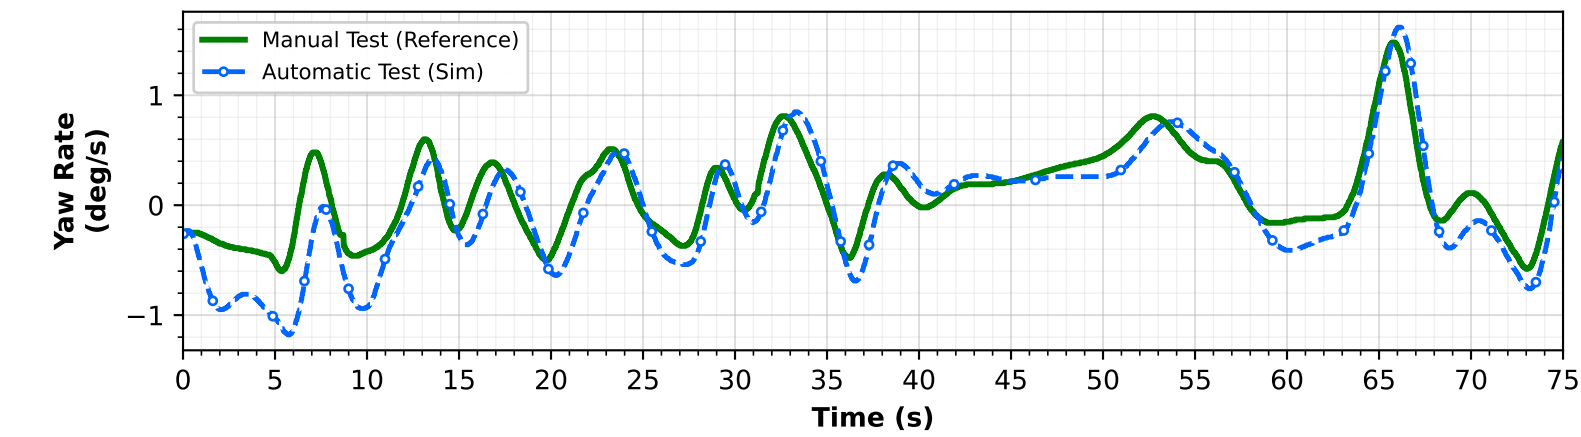



1st Quadrant Combined Group 3 (Propeller, Engine, Throttle)

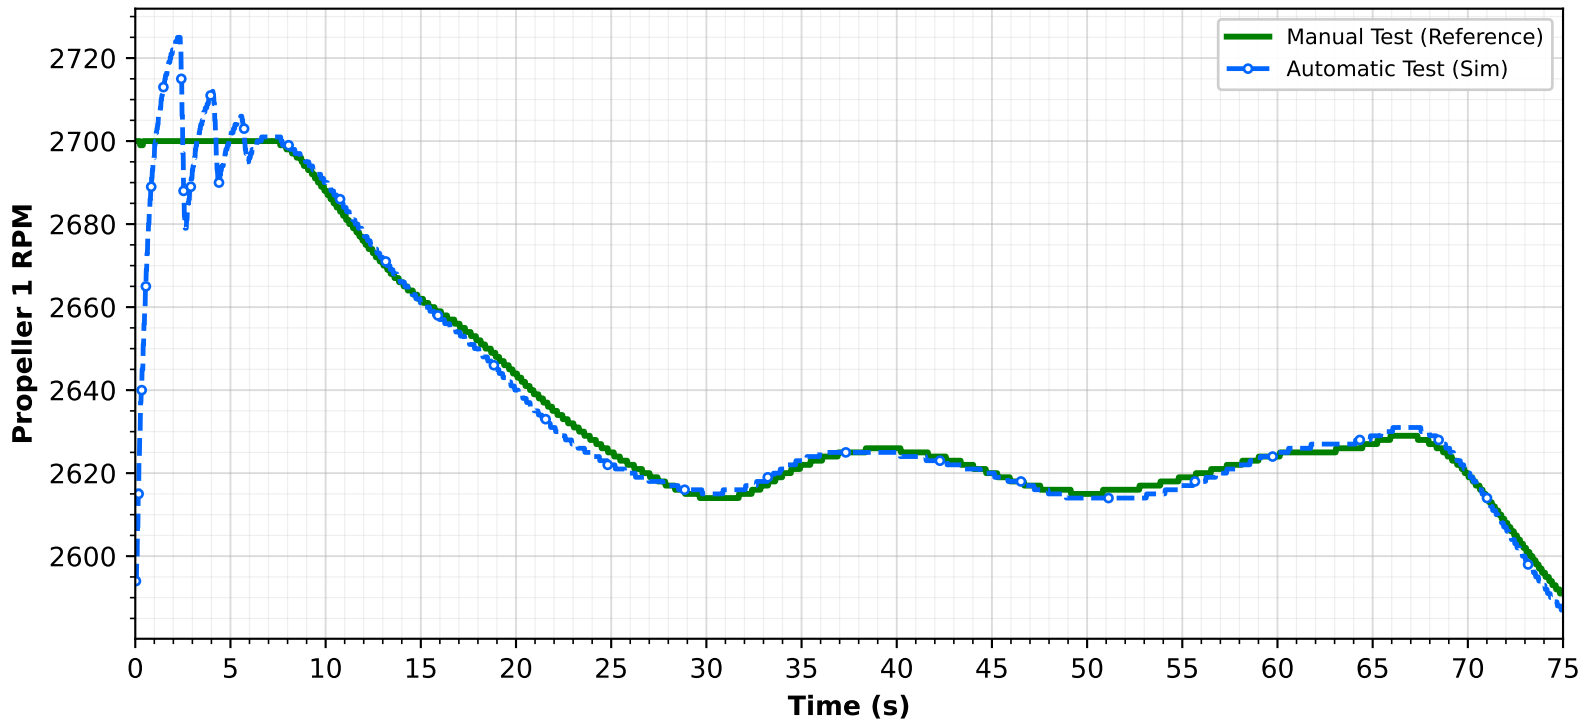

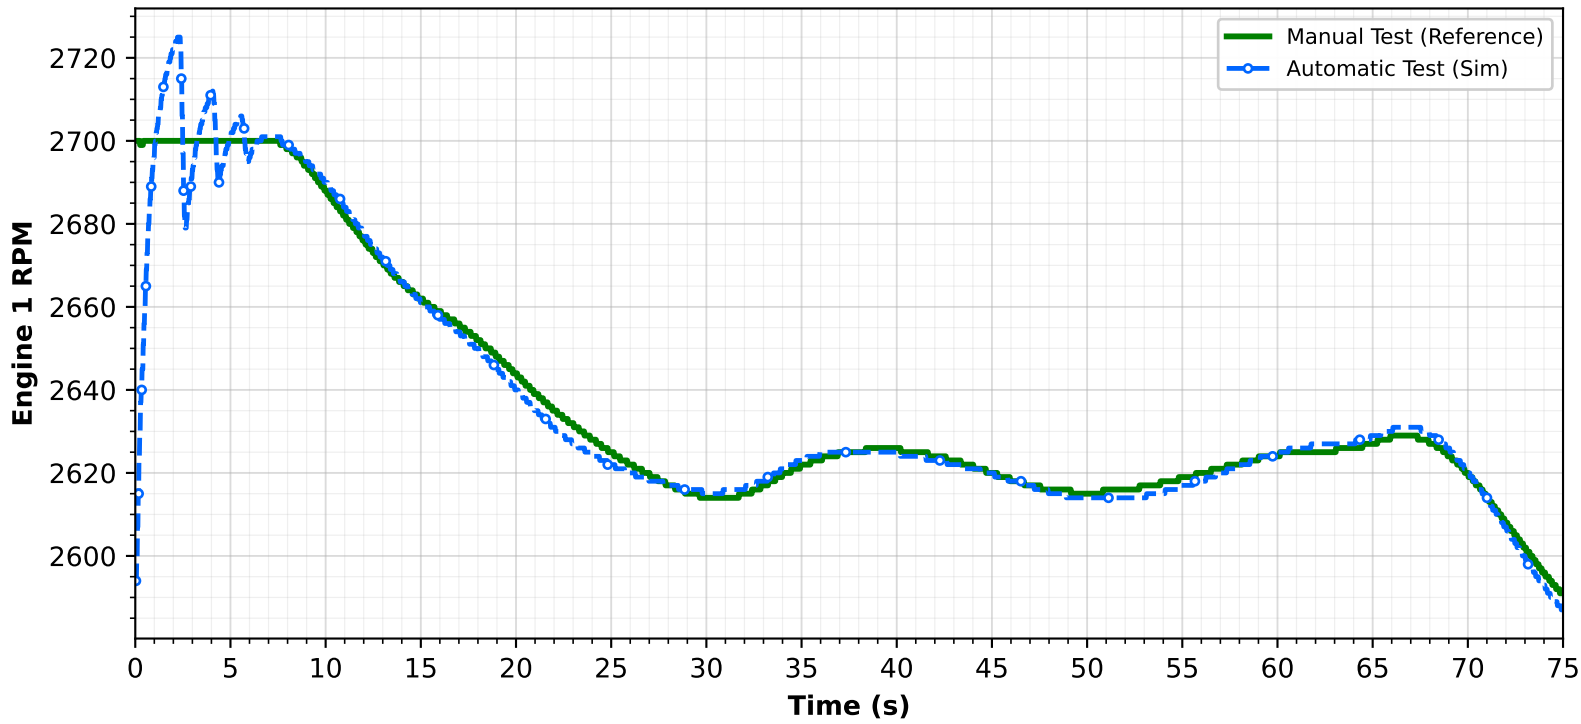

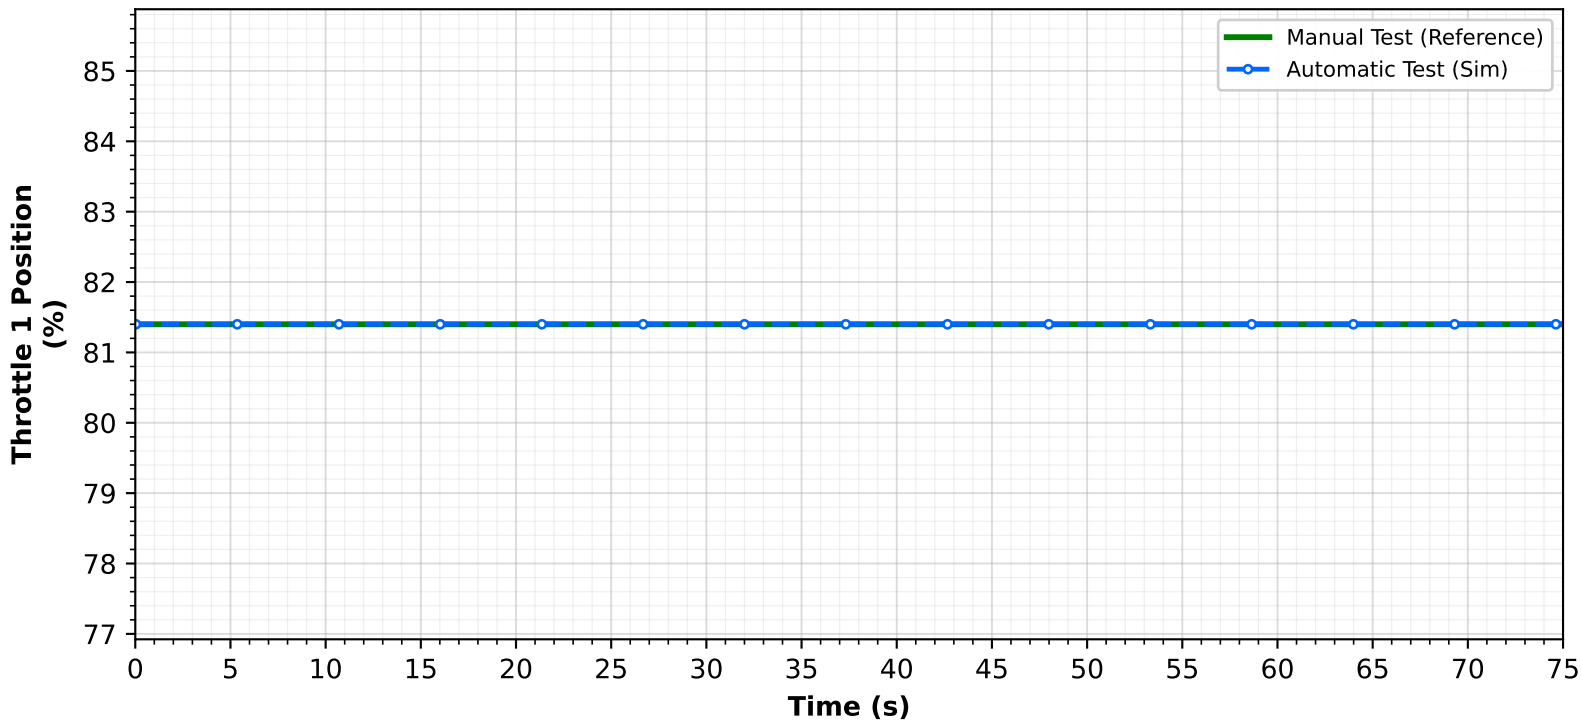

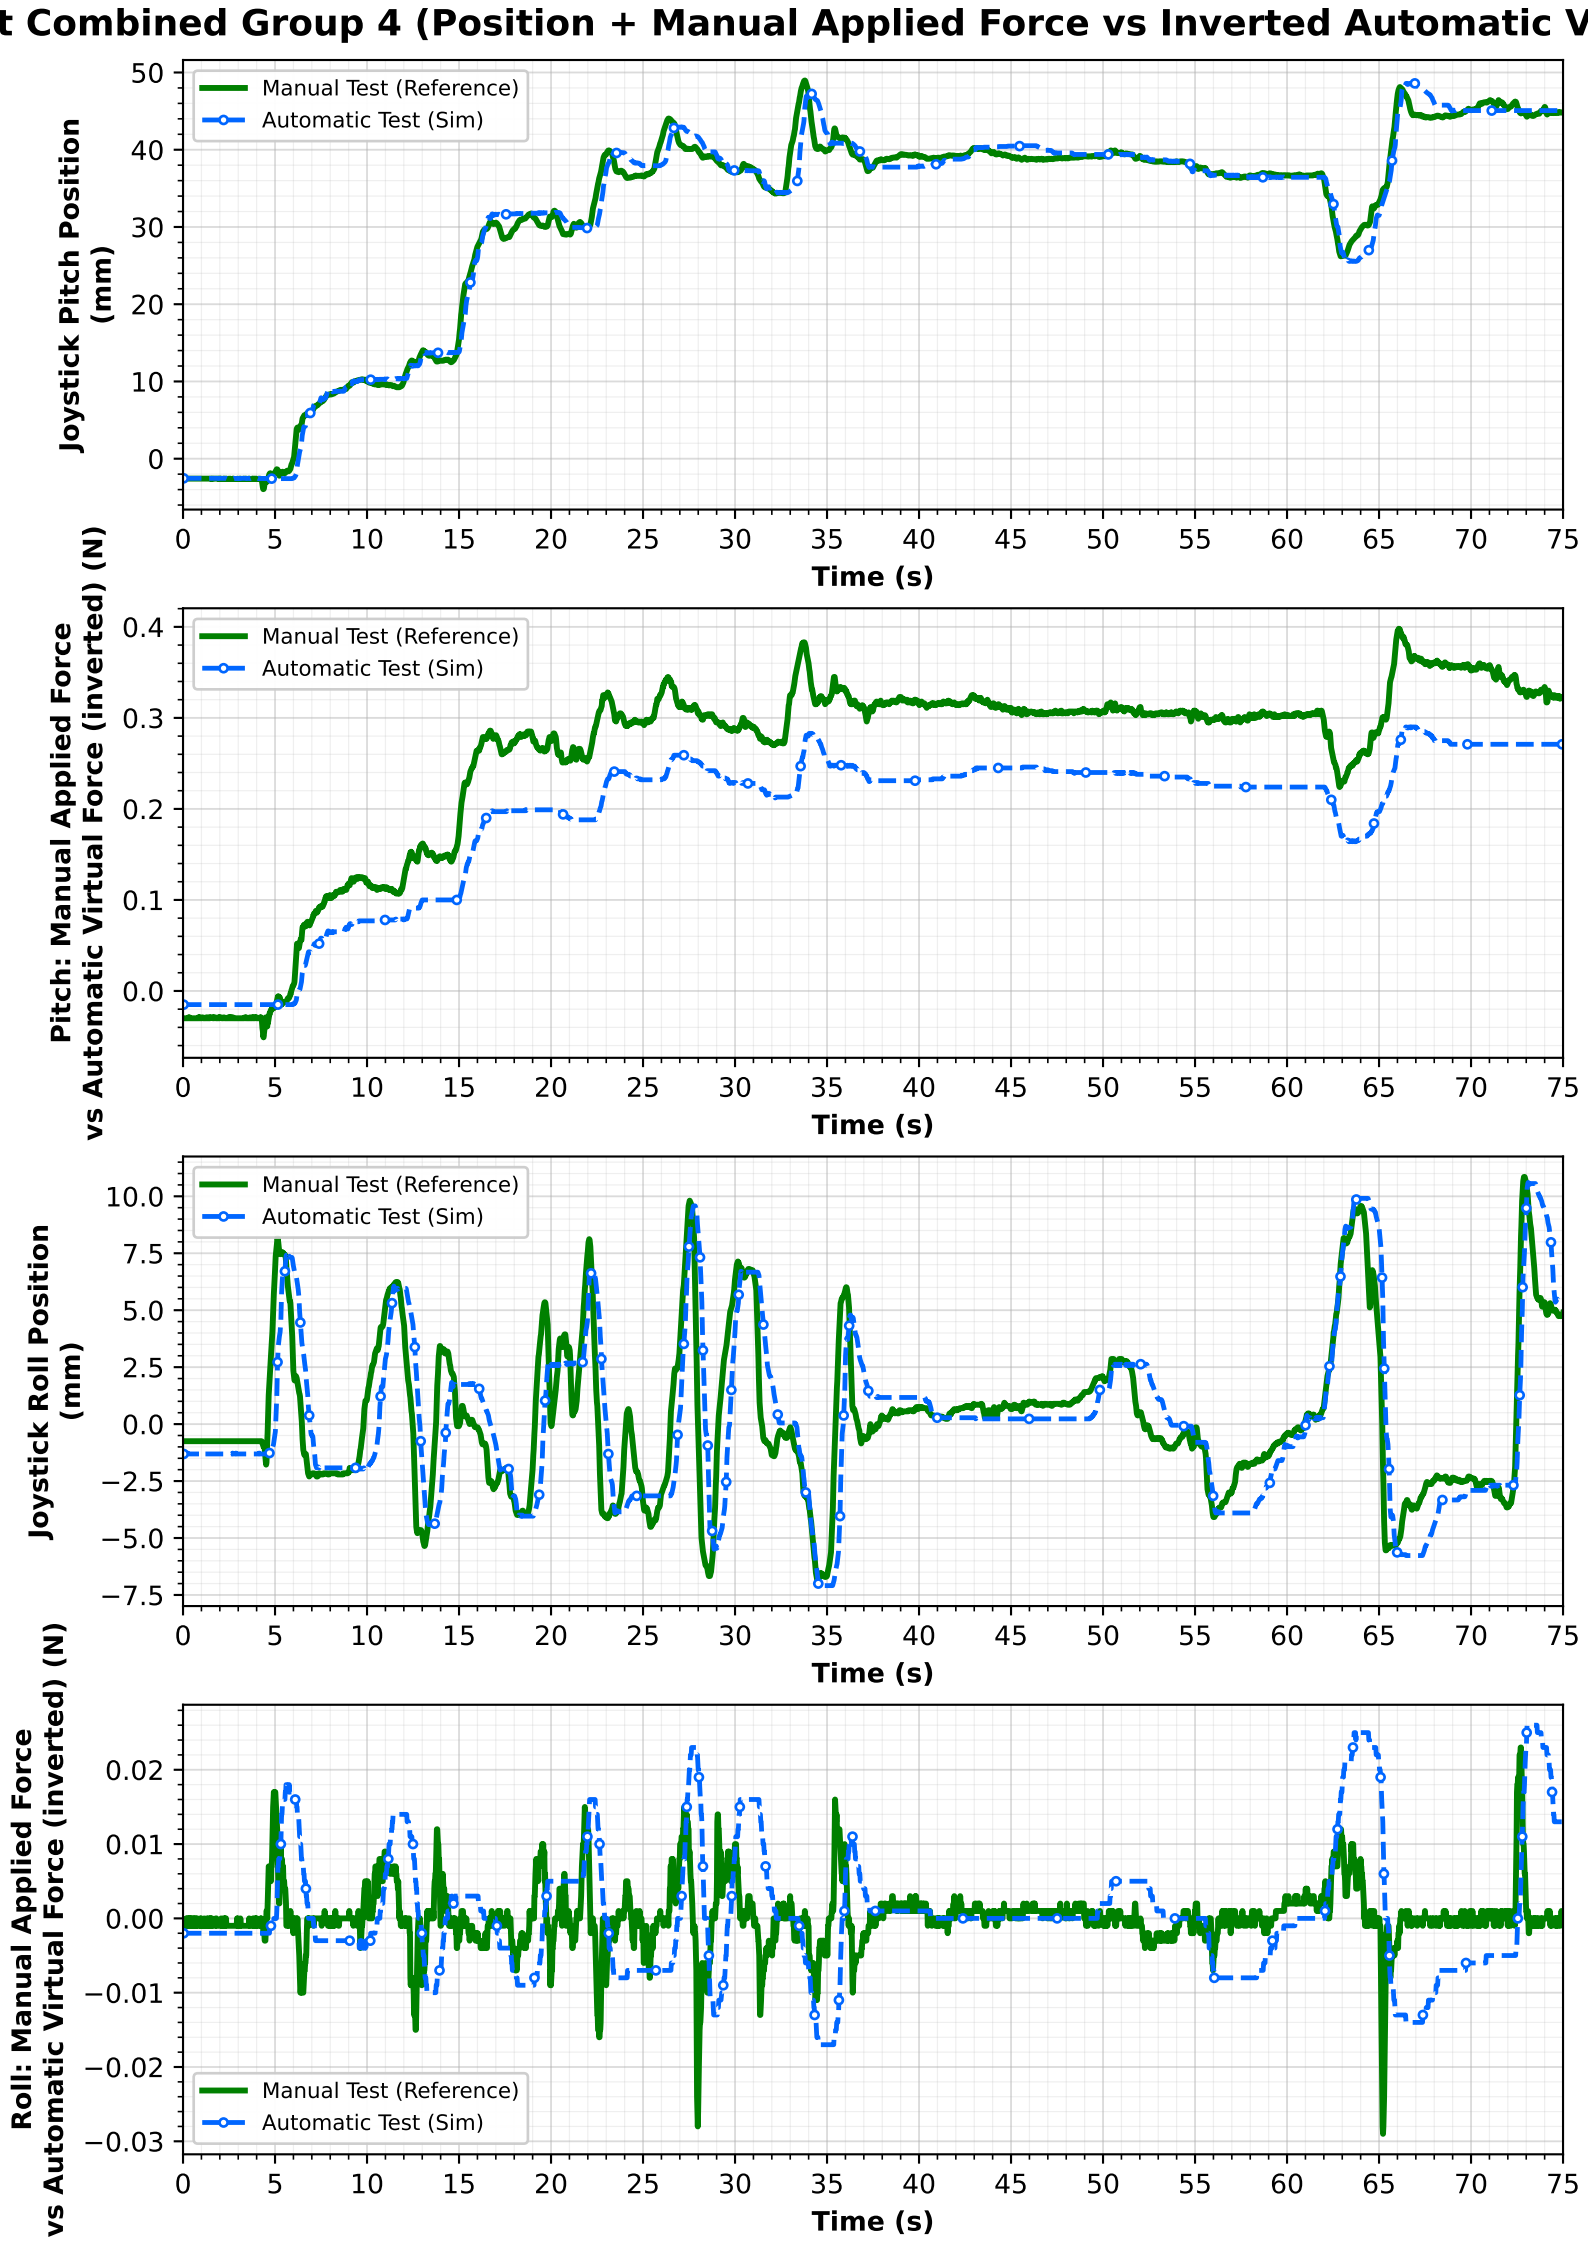
t Combined Group 4 (Position + Manual Applied Force vs Inverted Automatic V
Manual Test (Reference)
Automatic Test (Sim)
Joystick Pitch Position (mm)
Time (s)
Pitch: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
Joystick Roll Position (mm)
Roll: Manual Applied Force vs Automatic Virtual Force (inverted) (N)

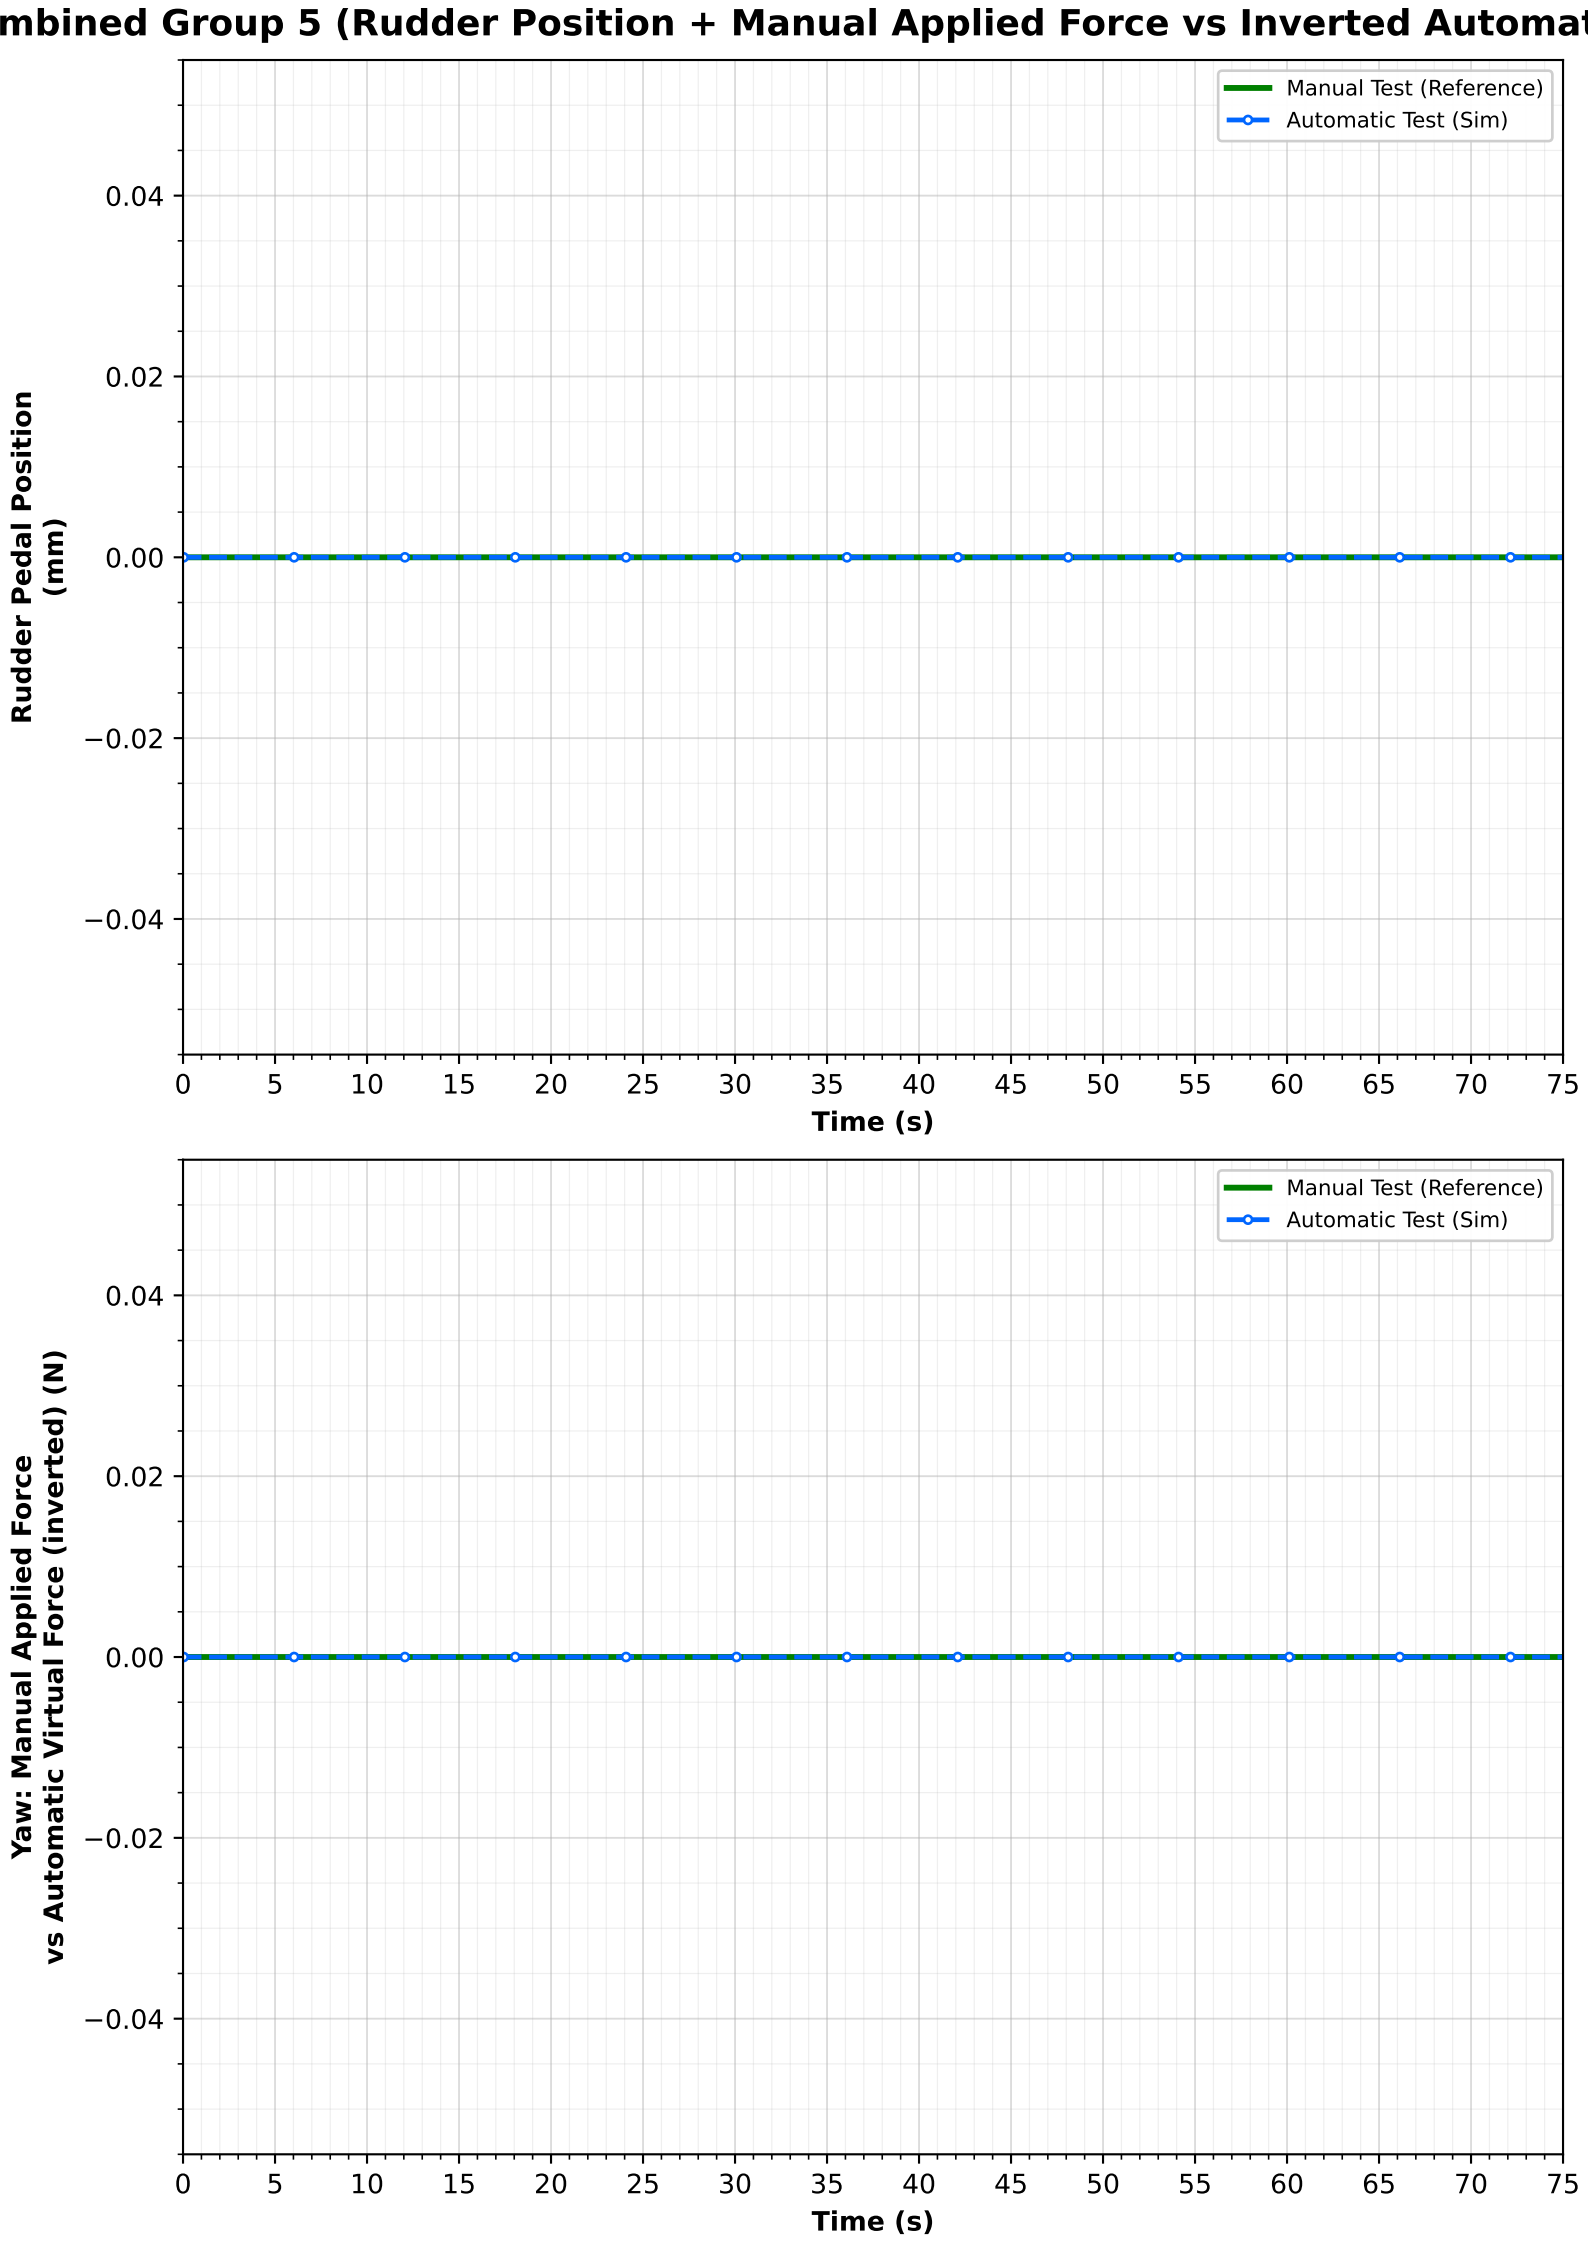
mbined Group 5 (Rudder Position + Manual Applied Force vs Inverted Automat
Manual Test (Reference)
Automatic Test (Sim)
Rudder Pedal Position (mm)
0.04
0.02
0.00
−0.02
−0.04
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)
Manual Test (Reference)
Automatic Test (Sim)
Yaw: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
0.04
0.02
0.00
−0.02
−0.04
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)