Doc Number: 161310G00000-00	Doc Version: 008	Date: 02-Nov-2026

Super Mushshak Automatic Flight Test

Prepar3D v5 | Rahwali Airfield (OPRW) | Automatic Testing Mode

Super Mushshak Logger - ver. 1.0

Super Mushshak Airborne Automatic Testing Suite

Flight Test File: Super_Mushak_auto_takeoff_data_2026-11-02_12-57-05.csv

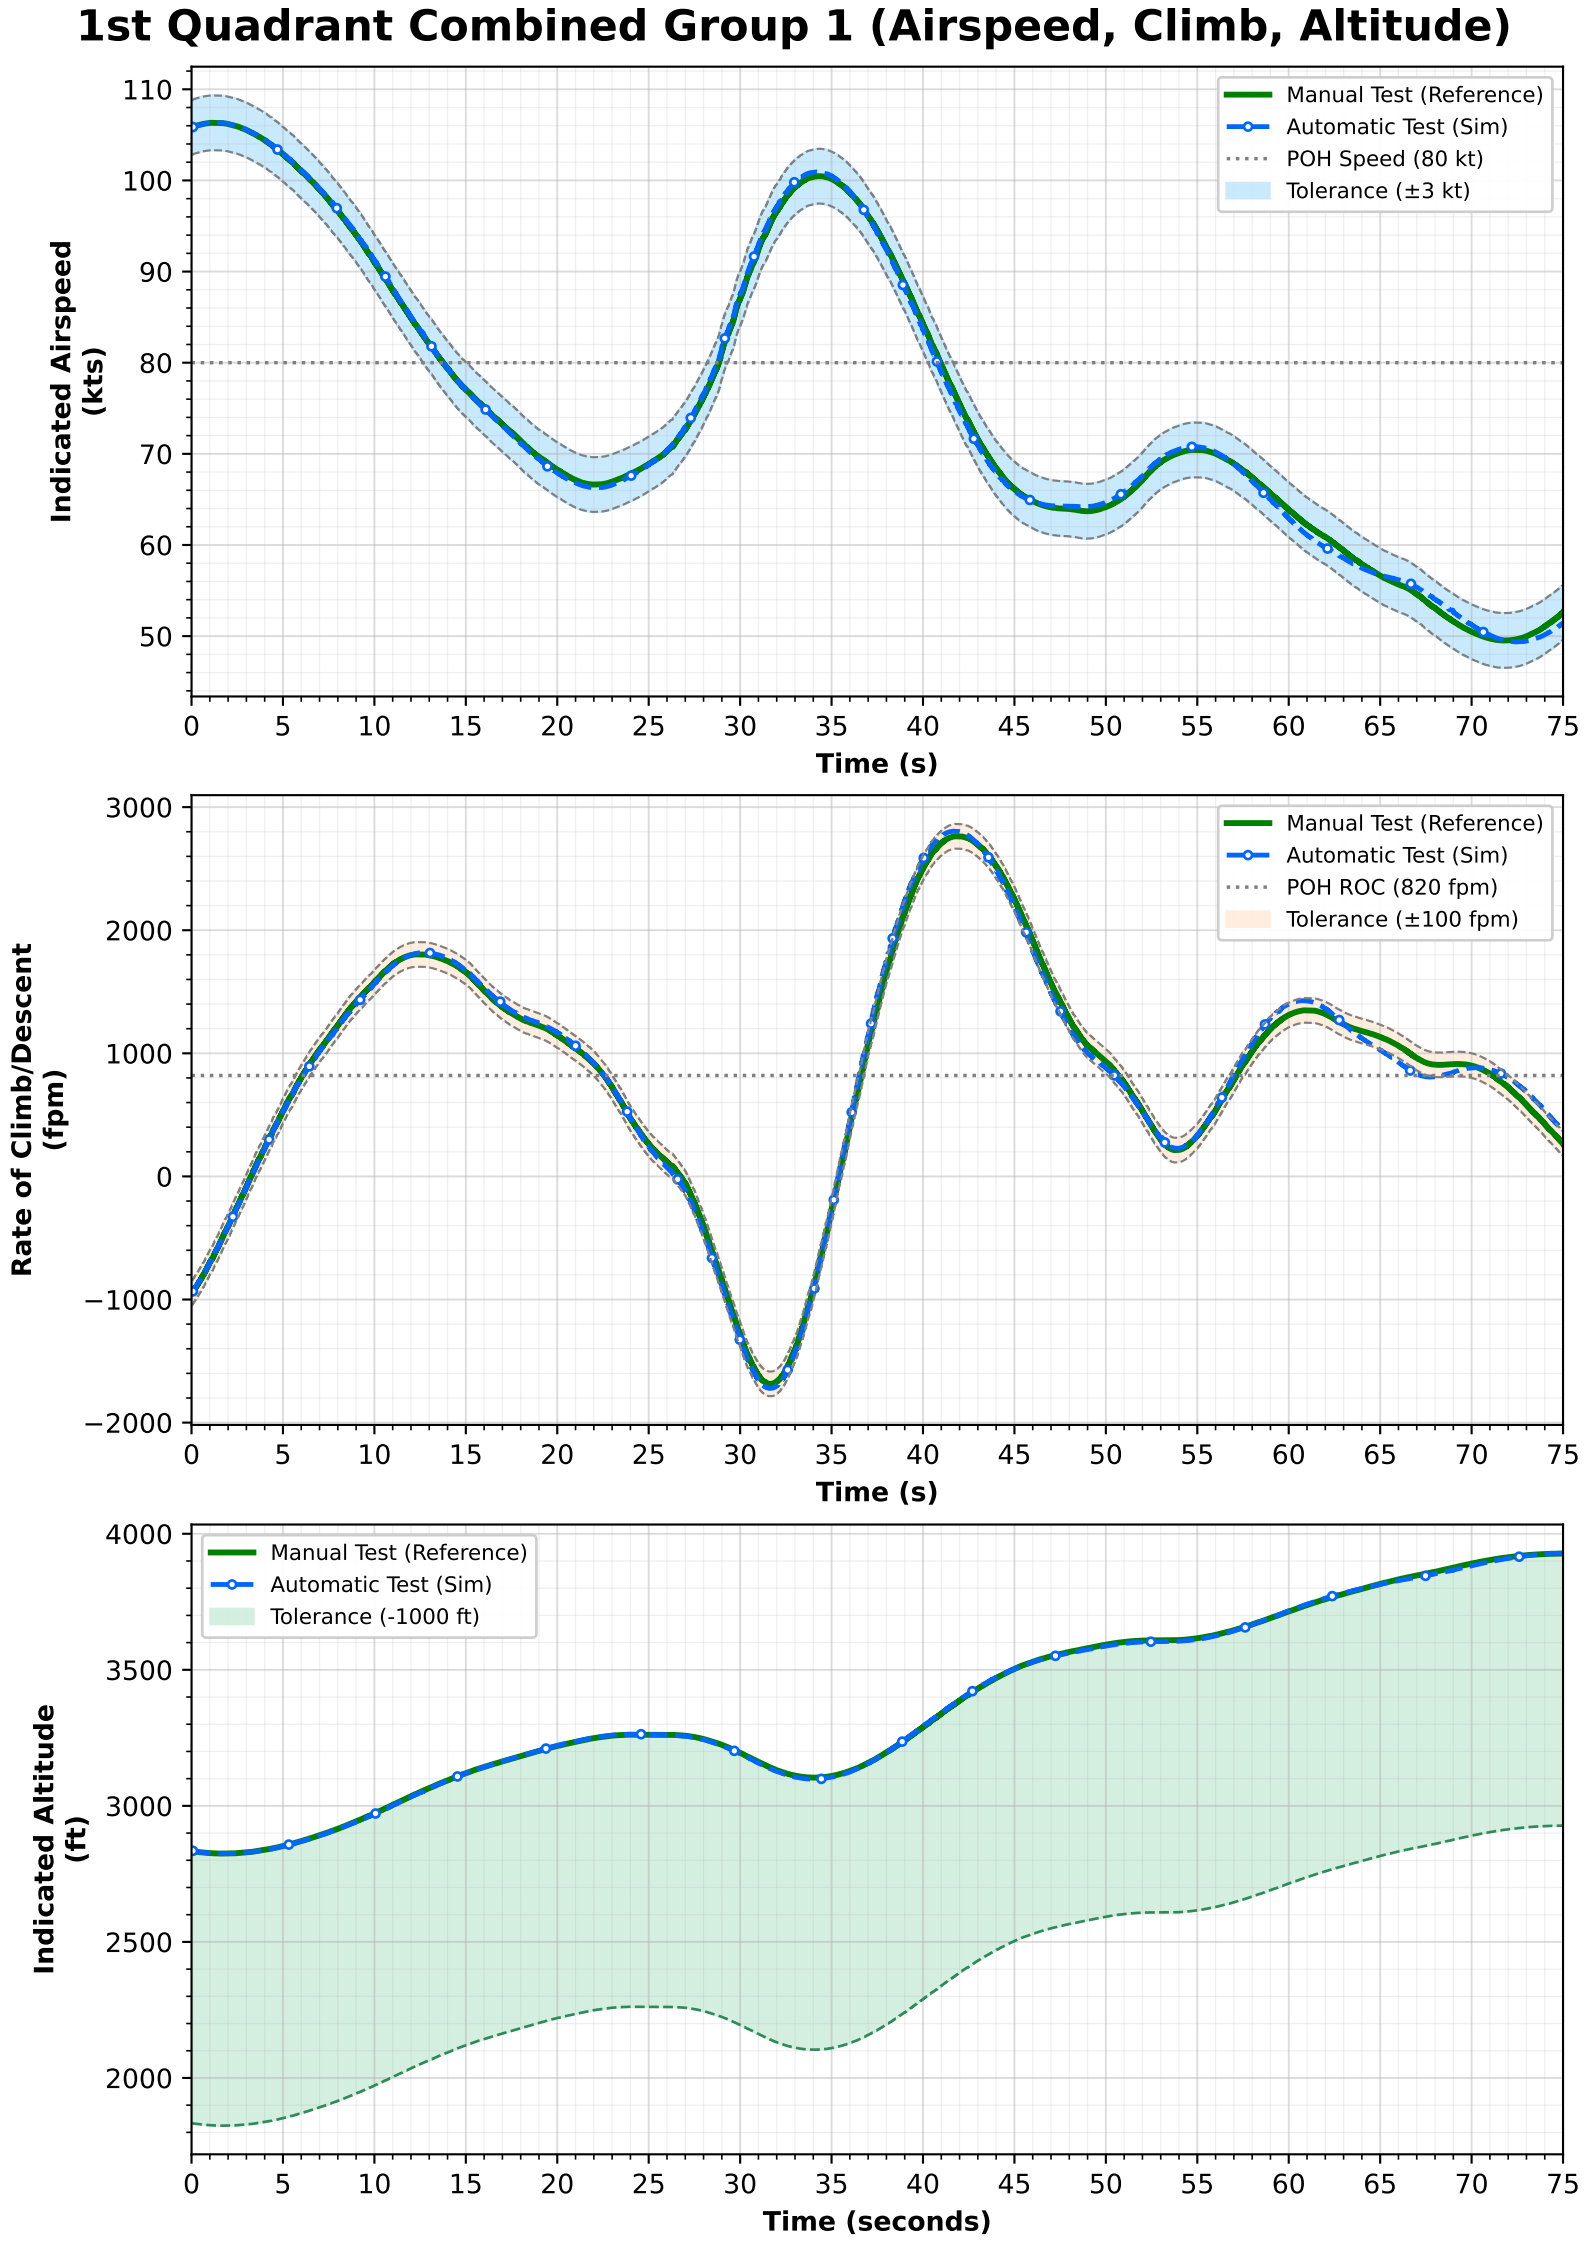
ONLINE, AUTOMATIC

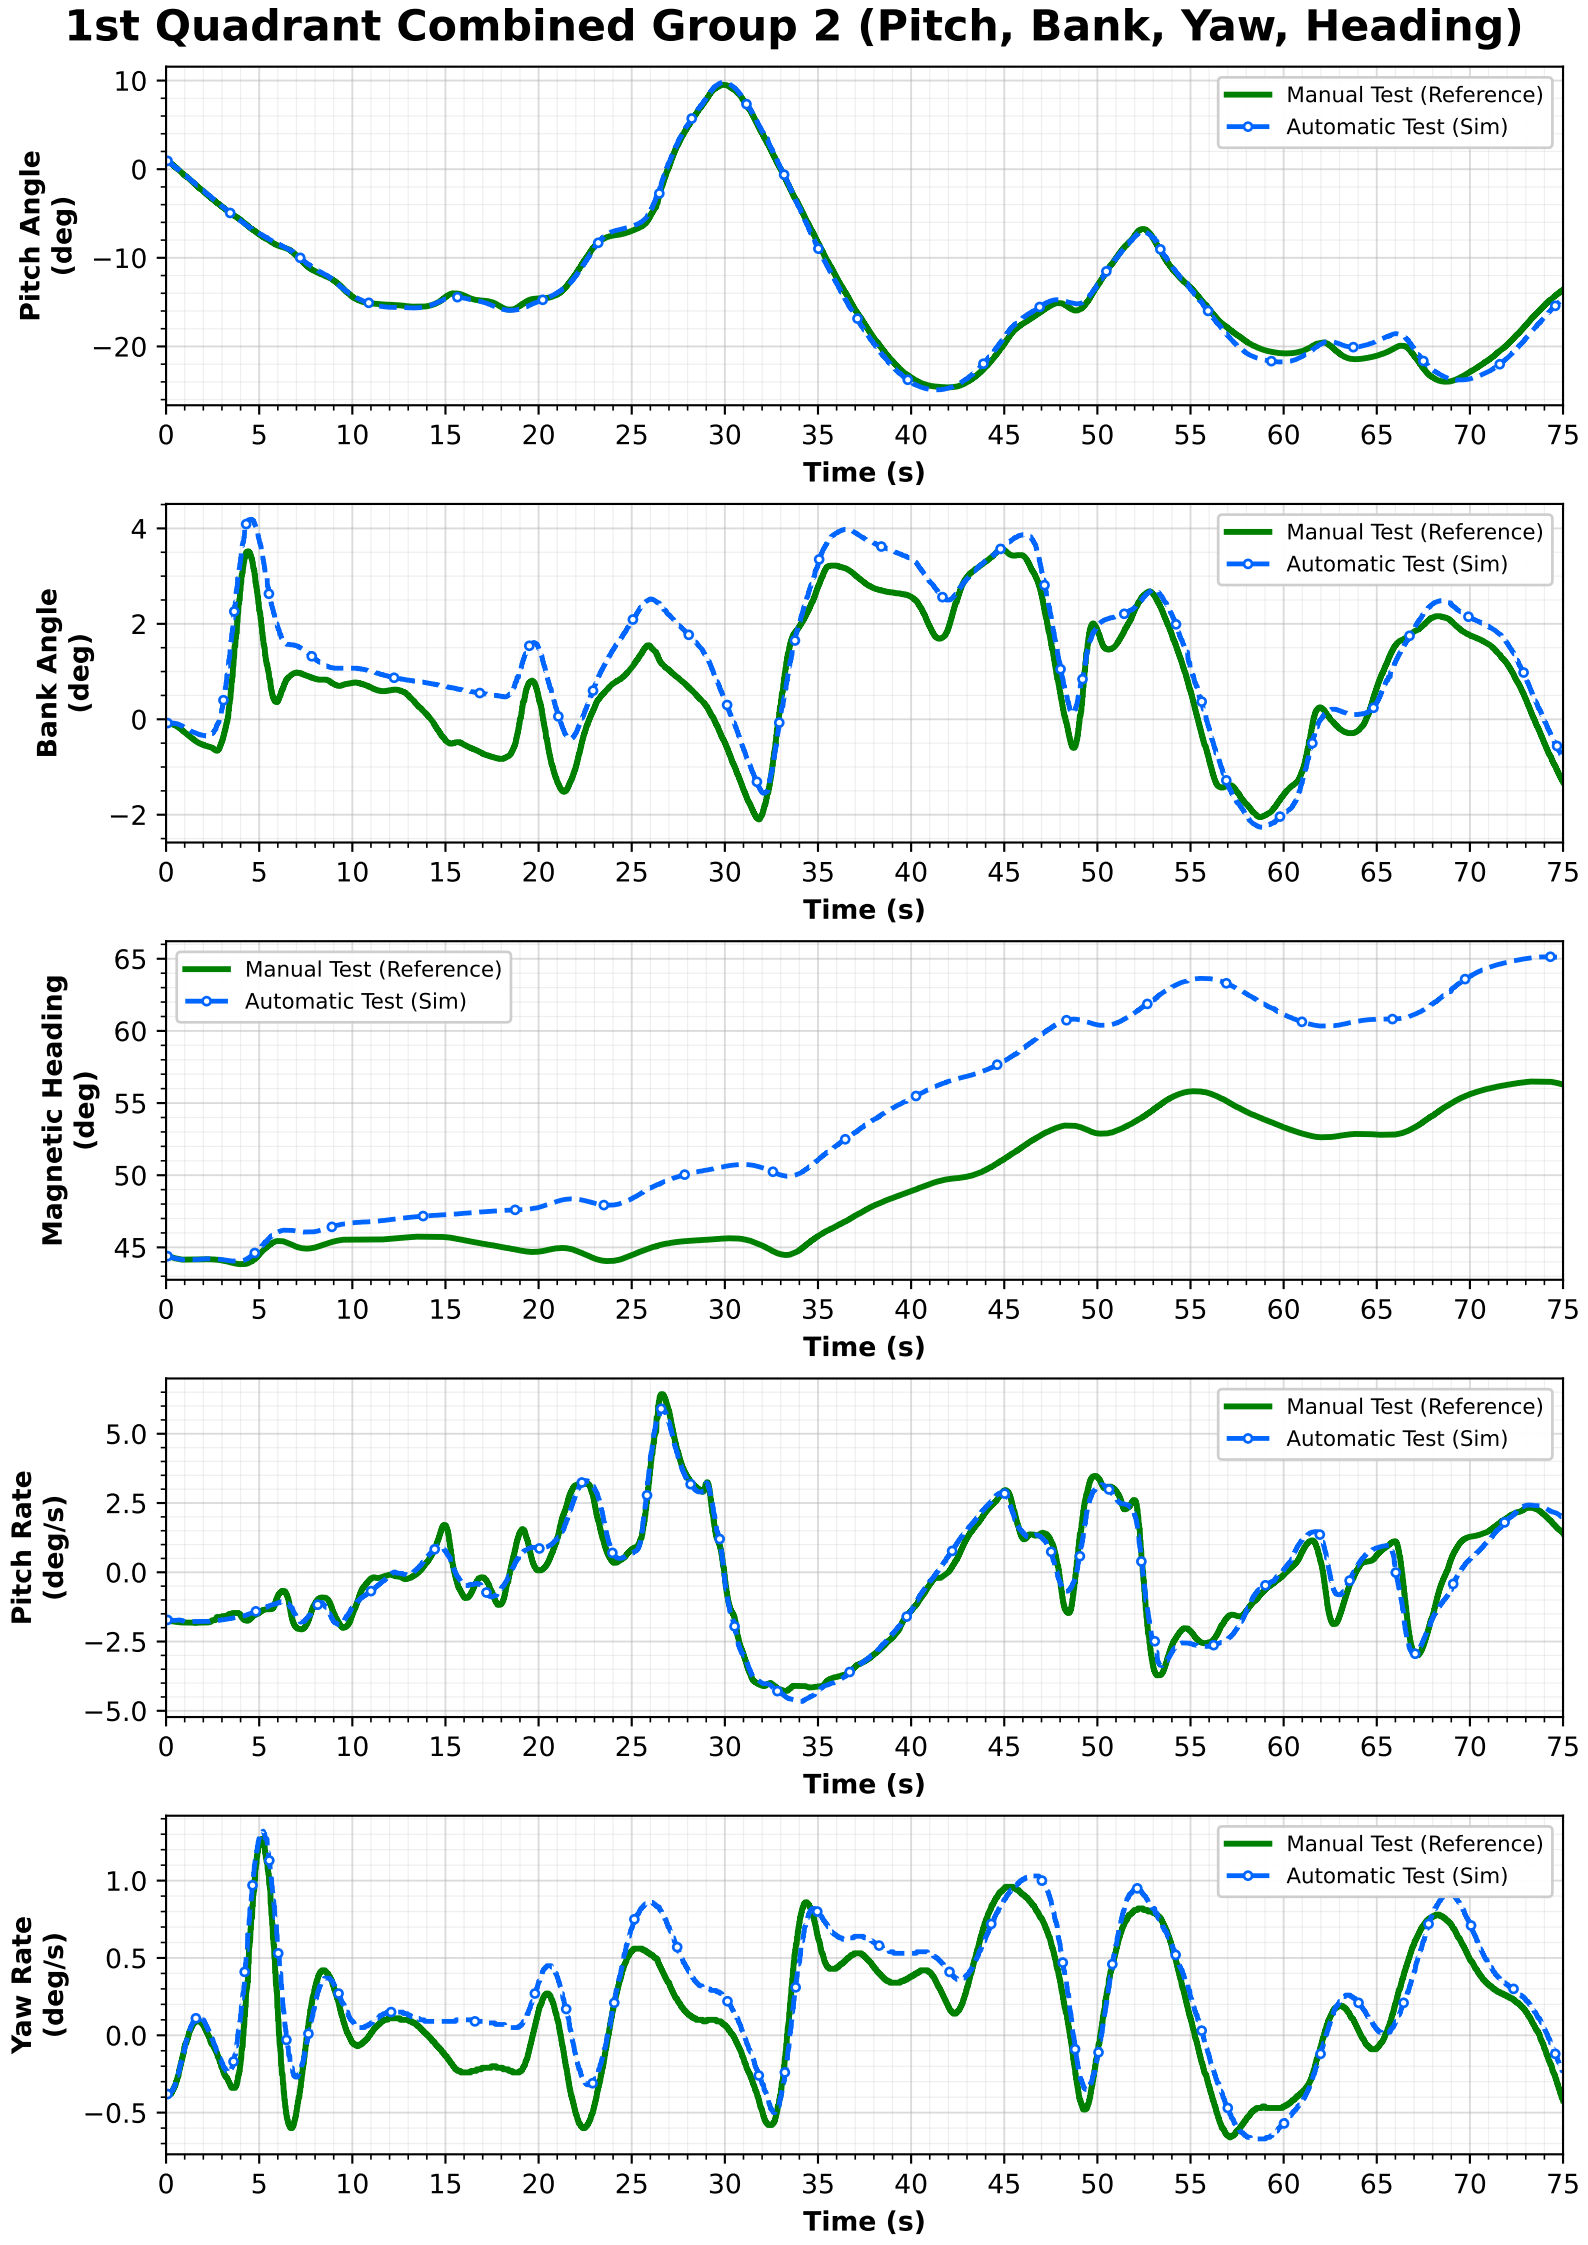
Test Date: 02-Nov-2026 Test Time: 12:57:05

Initial Test Conditions

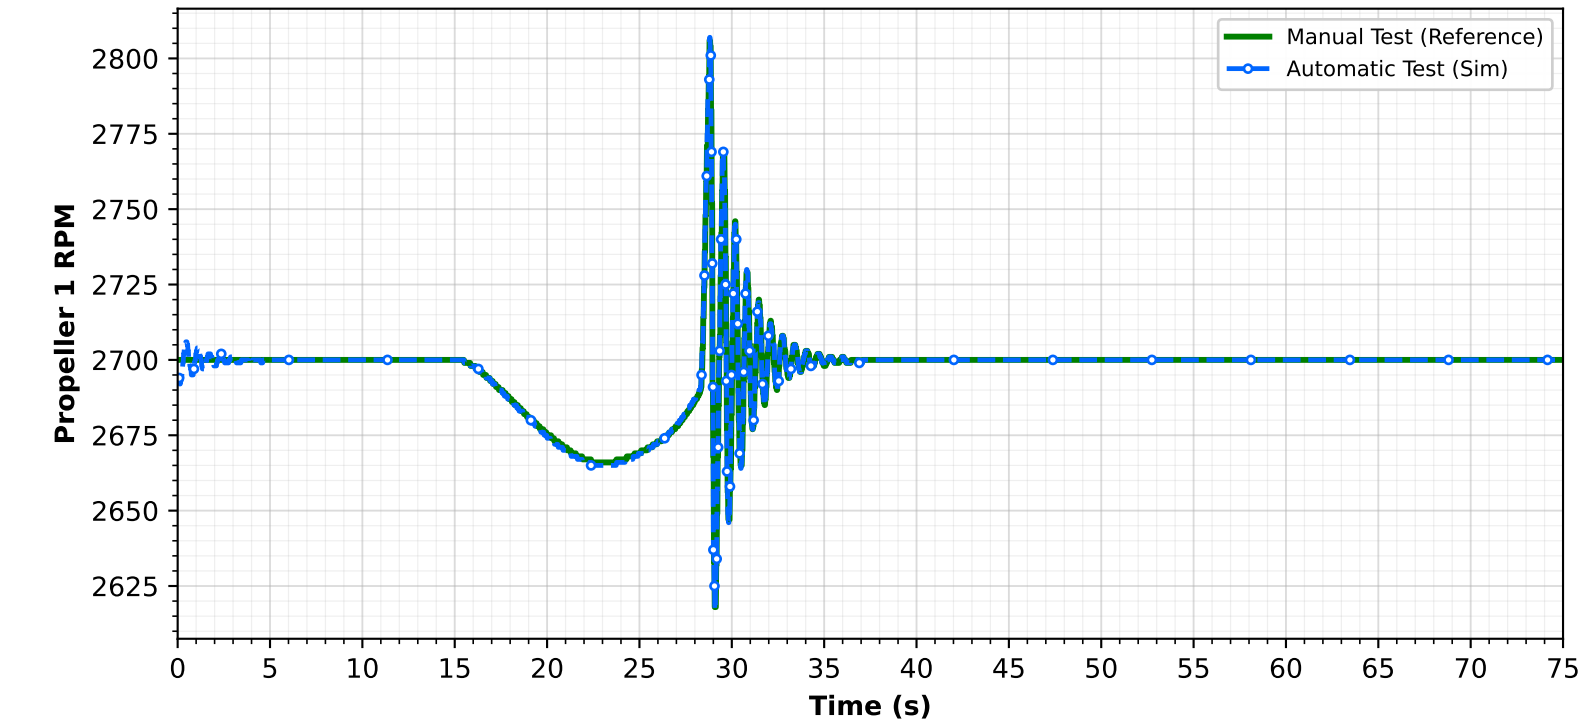
Validation	Sim	
***** Weight and Balance *****		
845.5	845.5	Gross Wt (kg)
106.4	106.4	Total Fuel Quantity (kg)
0.00	0.00	CG Pos in X Axis (mm)
0.00	0.00	CG Pos in Y Axis (mm)
***** Control Parameters *****		
-2.54	-2.82	Pitch Control Position (raw)
-0.47	-0.19	Roll Control Position (raw)
0.00	0.00	Rudder Pedal Position (raw)
81.4	81.4	Throttle Position (%)
-0.03	-0.02	Pitch Force: Applied/Virtual (N)
0.00	-0.00	Roll Force: Applied/Virtual (N)
0.00	-0.00	Yaw Force: Applied/Virtual (N)
***** Environment Parameters *****		
1013	1013	Baro Press (hPa)
10.9	10.9	OAT (deg C)
325.2	325.2	Wind Dir (mag,deg)
7.70	7.70	Wind Spd (kt)
***** Engine Parameters (Piston Engine) *****		
2700	2694	Engine Speed (RPM)
81.4	81.4	Throttle Position (%)
0.00	0.00	Fuel Flow (pph)
534.6	533.6	Exhaust Gas Temp (deg C)

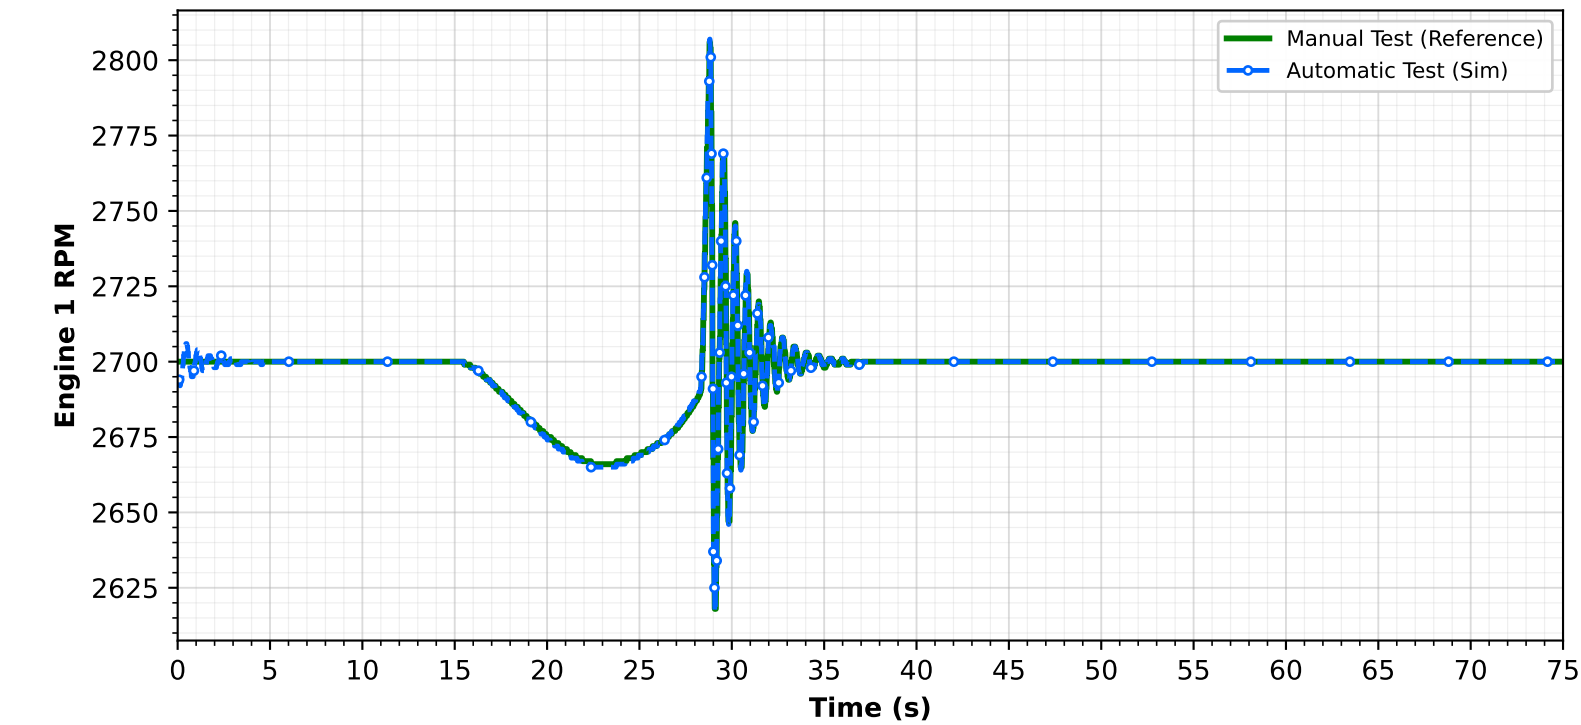
Validation	Sim	
***** Flight Parameters *****		
105.8	105.9	Indicated Airspeed (kt)
109.0	109.1	Ground Speed (kt)
0.17	0.17	Mach Number (-)
2832	2832	Pressure Alt (ft)
2087	2087	Radar Alt (ft)
750.0	750.0	Height of Terrain (ft)
-943.5	-933.9	Vertical Velocity (ft/min)
1.01	0.94	Pitch Angle (deg)
-0.08	-0.08	Bank Angle (deg)
44.4	44.4	Heading (deg)
1.88	1.88	Aircraft Angle of Attack (deg)
-0.11	-0.09	Sideslip Angle (deg)
48.3	44.9	Track Angle (deg)
0.08	0.04	Roll Rate (deg/s)
-1.72	-1.72	Pitch Rate (deg/s)
-0.38	-0.38	Yaw Rate (deg/s)
1.20	1.19	X Body Acceleration (g)
0.05	0.08	Y Body Acceleration (g)
1.23	1.44	Z Body Acceleration (g)

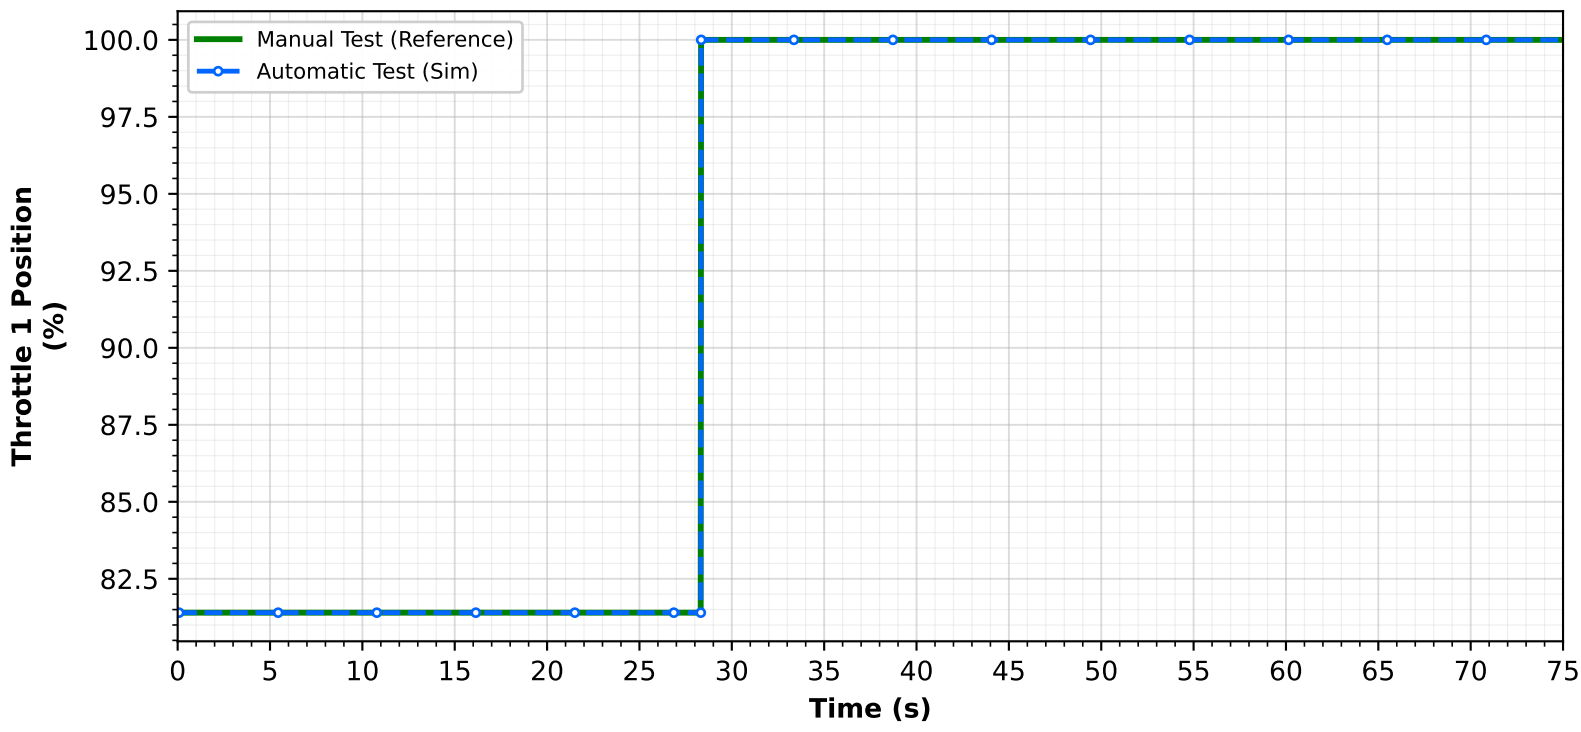

1st Quadrant Combined Group 1 (Airspeed, Climb, Altitude)
Indicated Airspeed (kts)
Manual Test (Reference)
Automatic Test (Sim)
POH Speed (80 kt)
Tolerance (±3 kt)
Time (s)
Rate of Climb/Descent (fpm)
Manual Test (Reference)
Automatic Test (Sim)
POH ROC (820 fpm)
Tolerance (±100 fpm)
Time (s)
Indicated Altitude (ft)
Manual Test (Reference)
Automatic Test (Sim)
Tolerance (-1000 ft)
Time (seconds)

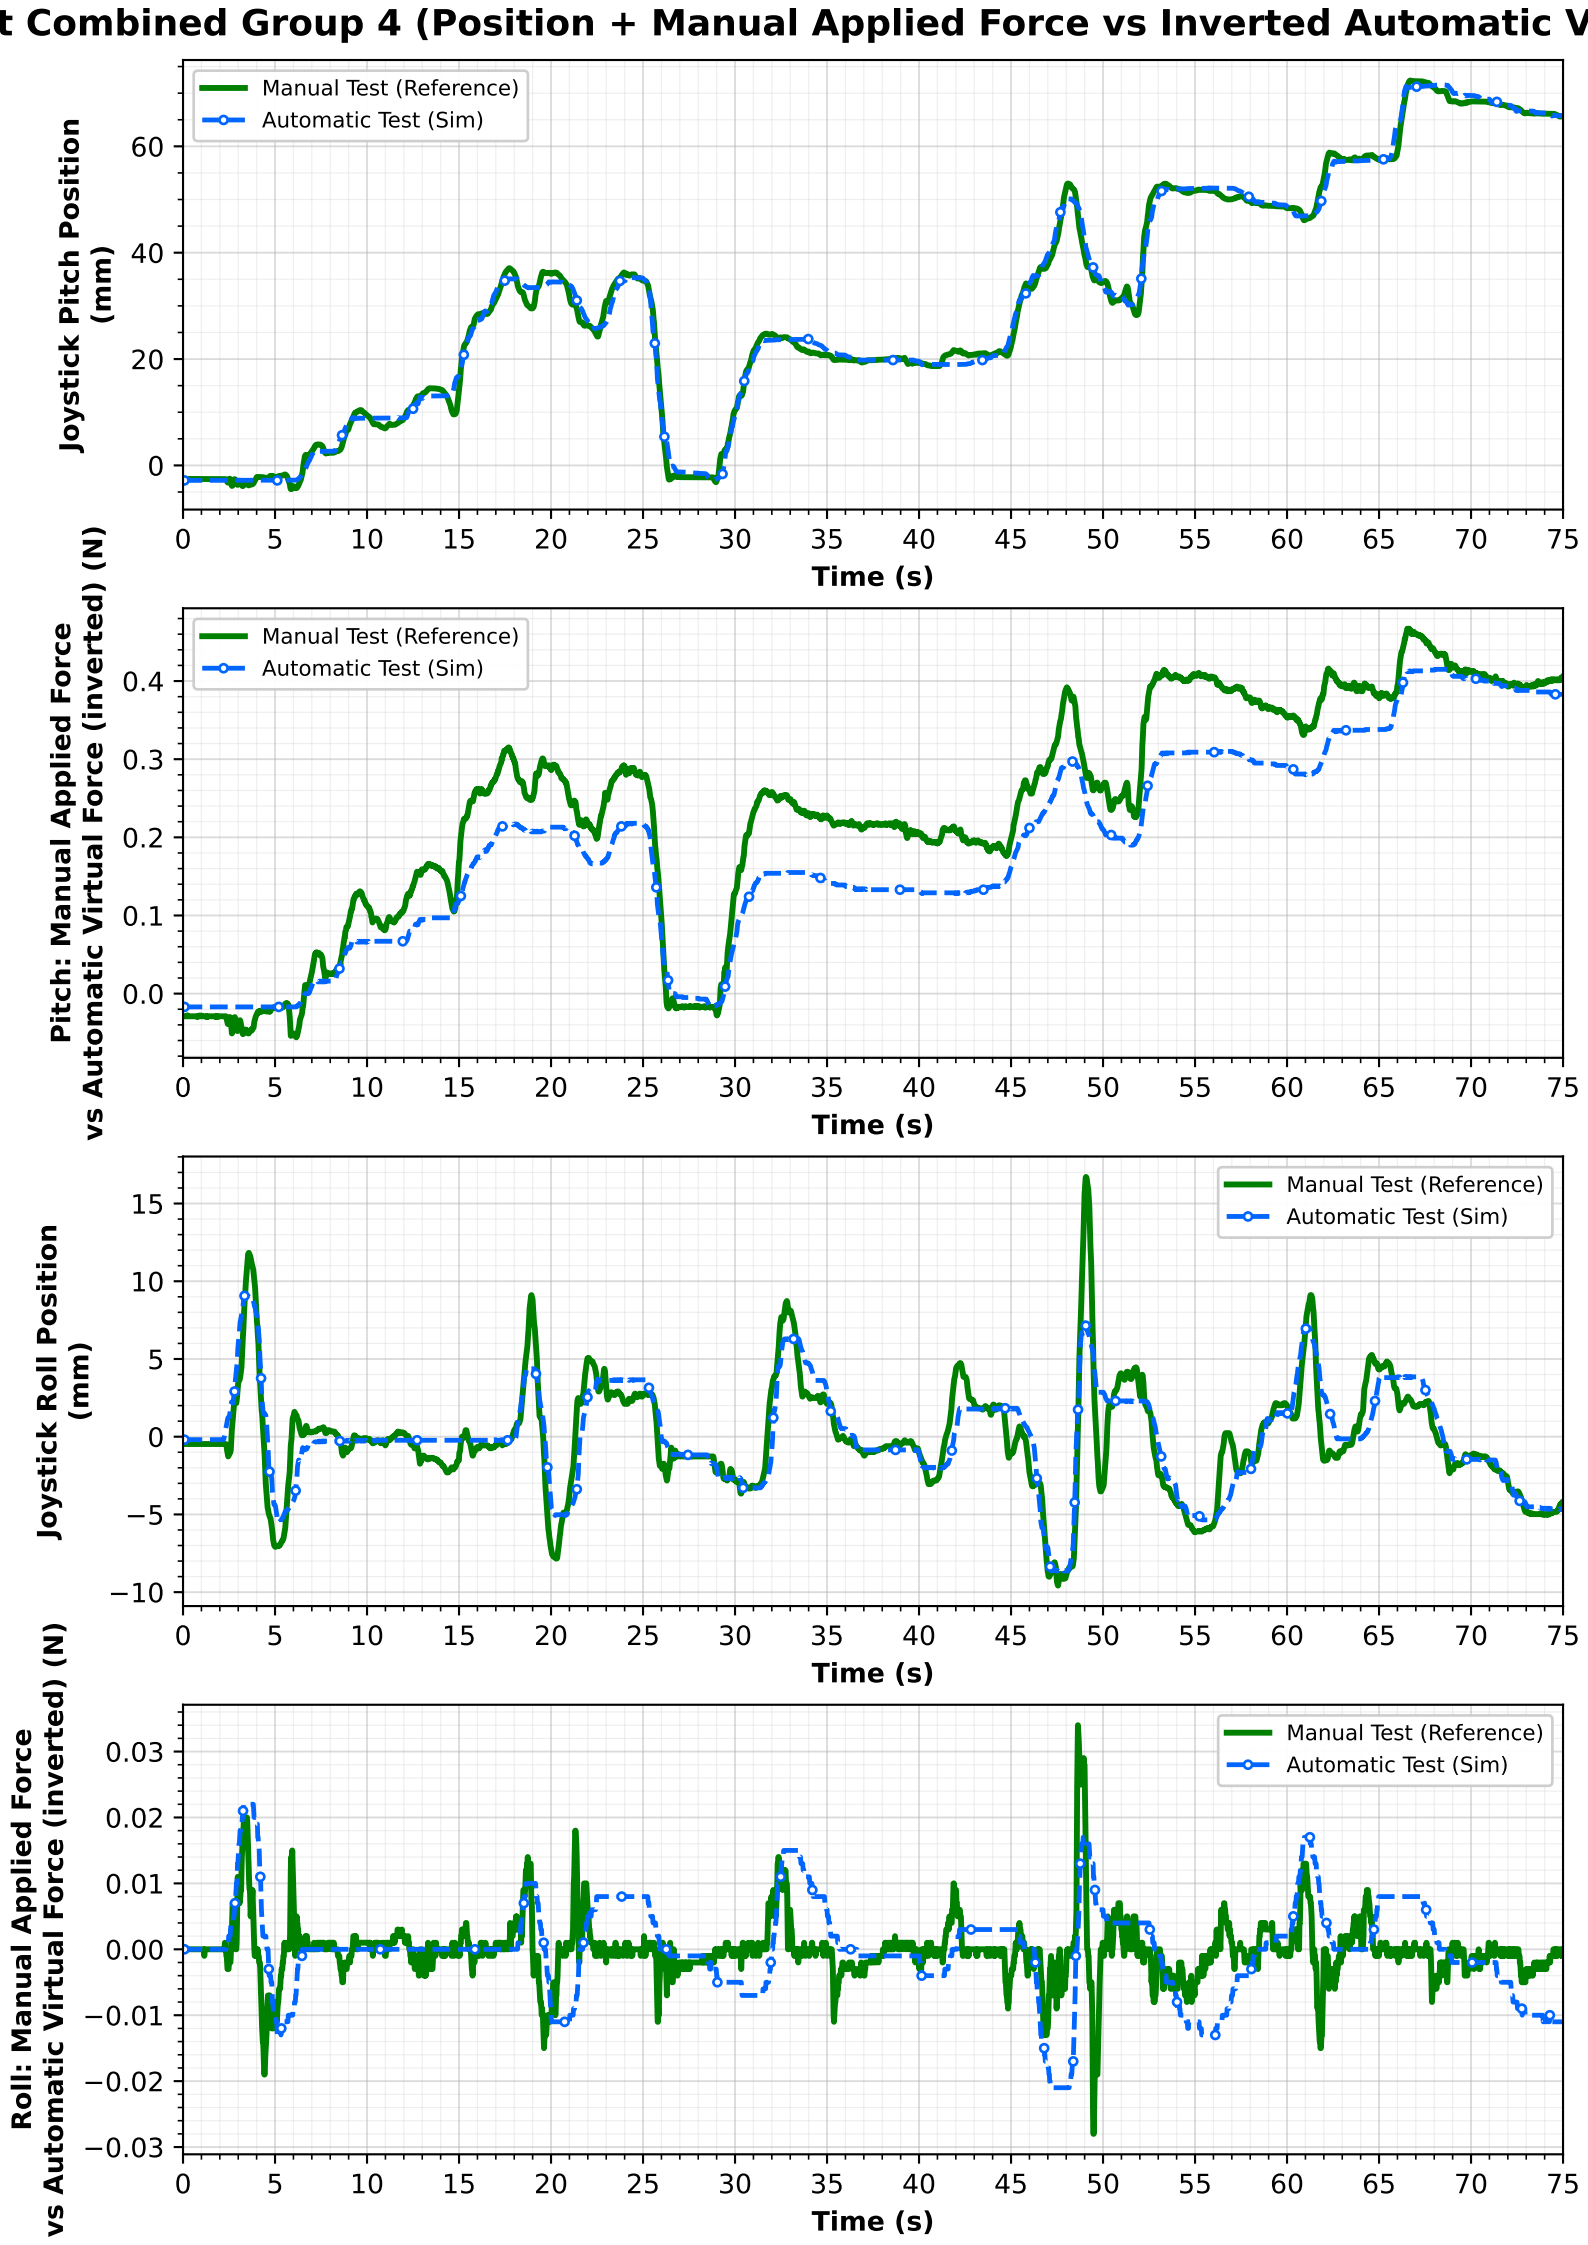

1st Quadrant Combined Group 2 (Pitch, Bank, Yaw, Heading)
Pitch Angle (deg)
Bank Angle (deg)
Magnetic Heading (deg)
Pitch Rate (deg/s)
Yaw Rate (deg/s)
Time (s)
Manual Test (Reference)
Automatic Test (Sim)

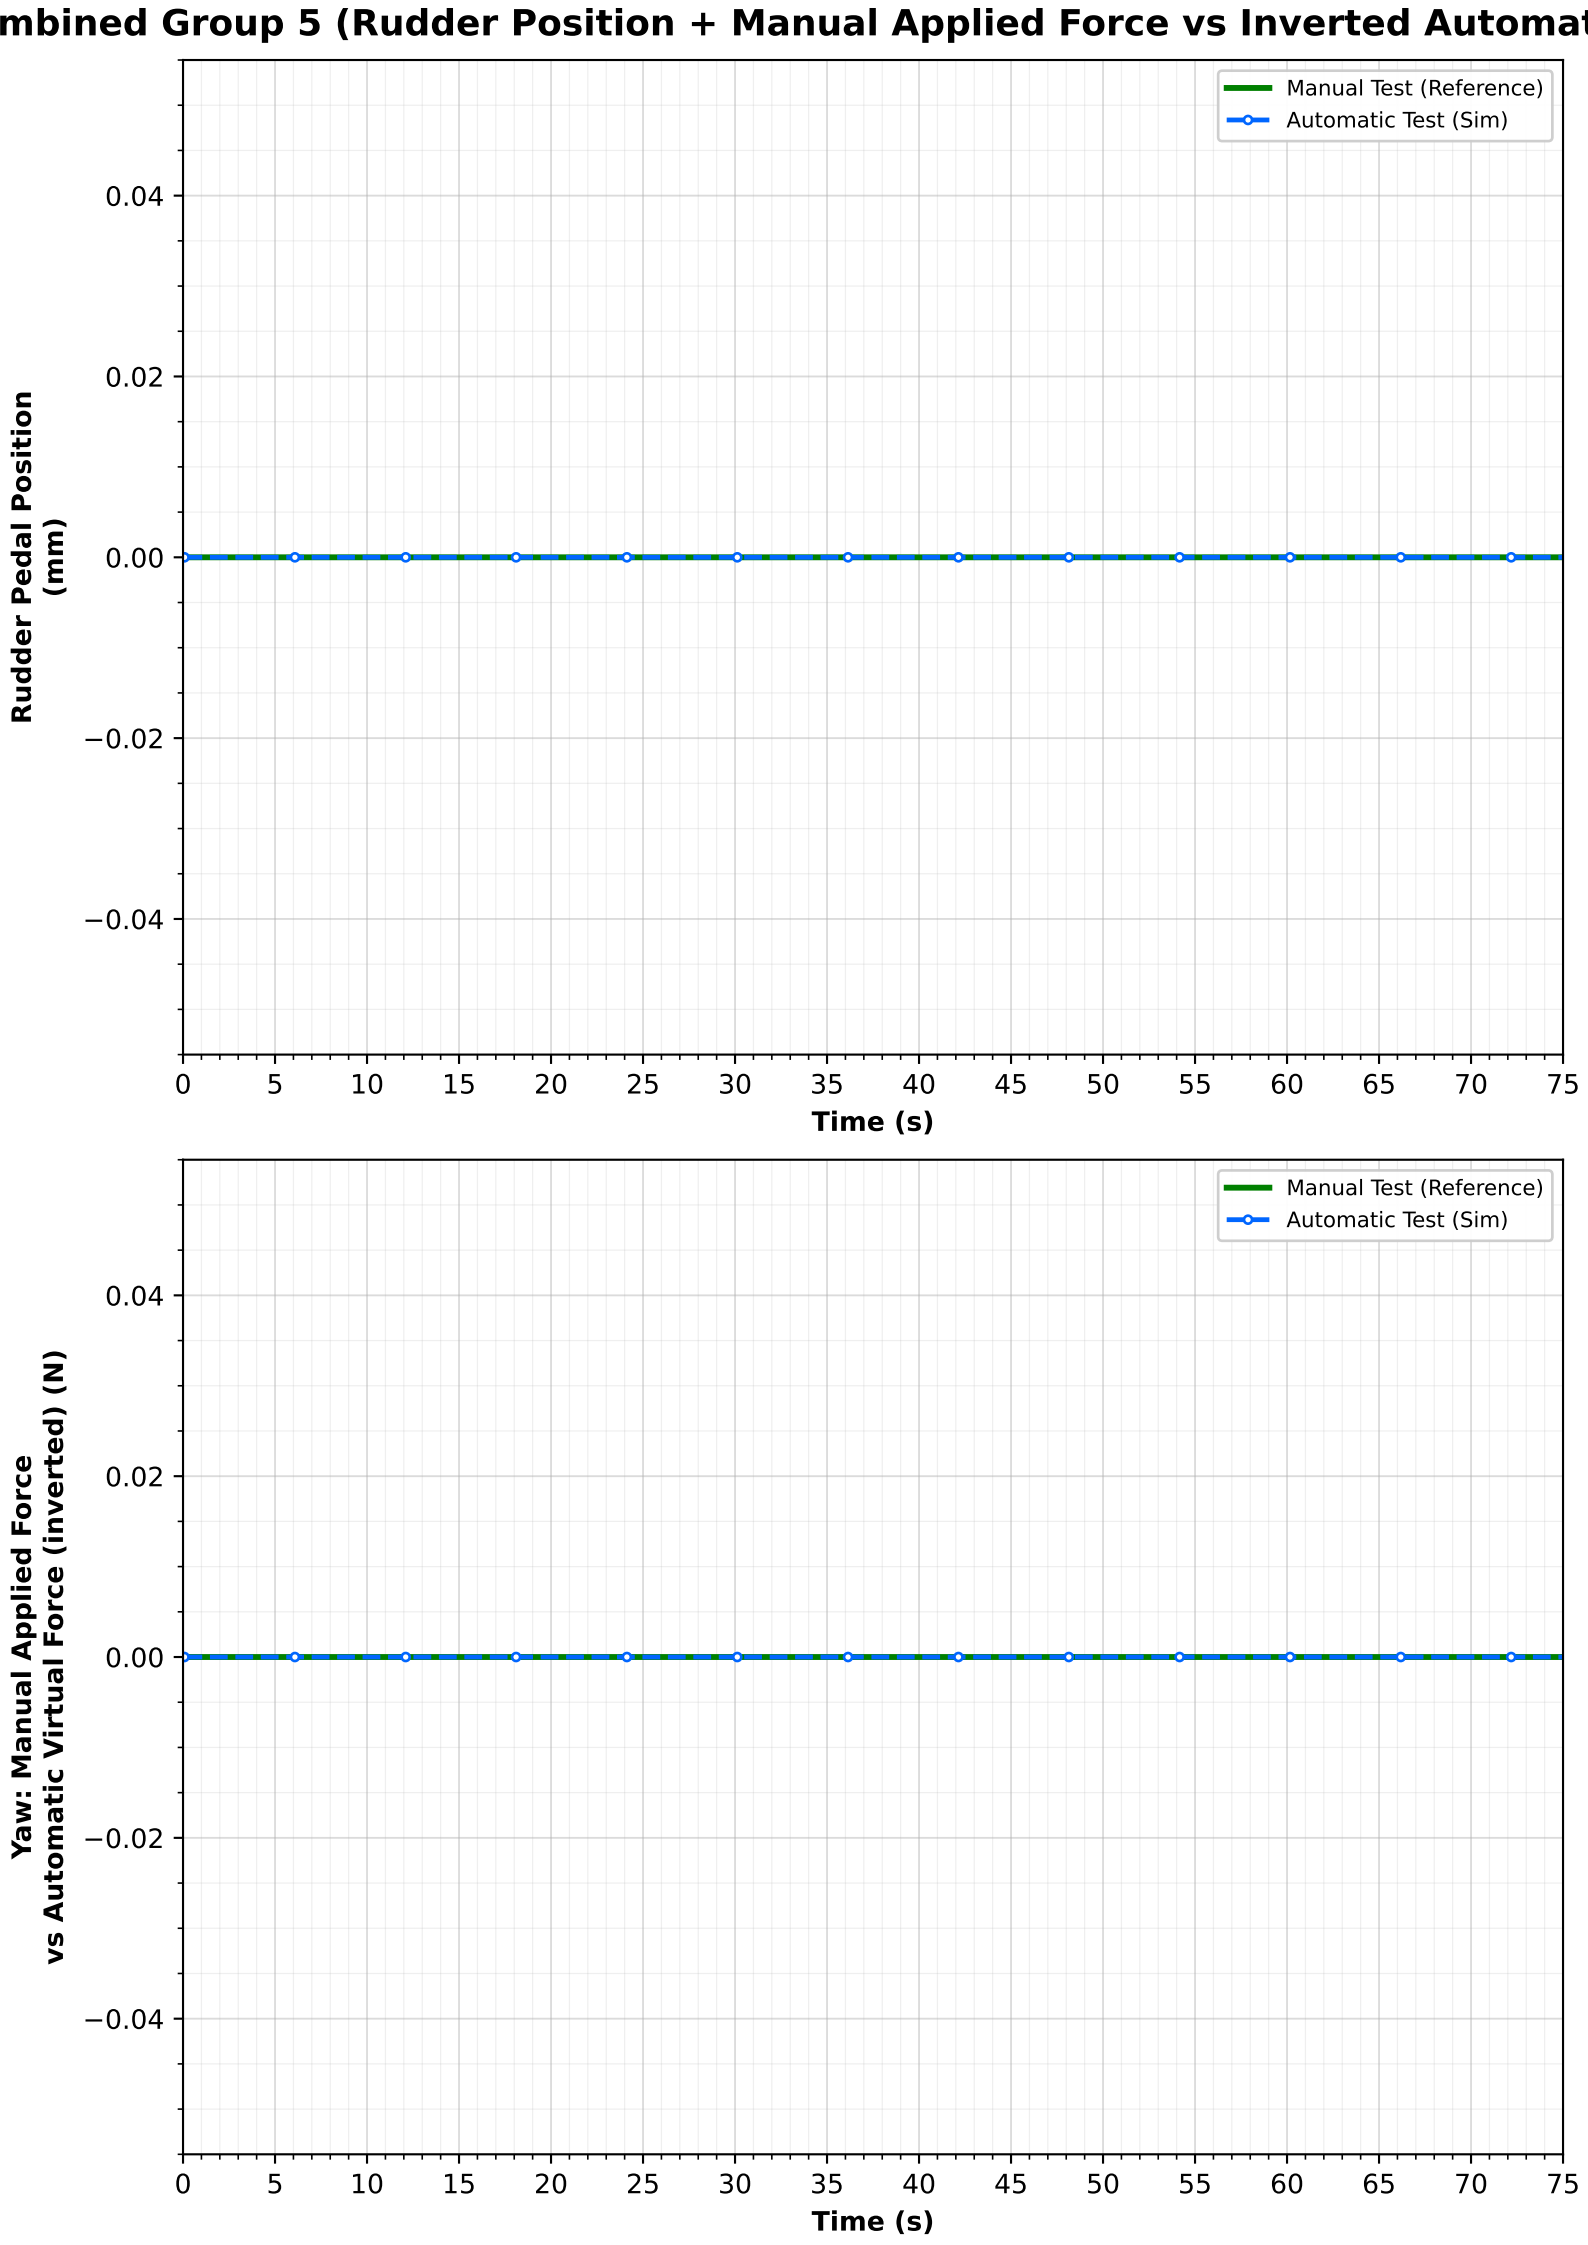
1st Quadrant Combined Group 3 (Propeller, Engine, Throttle)








t Combined Group 4 (Position + Manual Applied Force vs Inverted Automatic V
Manual Test (Reference)
Automatic Test (Sim)
Joystick Pitch Position (mm)
Time (s)
Pitch: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
Joystick Roll Position (mm)
Roll: Manual Applied Force vs Automatic Virtual Force (inverted) (N)


mbined Group 5 (Rudder Position + Manual Applied Force vs Inverted Automat
Manual Test (Reference)
Automatic Test (Sim)
Rudder Pedal Position (mm)
0.04
0.02
0.00
−0.02
−0.04
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)
Manual Test (Reference)
Automatic Test (Sim)
Yaw: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
0.04
0.02
0.00
−0.02
−0.04
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)