Doc Number: 161310G00000-00	Doc Version: 008	Date: 02-Nov-2026

Super Mushshak Automatic Flight Test

Prepar3D v5 | Rahwali Airfield (OPRW) | Automatic Testing Mode

Super Mushshak Logger - ver. 1.0

Super Mushshak Airborne Automatic Testing Suite

Flight Test File: Super_Mushak_auto_takeoff_data_2026-11-02_13-14-03.csv

ONLINE, AUTOMATIC


Test Date: 02-Nov-2026 Test Time: 13:14:03


Initial Test Conditions


Validation	Sim	
***** Weight and Balance *****		
853.3	853.3	Gross Wt (kg)
114.1	114.1	Total Fuel Quantity (kg)
0.00	0.00	CG Pos in X Axis (mm)
0.00	0.00	CG Pos in Y Axis (mm)
***** Control Parameters *****		
0.20	0.21	Pitch Control Position (raw)
15.3	15.3	Roll Control Position (raw)
0.25	0.22	Rudder Pedal Position (raw)
90.0	90.0	Throttle Position (%)
-0.00	-0.20	Pitch Force: Applied/Virtual (N)
0.00	-6.00	Roll Force: Applied/Virtual (N)
0.01	-19.9	Yaw Force: Applied/Virtual (N)
***** Environment Parameters *****		
1013	1013	Baro Press (hPa)
10.7	10.7	OAT (deg C)
323.6	323.6	Wind Dir (mag,deg)
8.10	8.10	Wind Spd (kt)
***** Engine Parameters (Piston Engine) *****		
2700	2710	Engine Speed (RPM)
90.0	90.0	Throttle Position (%)
0.00	0.00	Fuel Flow (pph)
545.8	547.7	Exhaust Gas Temp (deg C)

Validation	Sim	
***** Flight Parameters *****		
92.5	92.7	Indicated Airspeed (kt)
92.9	93.0	Ground Speed (kt)
0.15	0.15	Mach Number (-)
2963	2963	Pressure Alt (ft)
2218	2224	Radar Alt (ft)
750.0	750.0	Height of Terrain (ft)
-268.7	-272.4	Vertical Velocity (ft/min)
3.97	4.01	Pitch Angle (deg)
-22.6	-22.6	Bank Angle (deg)
11.5	11.4	Heading (deg)
1.95	1.92	Aircraft Angle of Attack (deg)
6.56	6.48	Sideslip Angle (deg)
25.1	325.5	Track Angle (deg)
2.47	2.47	Roll Rate (deg/s)
0.39	0.37	Pitch Rate (deg/s)
-4.72	-4.72	Yaw Rate (deg/s)
-1.47	-1.44	X Body Acceleration (g)
-0.57	-0.70	Y Body Acceleration (g)
2.90	2.15	Z Body Acceleration (g)


1st Quadrant Combined Group 1 (Airspeed, Climb, Altitude)

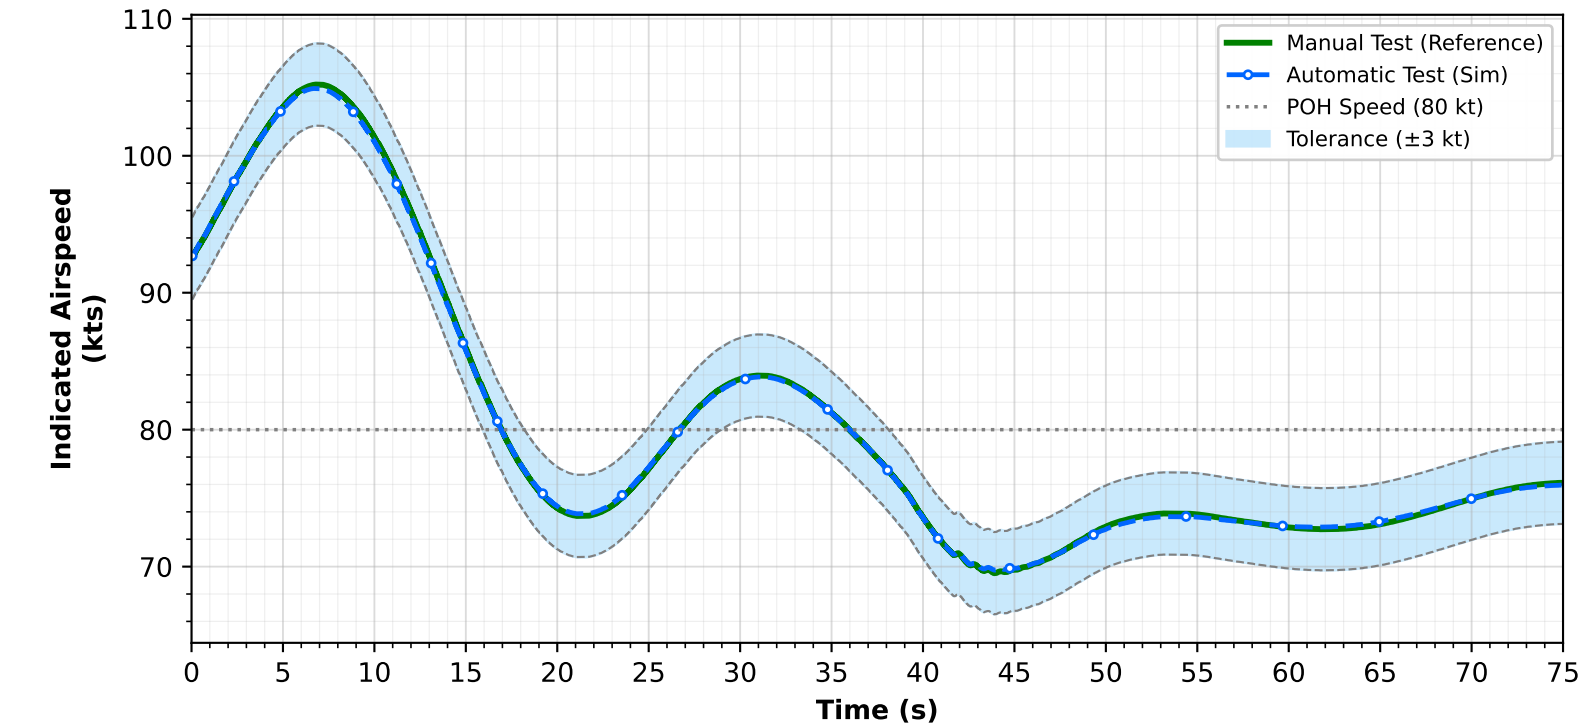


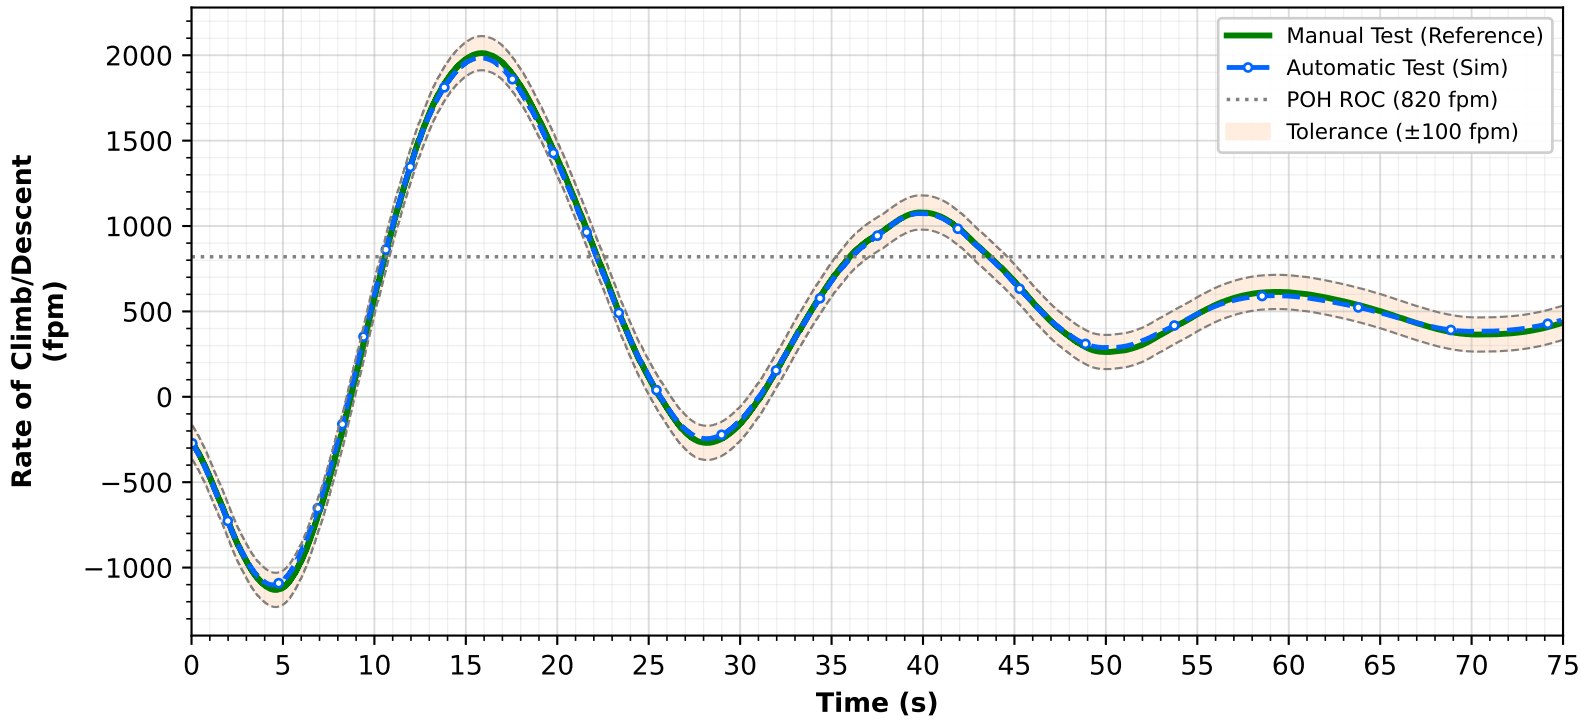


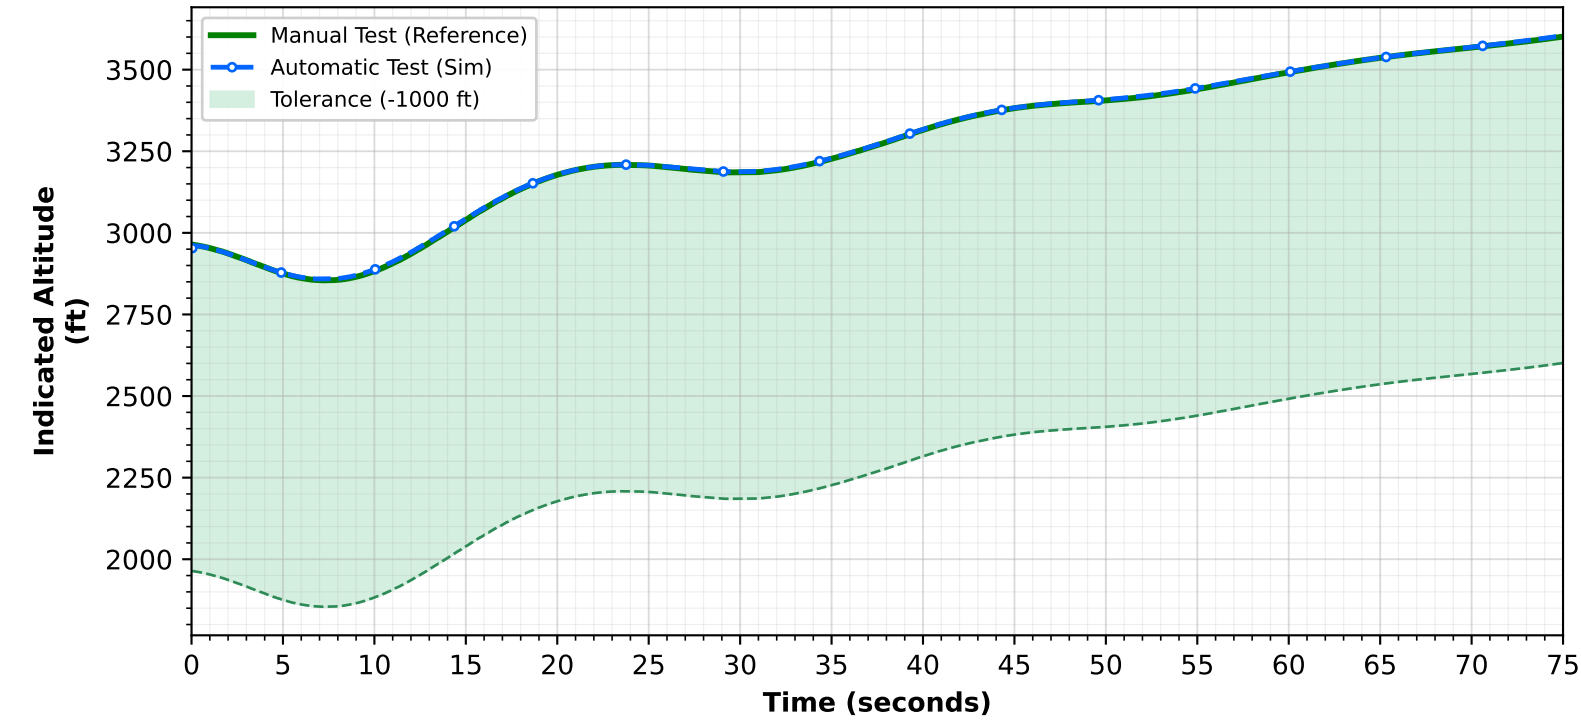



1st Quadrant Combined Group 2 (Pitch, Bank, Yaw, Heading)

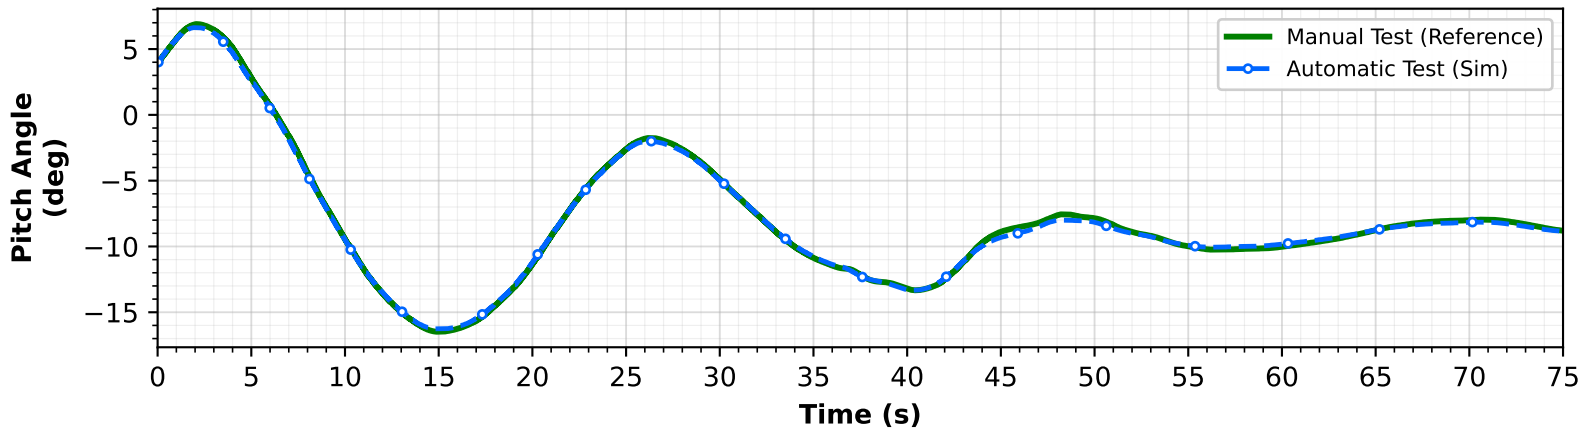

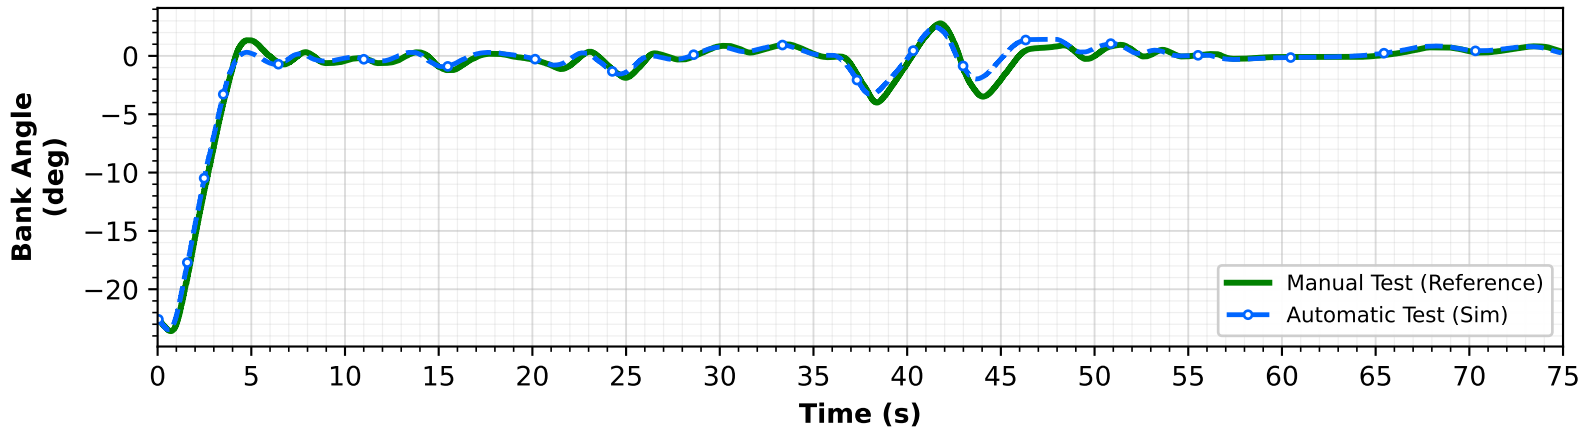


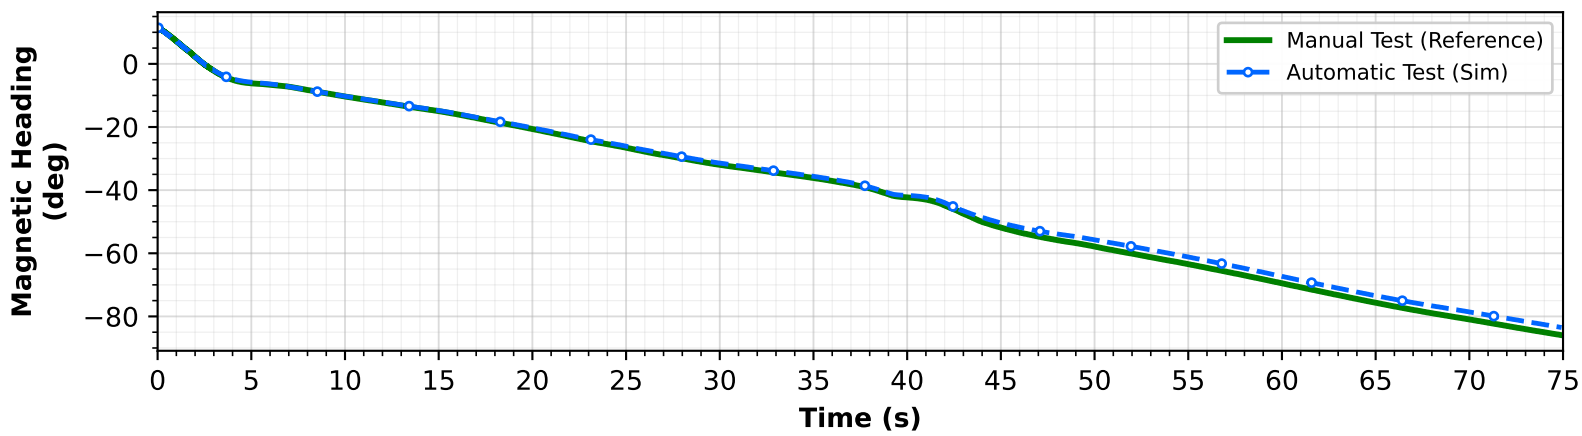


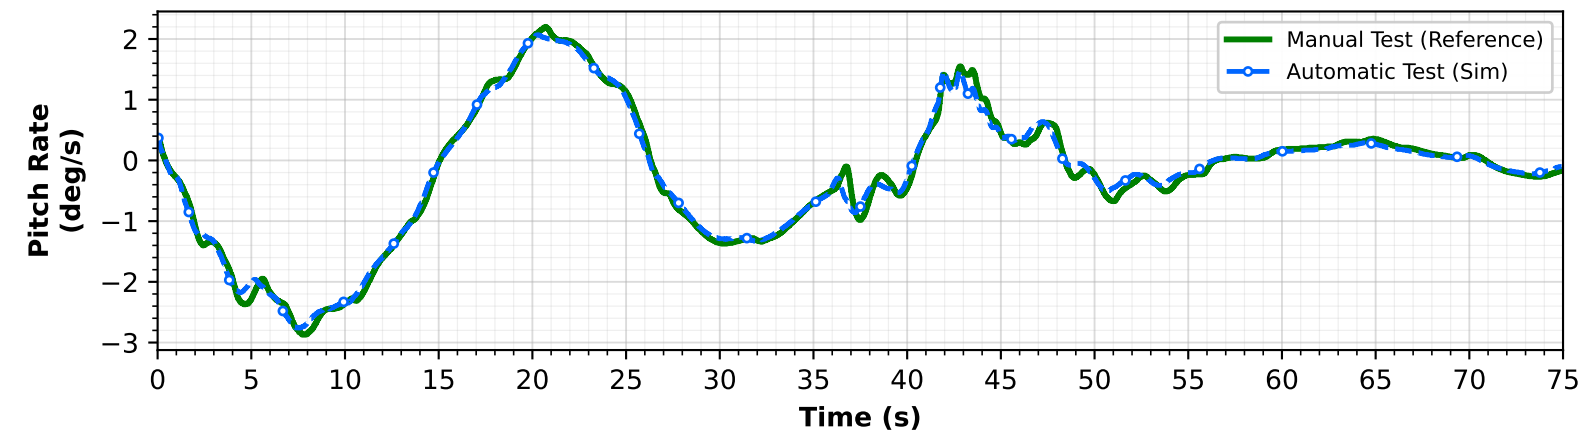


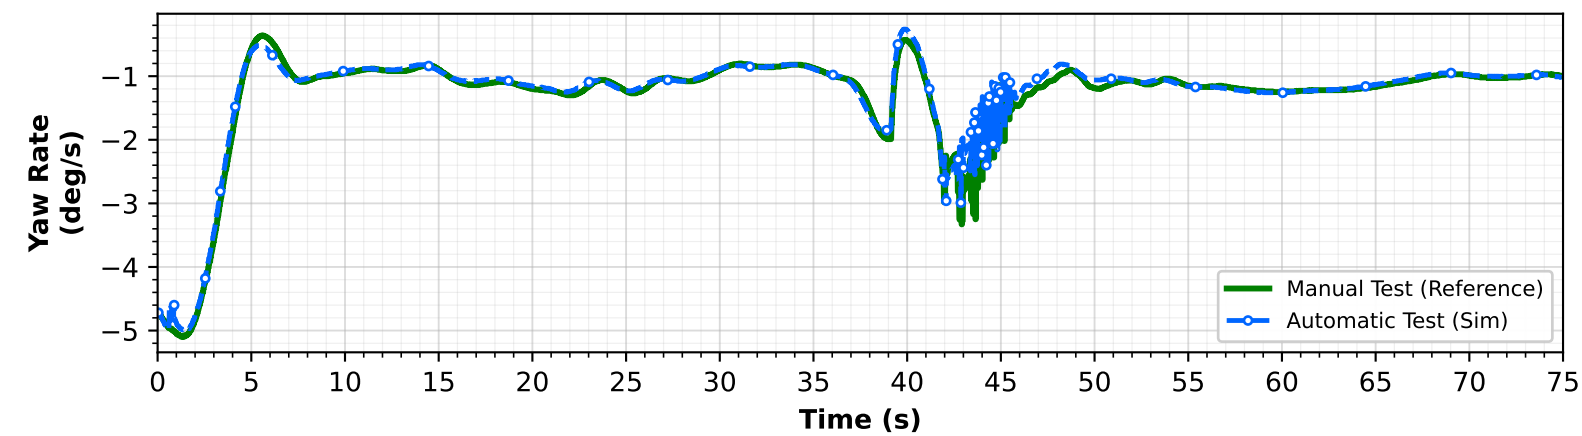



1st Quadrant Combined Group 3 (Propeller, Engine, Throttle)

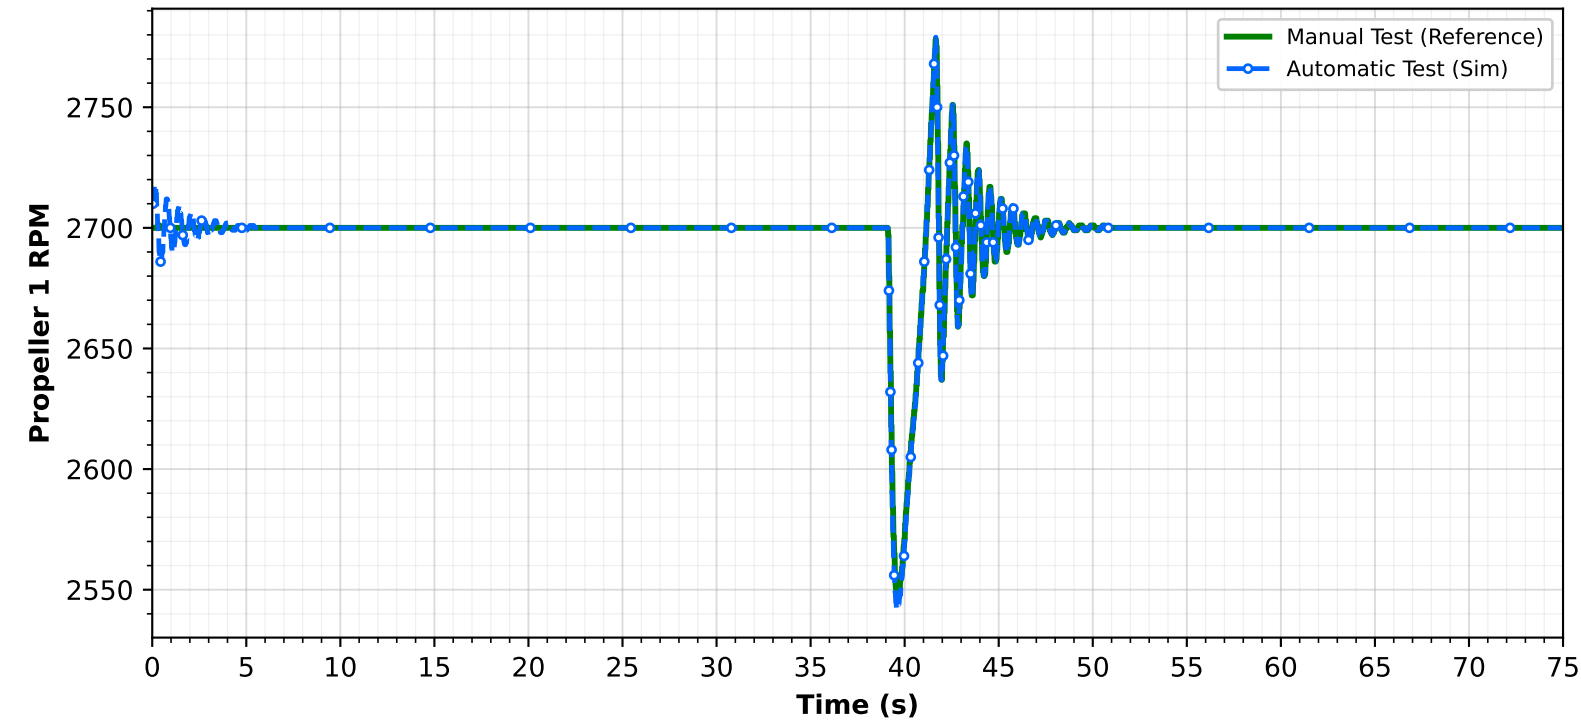

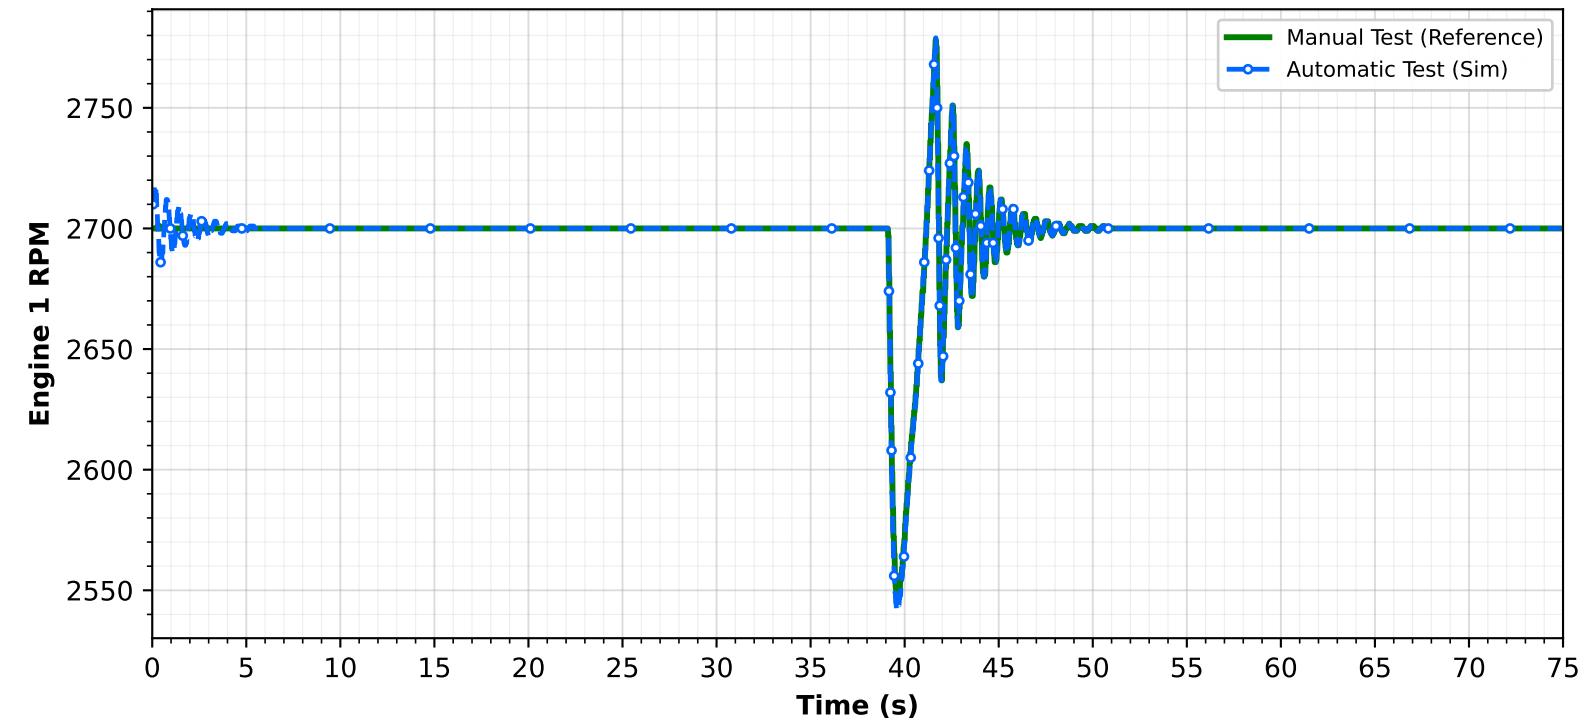

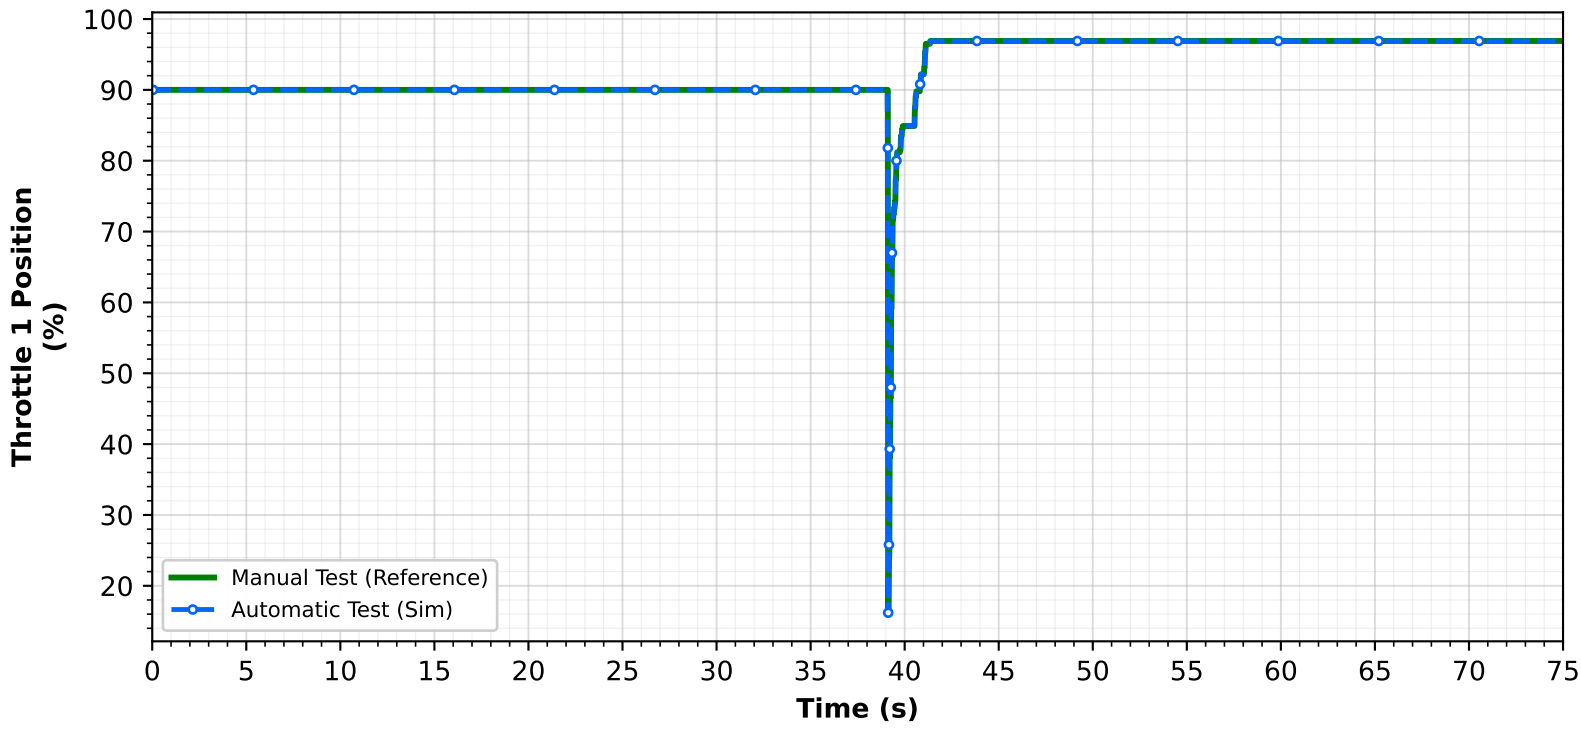

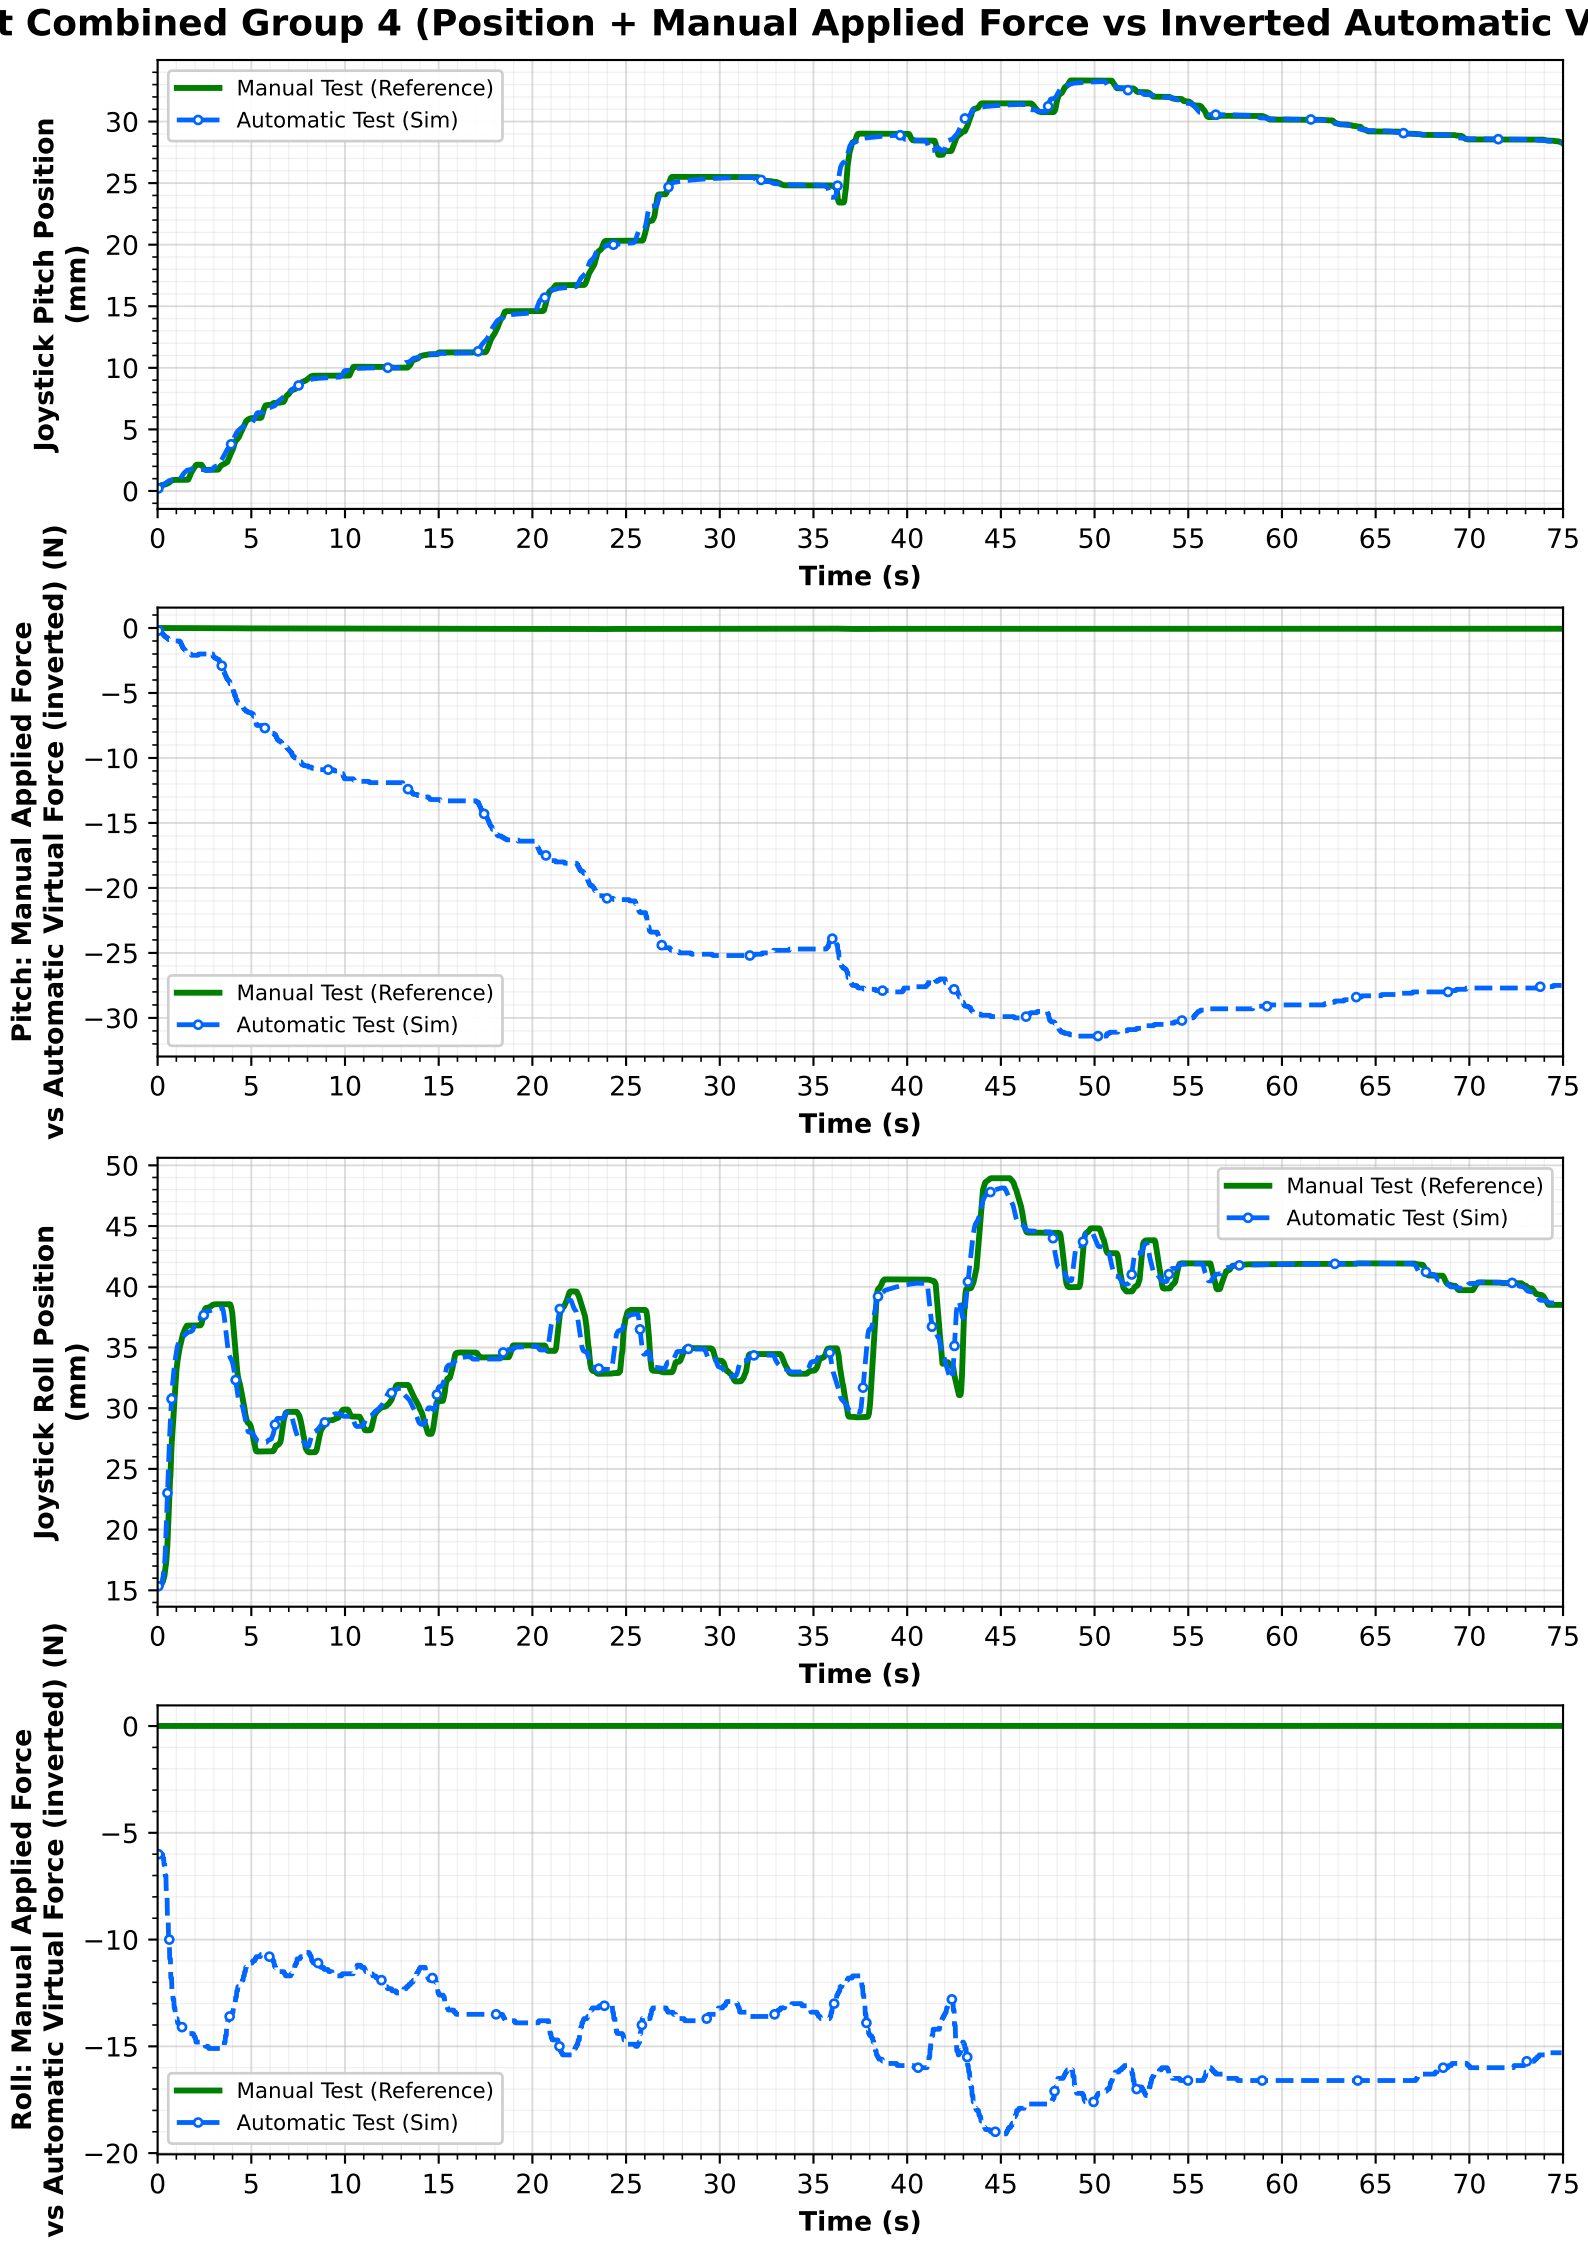
t Combined Group 4 (Position + Manual Applied Force vs Inverted Automatic V
Joystick Pitch Position (mm)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Pitch: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Joystick Roll Position (mm)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Roll: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)

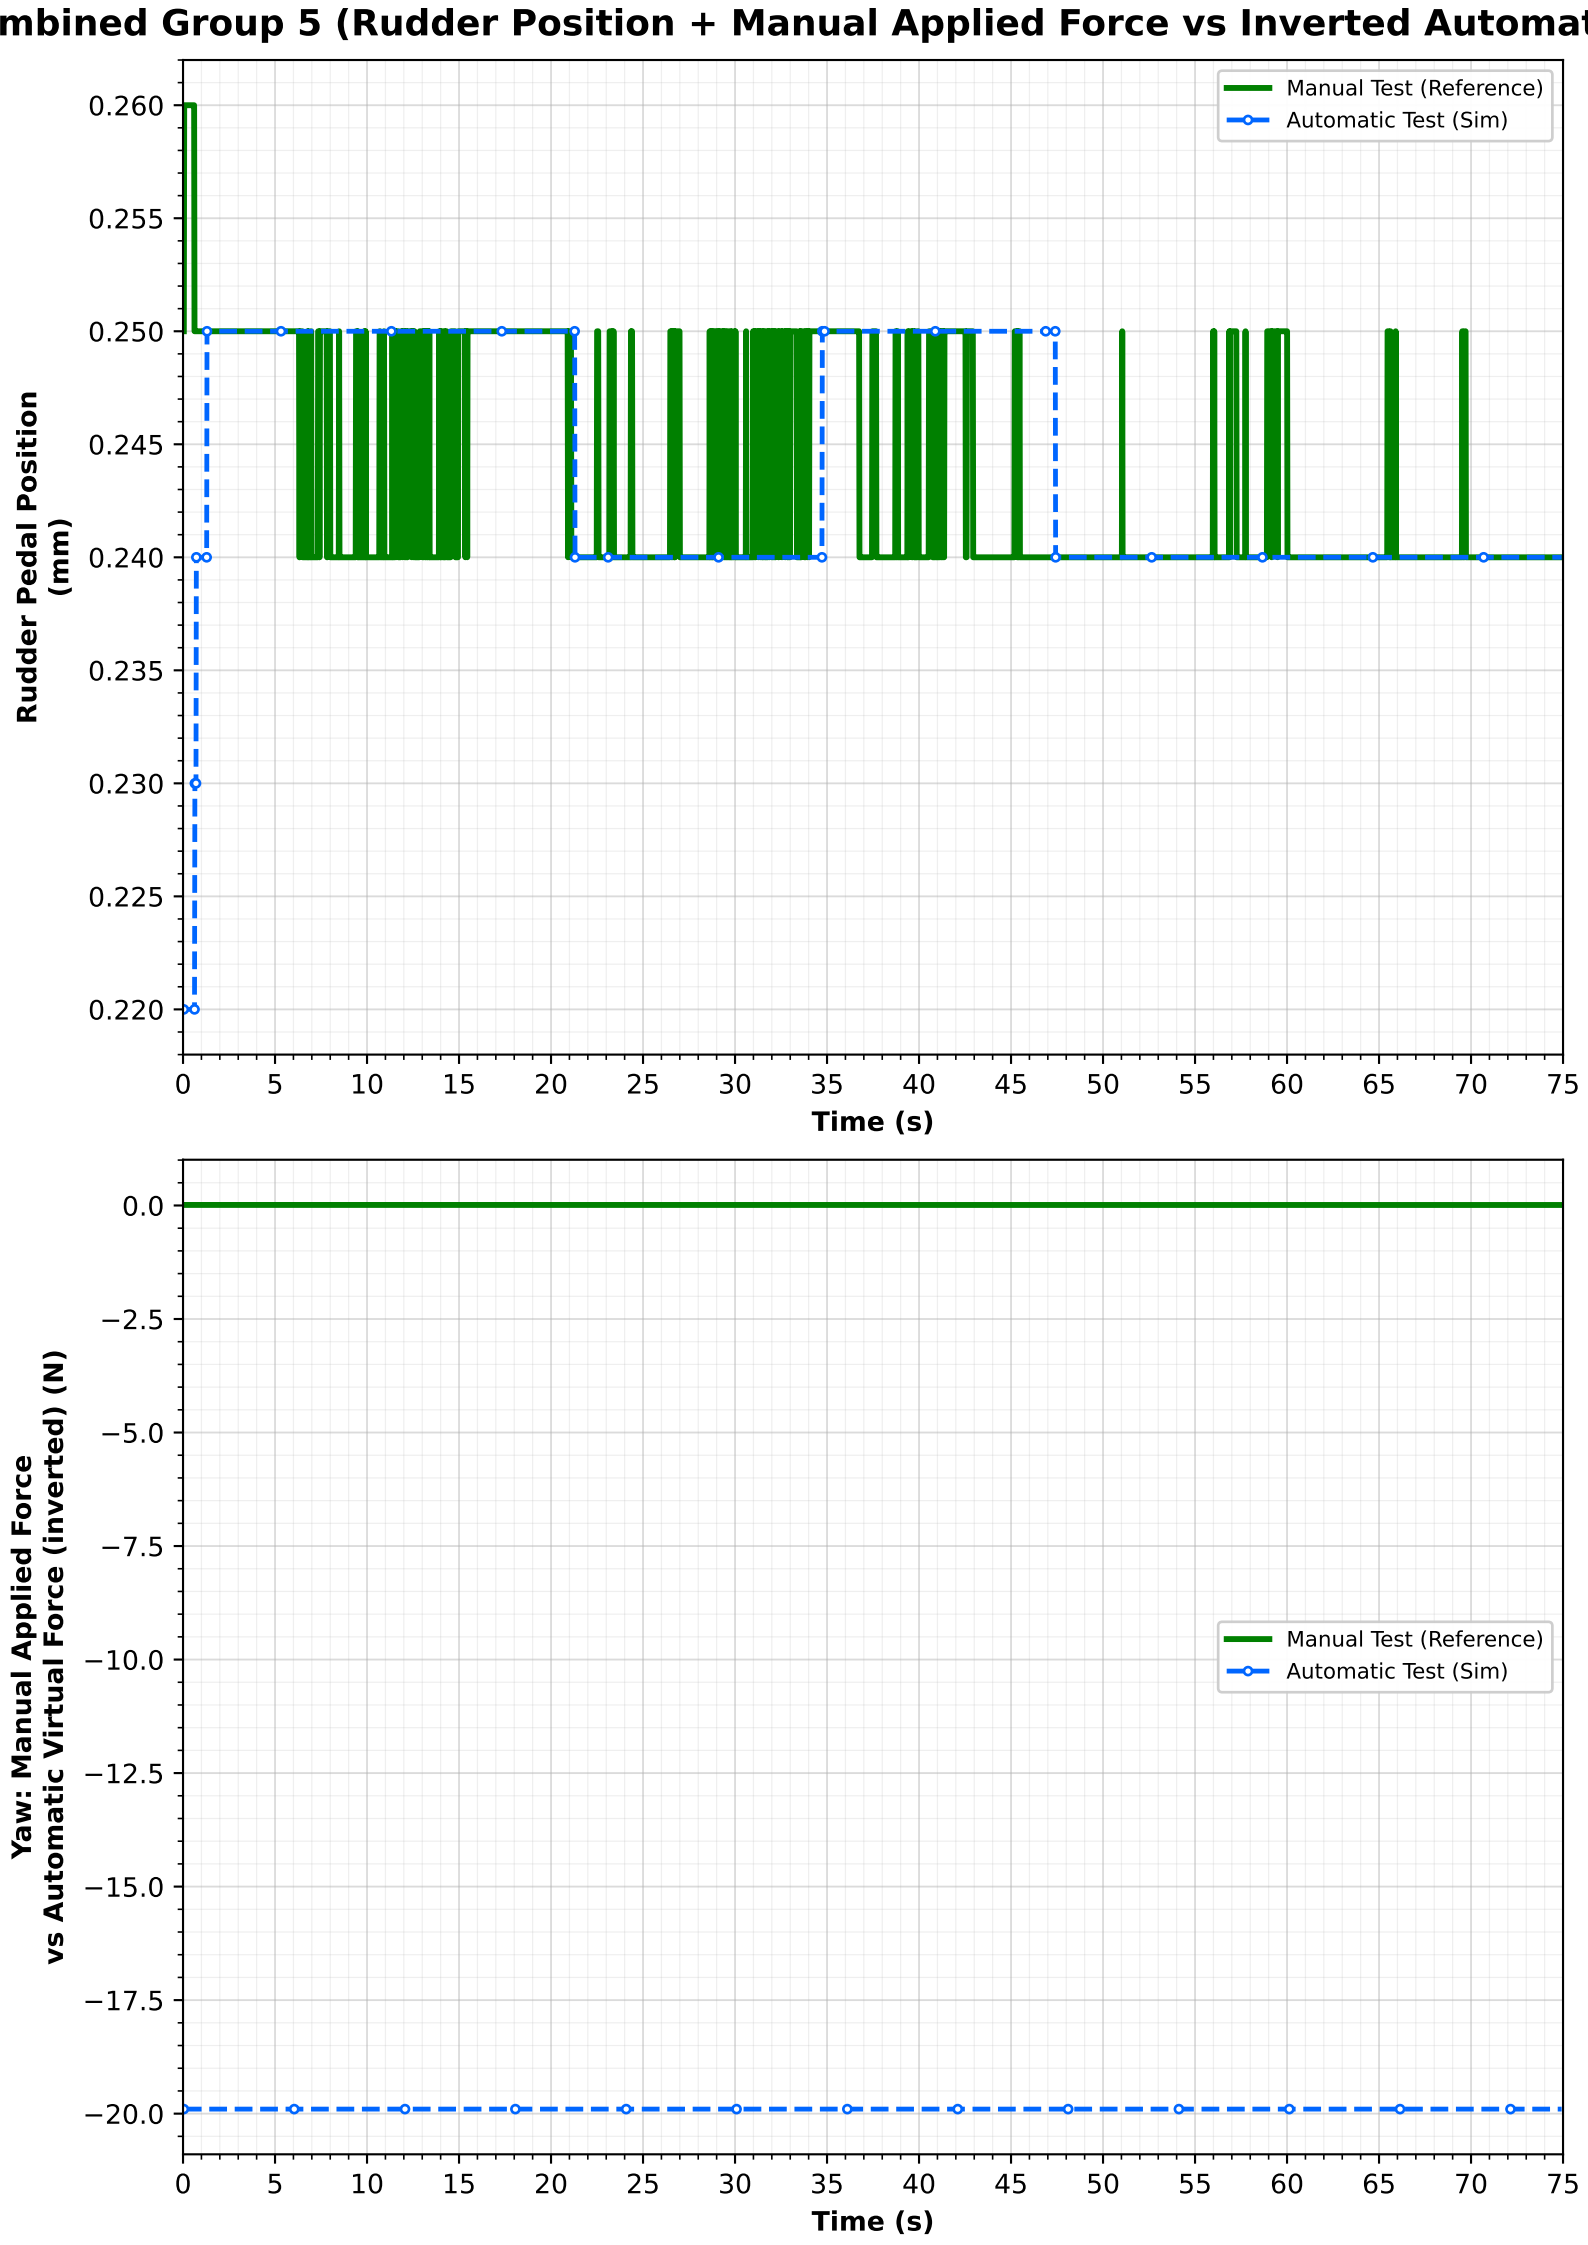
mbined Group 5 (Rudder Position + Manual Applied Force vs Inverted Automat
Manual Test (Reference)
Automatic Test (Sim)
Rudder Pedal Position (mm)
0.260
0.255
0.250
0.245
0.240
0.235
0.230
0.225
0.220
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)
Yaw: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
0.0
−2.5
−5.0
−7.5
−10.0
−12.5
−15.0
−17.5
−20.0
Manual Test (Reference)
Automatic Test (Sim)
Time (s)