Doc Number: 161310G00000-00	Doc Version: 008	Date: 02-Nov-2026

Super Mushshak Automatic Flight Test

Prepar3D v5 | Rahwali Airfield (OPRW) | Automatic Testing Mode

Super Mushshak Logger - ver. 1.0

Super Mushshak Airborne Automatic Testing Suite

Flight Test File: Super_Mushak_auto_takeoff_data_2026-11-02_13-21-16.csv

ONLINE, AUTOMATIC


Test Date: 02-Nov-2026 Test Time: 13:21:16


Initial Test Conditions


Validation	Sim	
***** Weight and Balance *****		
850.7	850.7	Gross Wt (kg)
111.5	111.5	Total Fuel Quantity (kg)
0.00	0.00	CG Pos in X Axis (mm)
0.00	0.00	CG Pos in Y Axis (mm)
***** Control Parameters *****		
20.2	20.2	Pitch Control Position (raw)
36.9	36.9	Roll Control Position (raw)
0.21	0.20	Rudder Pedal Position (raw)
100.0	100.0	Throttle Position (%)
-0.00	-21.0	Pitch Force: Applied/Virtual (N)
0.01	-14.6	Roll Force: Applied/Virtual (N)
0.01	-19.9	Yaw Force: Applied/Virtual (N)
***** Environment Parameters *****		
1013	1013	Baro Press (hPa)
8.40	8.40	OAT (deg C)
309.9	309.9	Wind Dir (mag,deg)
11.1	11.1	Wind Spd (kt)
***** Engine Parameters (Piston Engine) *****		
2700	2700	Engine Speed (RPM)
100.0	100.0	Throttle Position (%)
0.00	0.00	Fuel Flow (pph)
558.6	558.2	Exhaust Gas Temp (deg C)

Validation	Sim	
***** Flight Parameters *****		
80.9	81.0	Indicated Airspeed (kt)
97.2	97.2	Ground Speed (kt)
0.14	0.14	Mach Number (-)
4079	4079	Pressure Alt (ft)
3344	3341	Radar Alt (ft)
750.0	750.0	Height of Terrain (ft)
531.3	531.3	Vertical Velocity (ft/min)
-7.64	-7.64	Pitch Angle (deg)
0.19	0.19	Bank Angle (deg)
77.2	77.2	Heading (deg)
4.12	4.12	Aircraft Angle of Attack (deg)
13.2	13.3	Sideslip Angle (deg)
95.4	259.2	Track Angle (deg)
-0.11	-0.11	Roll Rate (deg/s)
0.00	0.00	Pitch Rate (deg/s)
-1.04	-1.04	Yaw Rate (deg/s)
0.21	0.18	X Body Acceleration (g)
-0.00	0.15	Y Body Acceleration (g)
-0.27	-0.23	Z Body Acceleration (g)


1st Quadrant Combined Group 1 (Airspeed, Climb, Altitude)

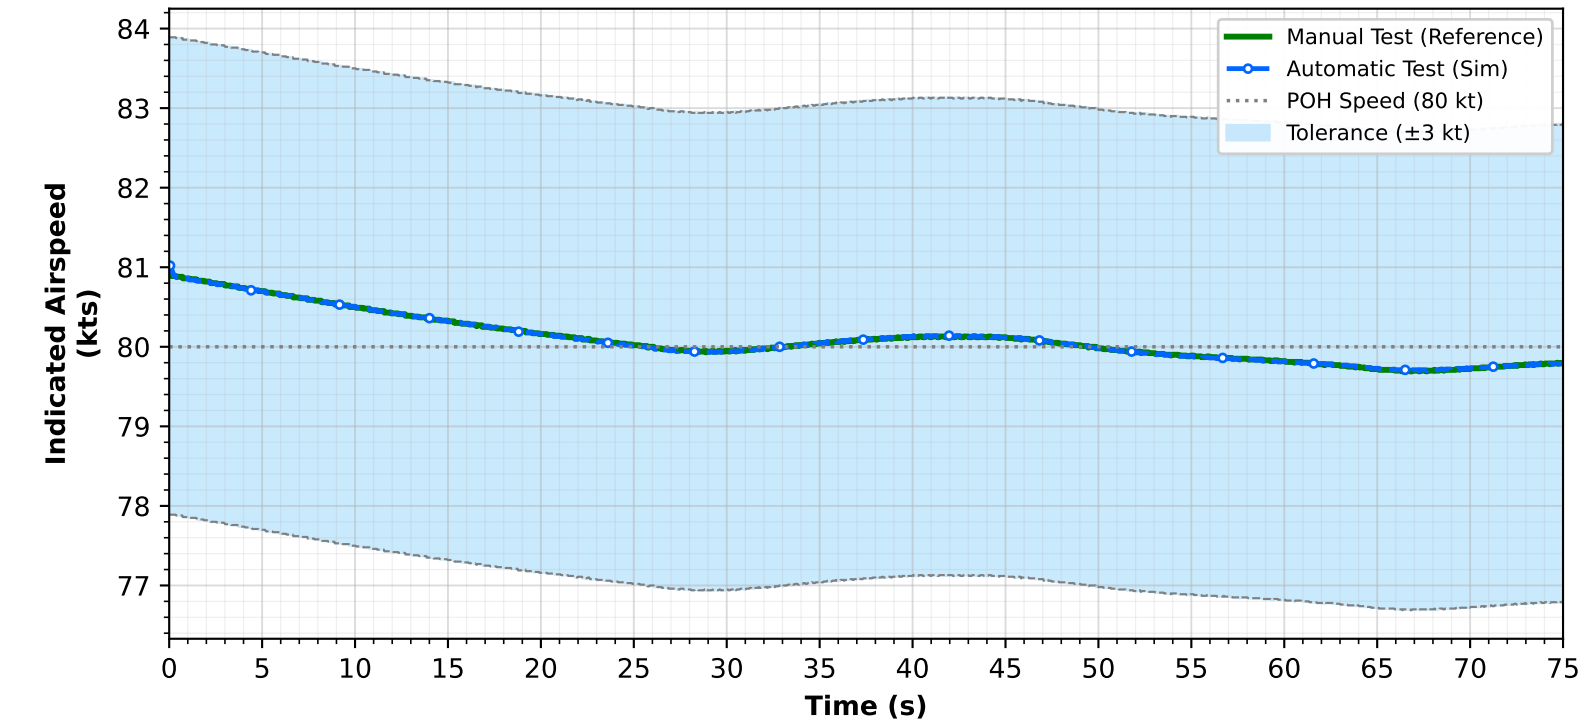


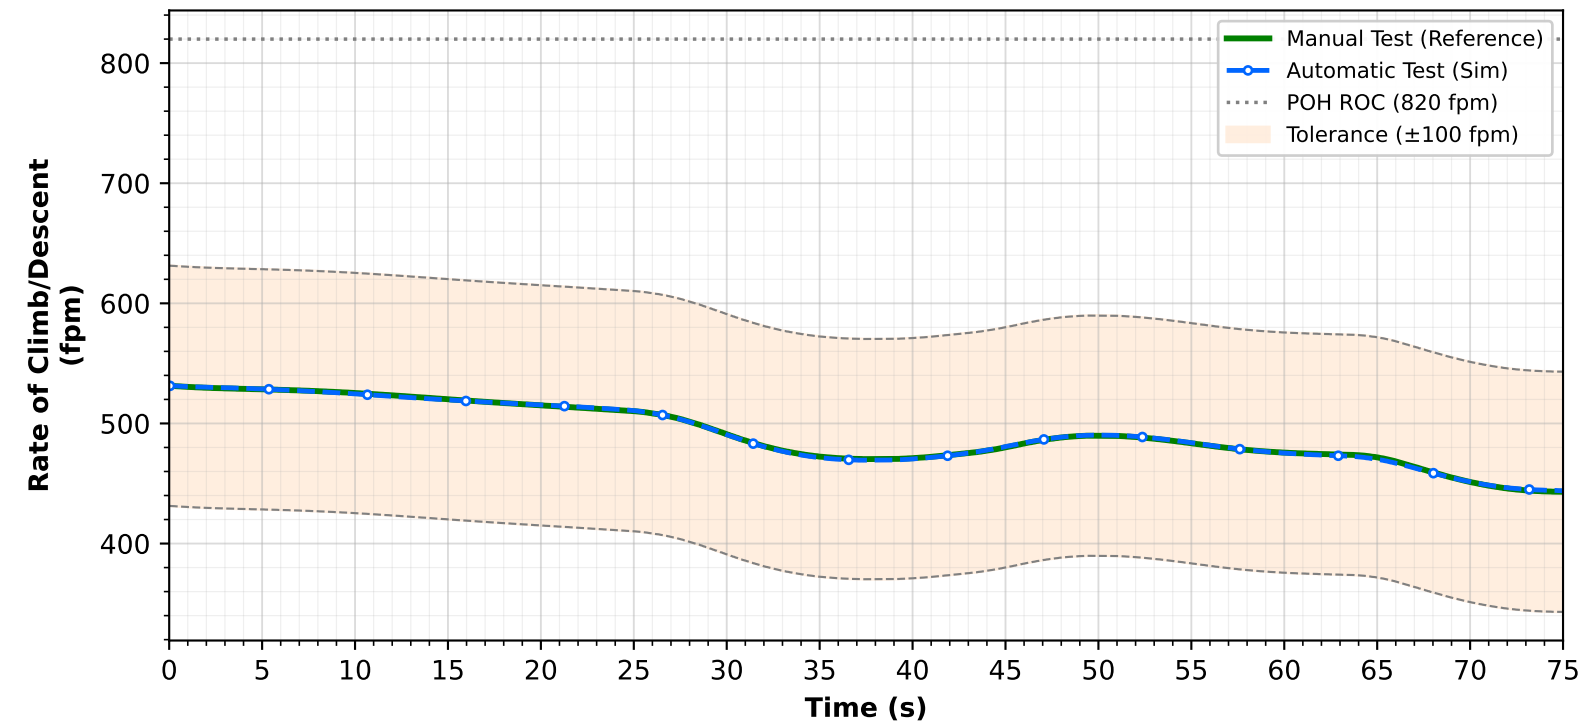


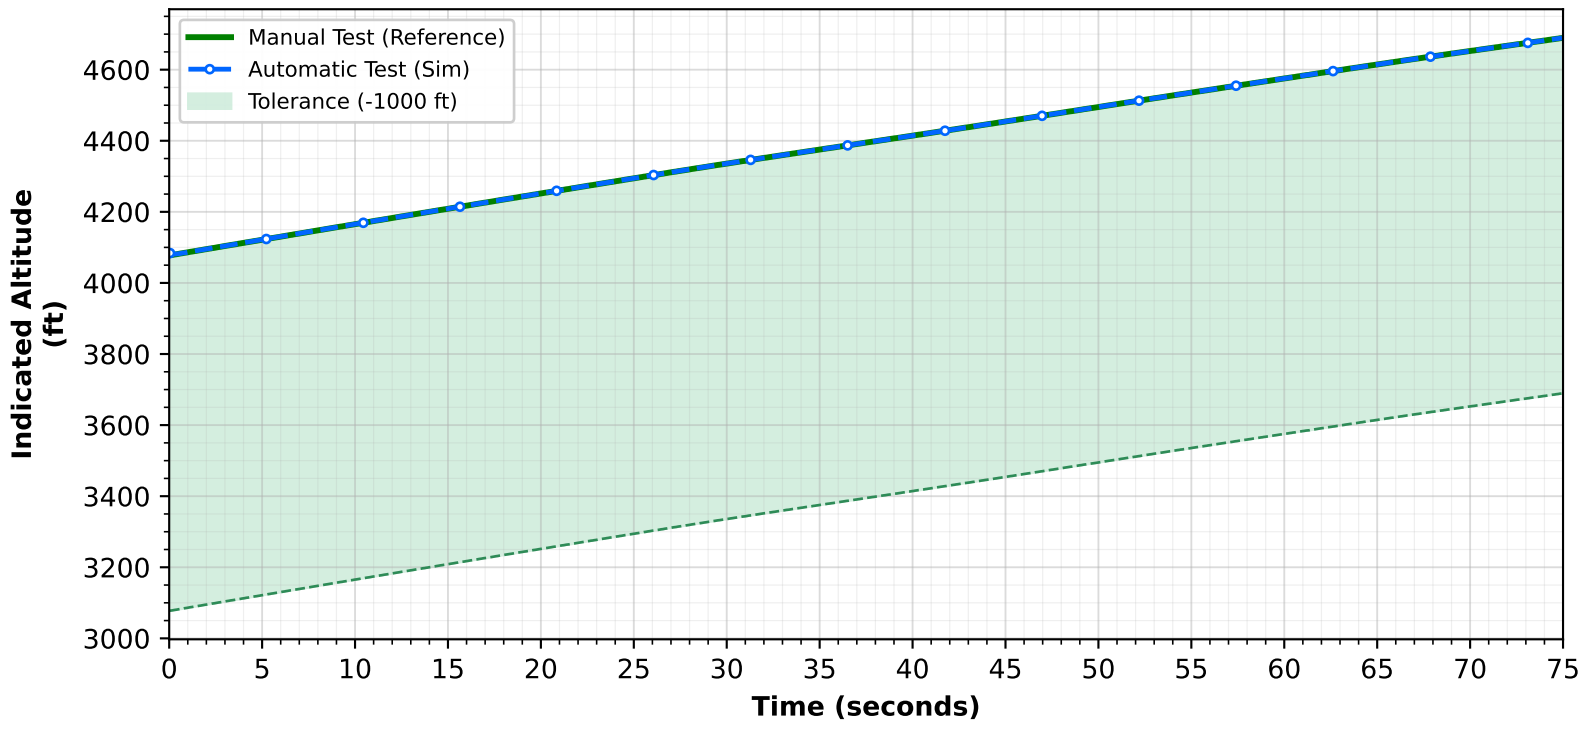



1st Quadrant Combined Group 2 (Pitch, Bank, Yaw, Heading)

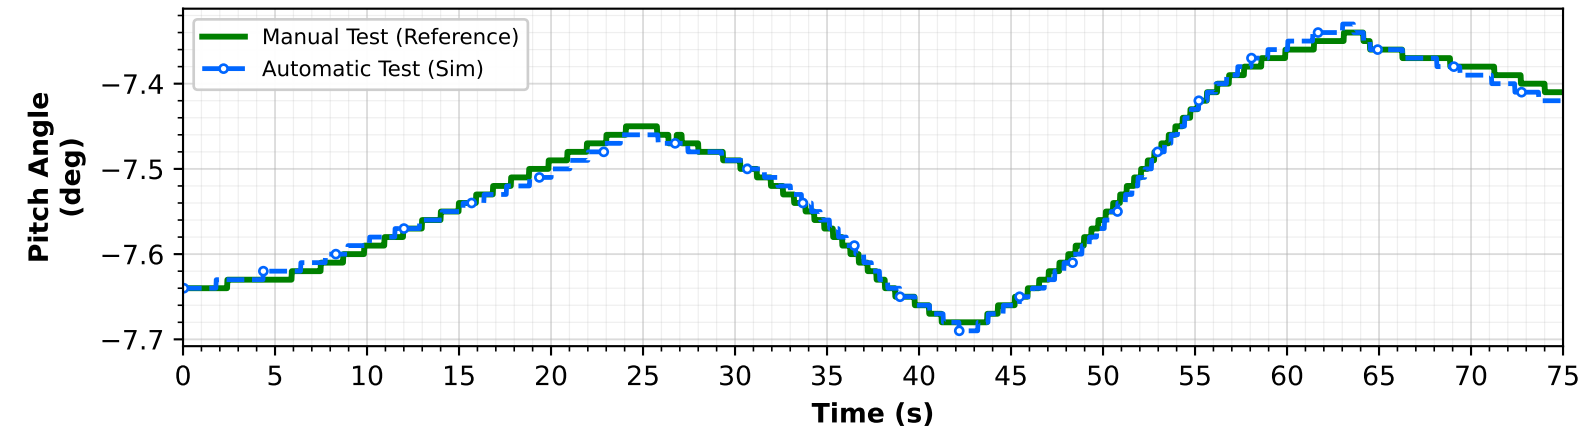

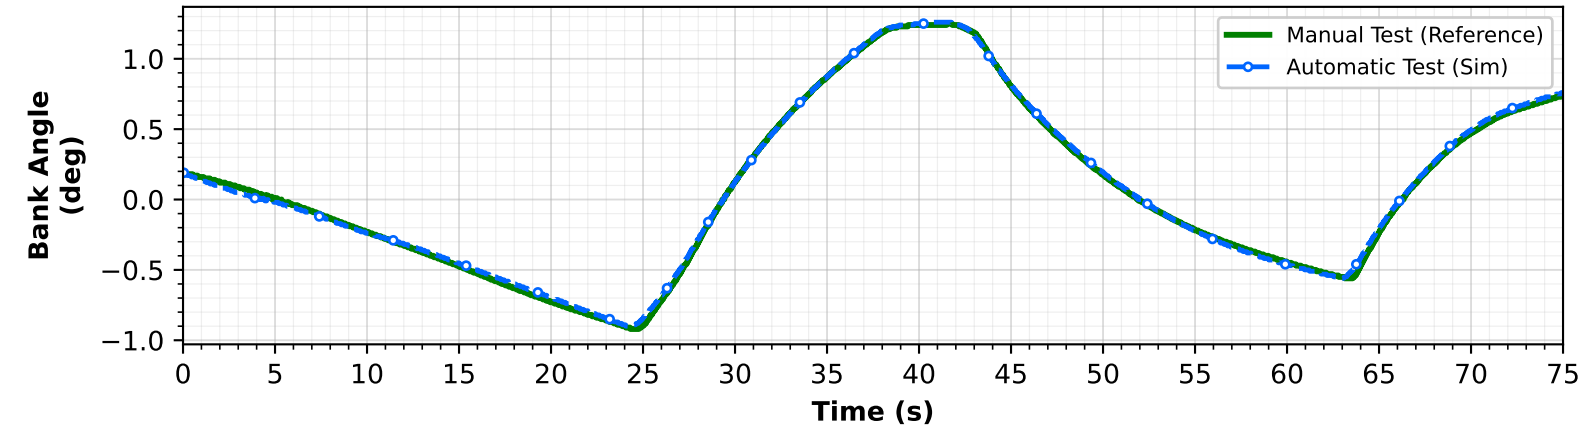


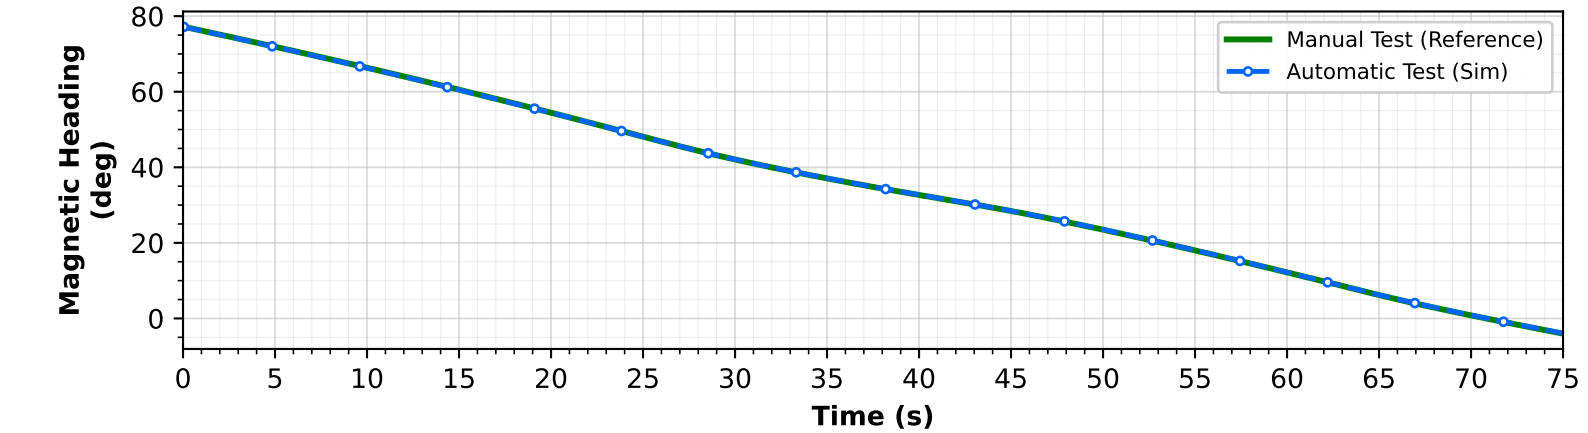


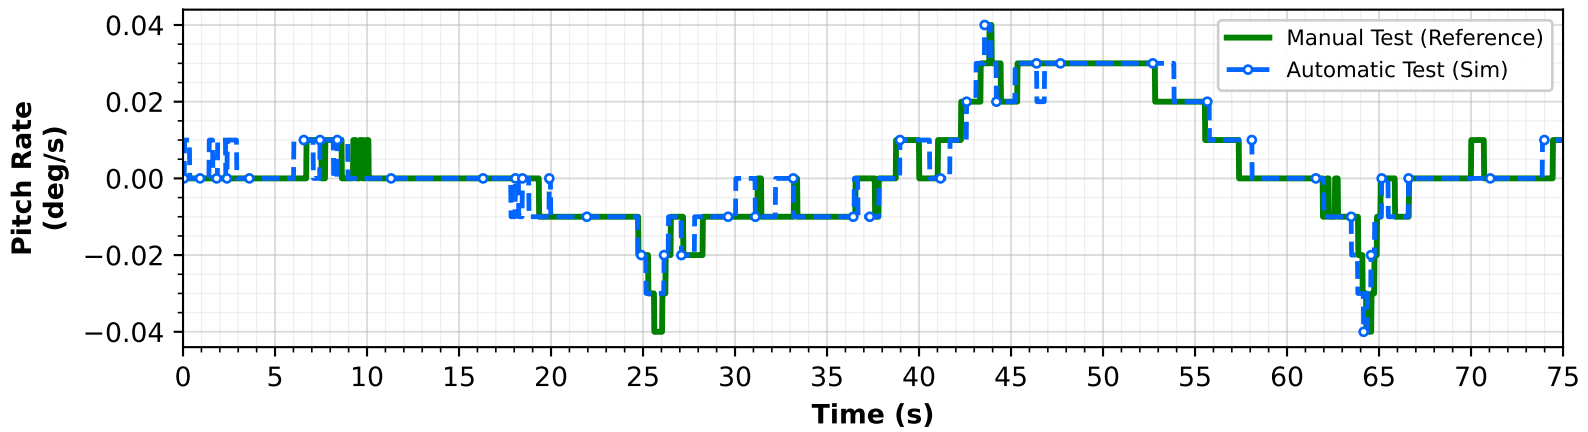


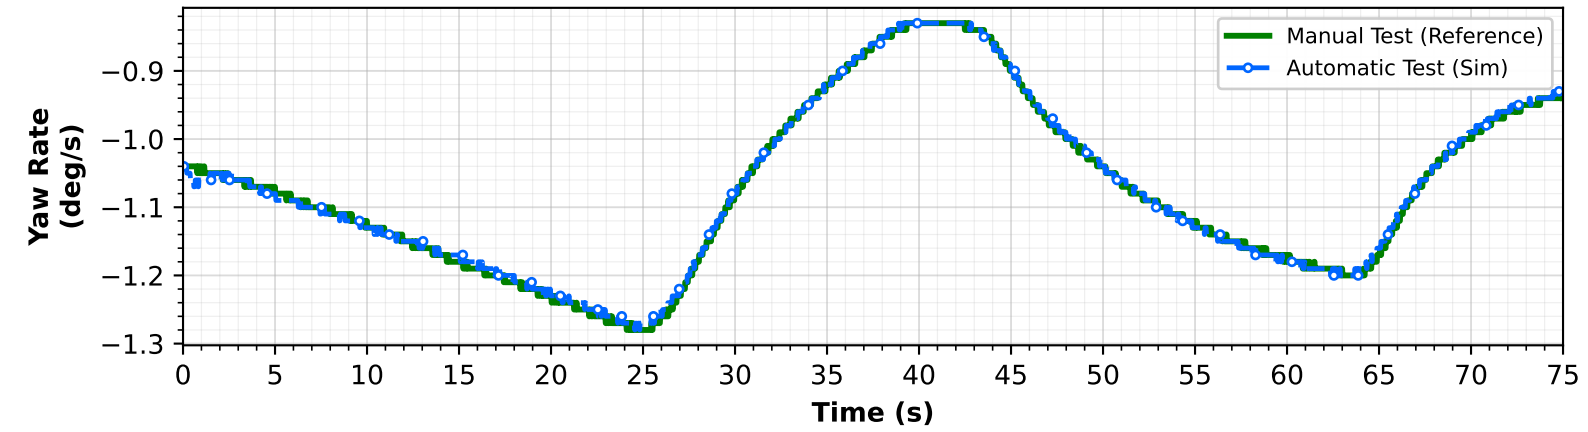



1st Quadrant Combined Group 3 (Propeller, Engine, Throttle)

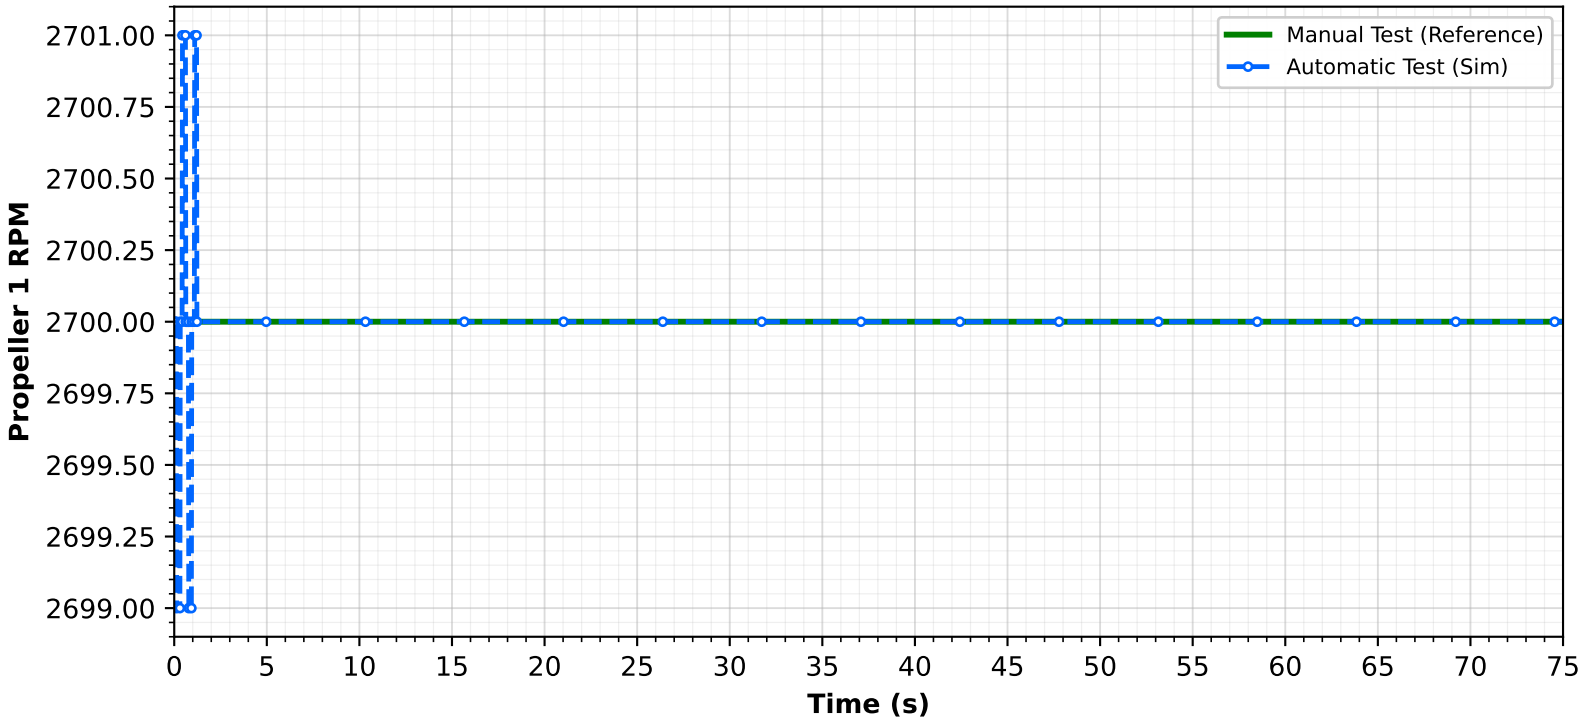

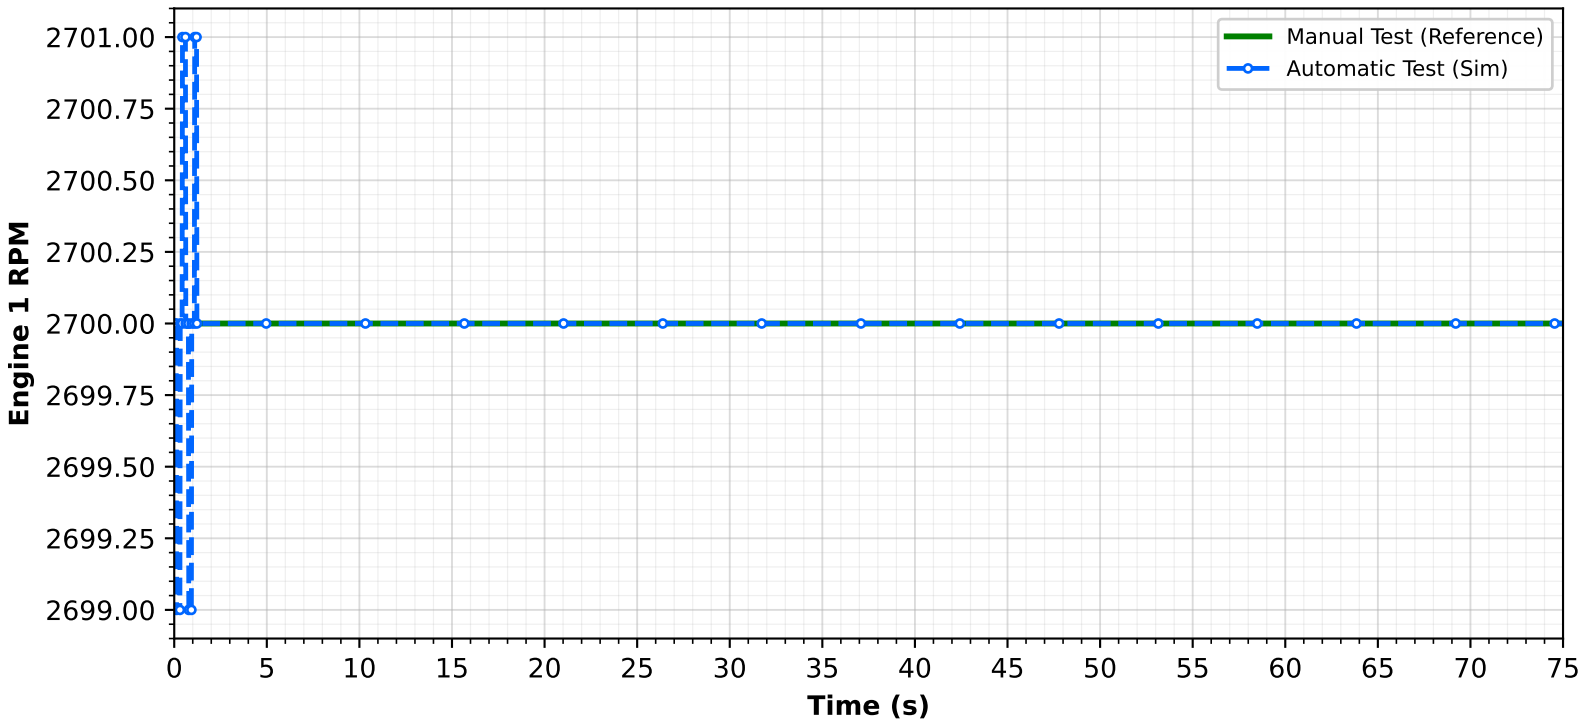

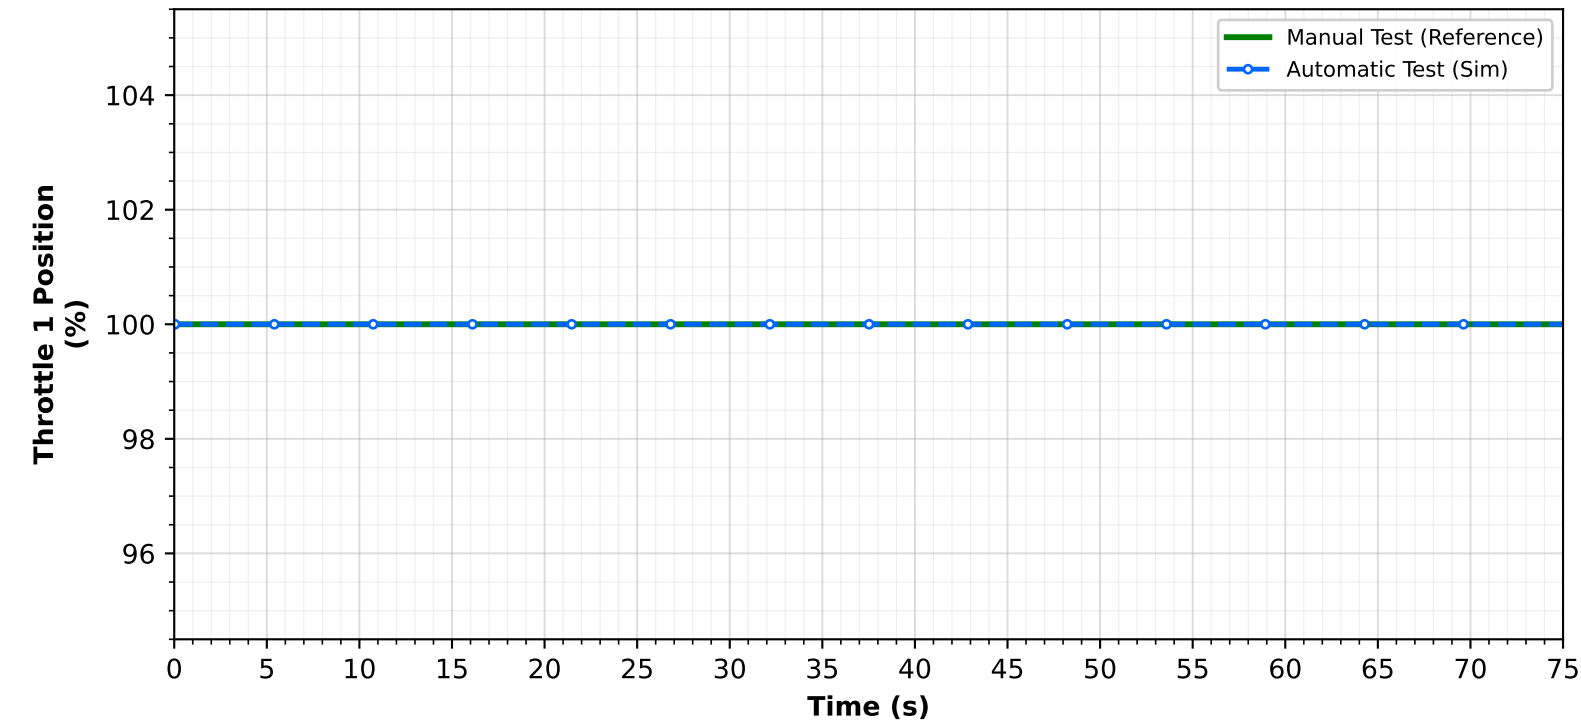

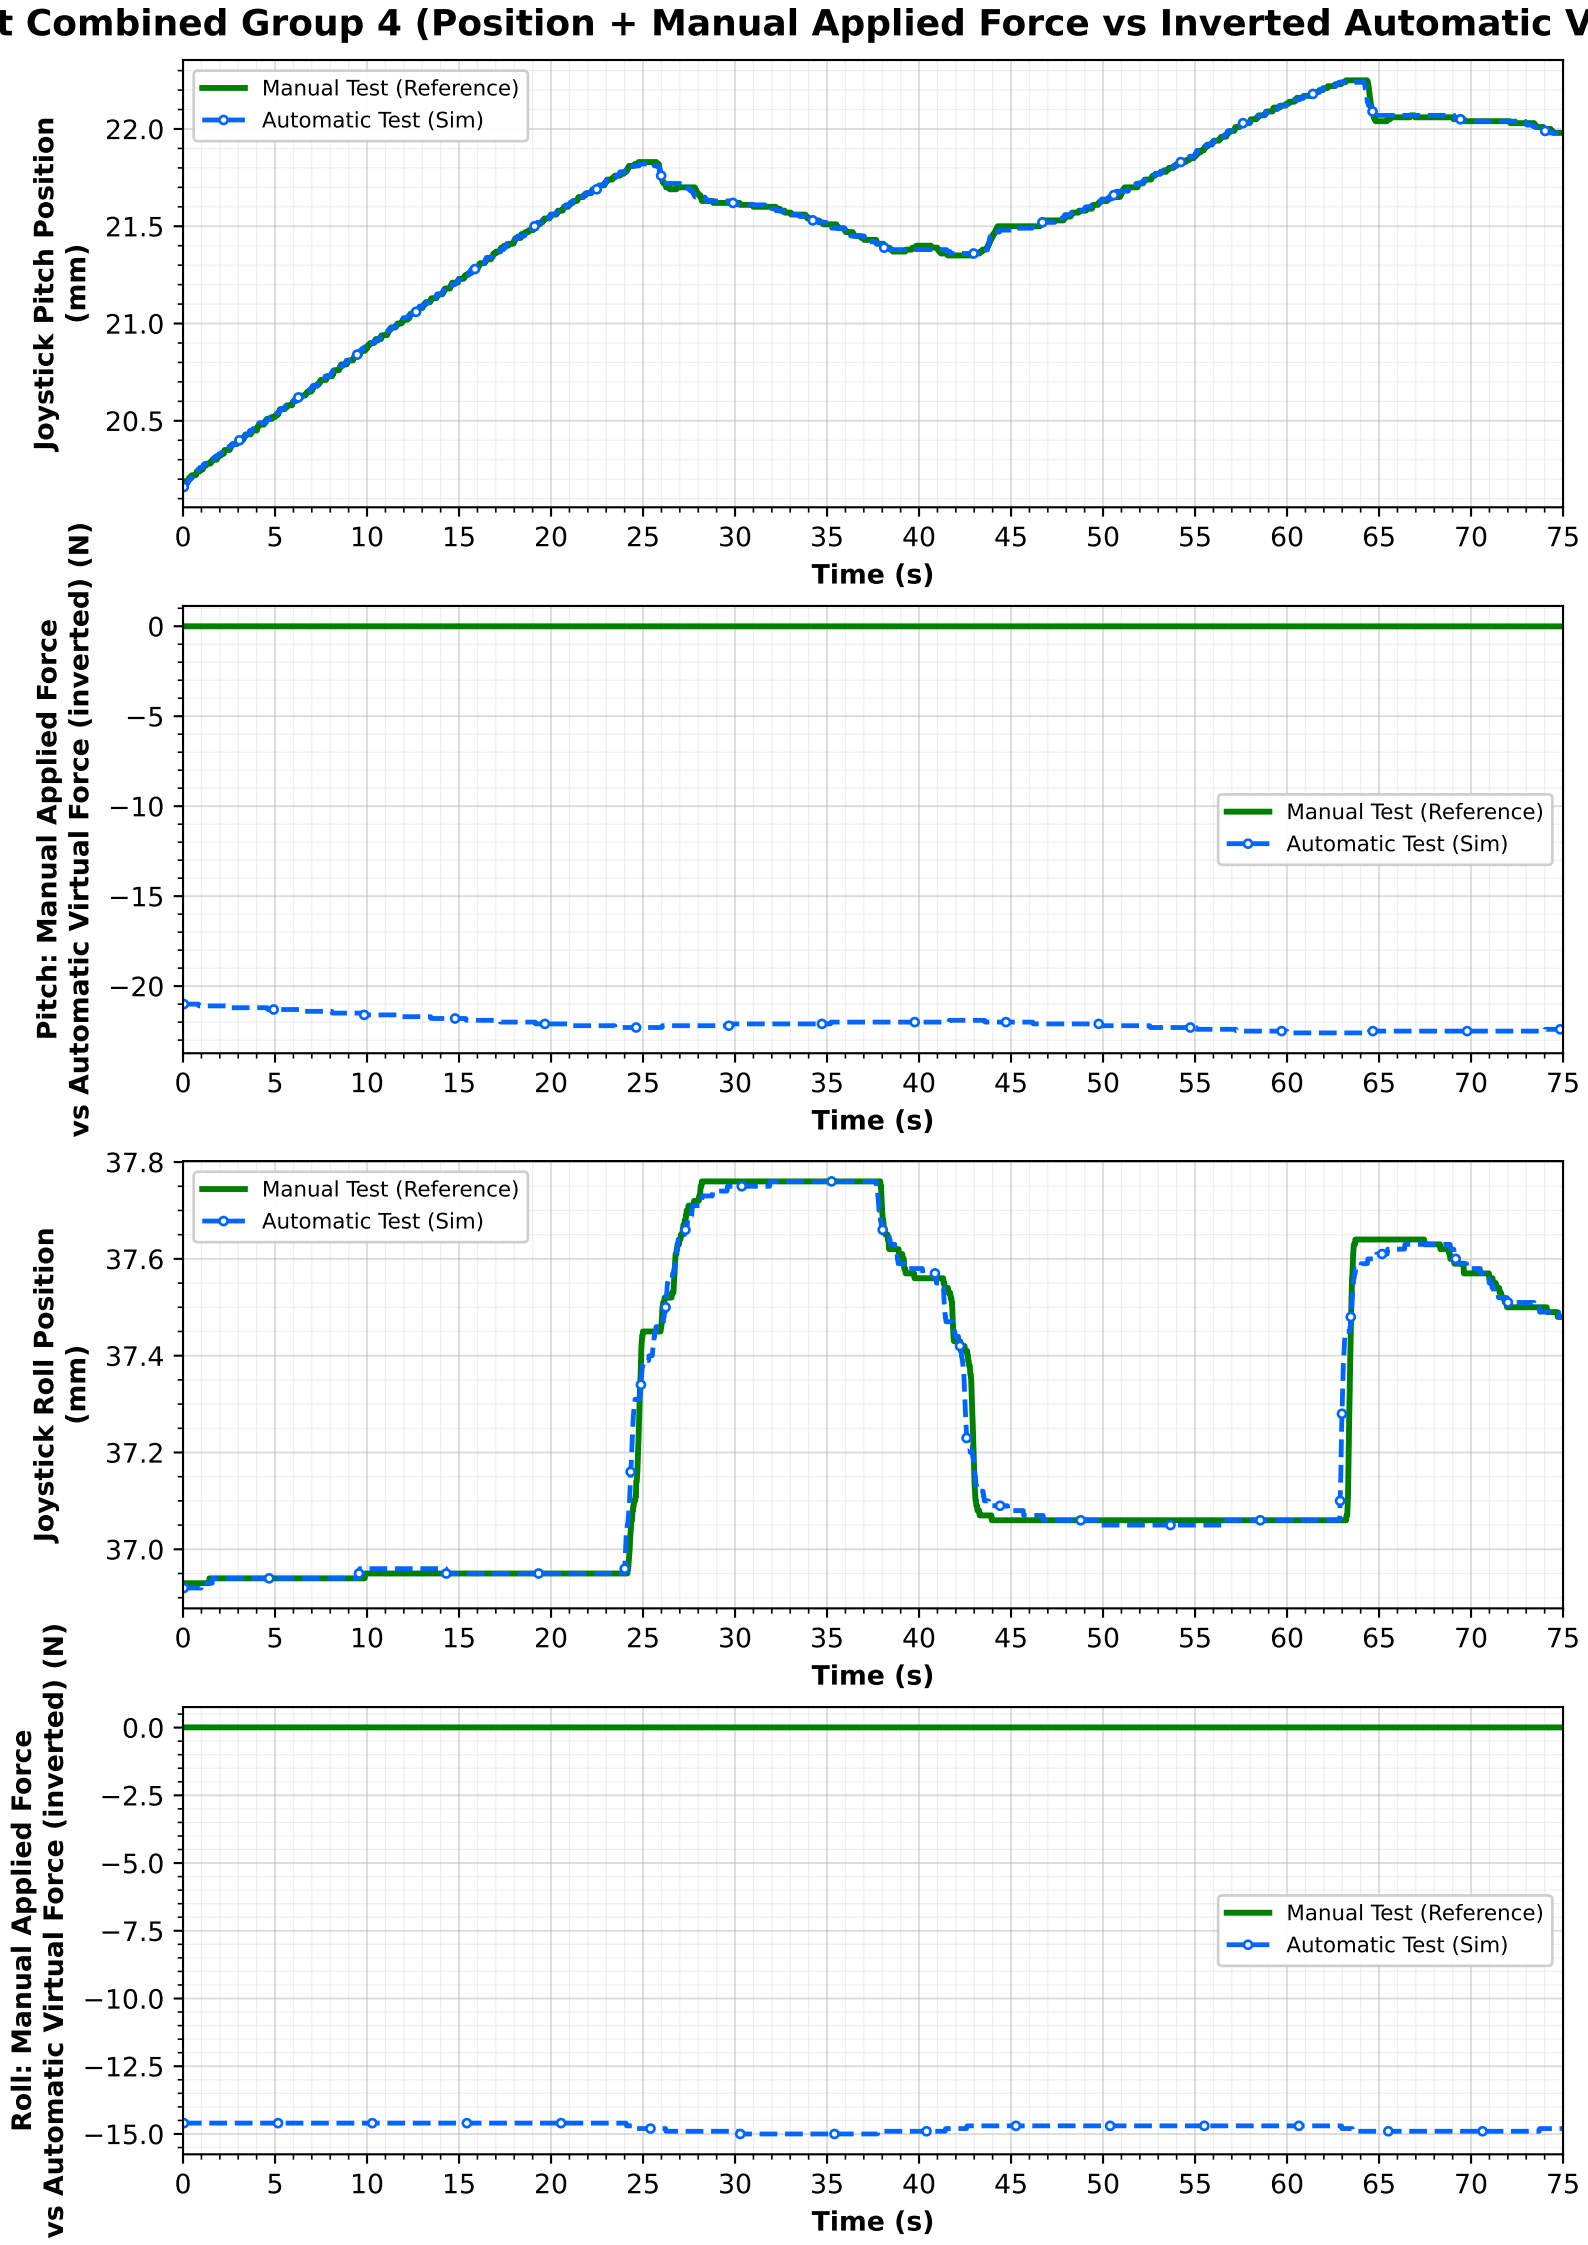
t Combined Group 4 (Position + Manual Applied Force vs Inverted Automatic V
Joystick Pitch Position (mm)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Pitch: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Joystick Roll Position (mm)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)
Roll: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
Manual Test (Reference)
Automatic Test (Sim)
Time (s)

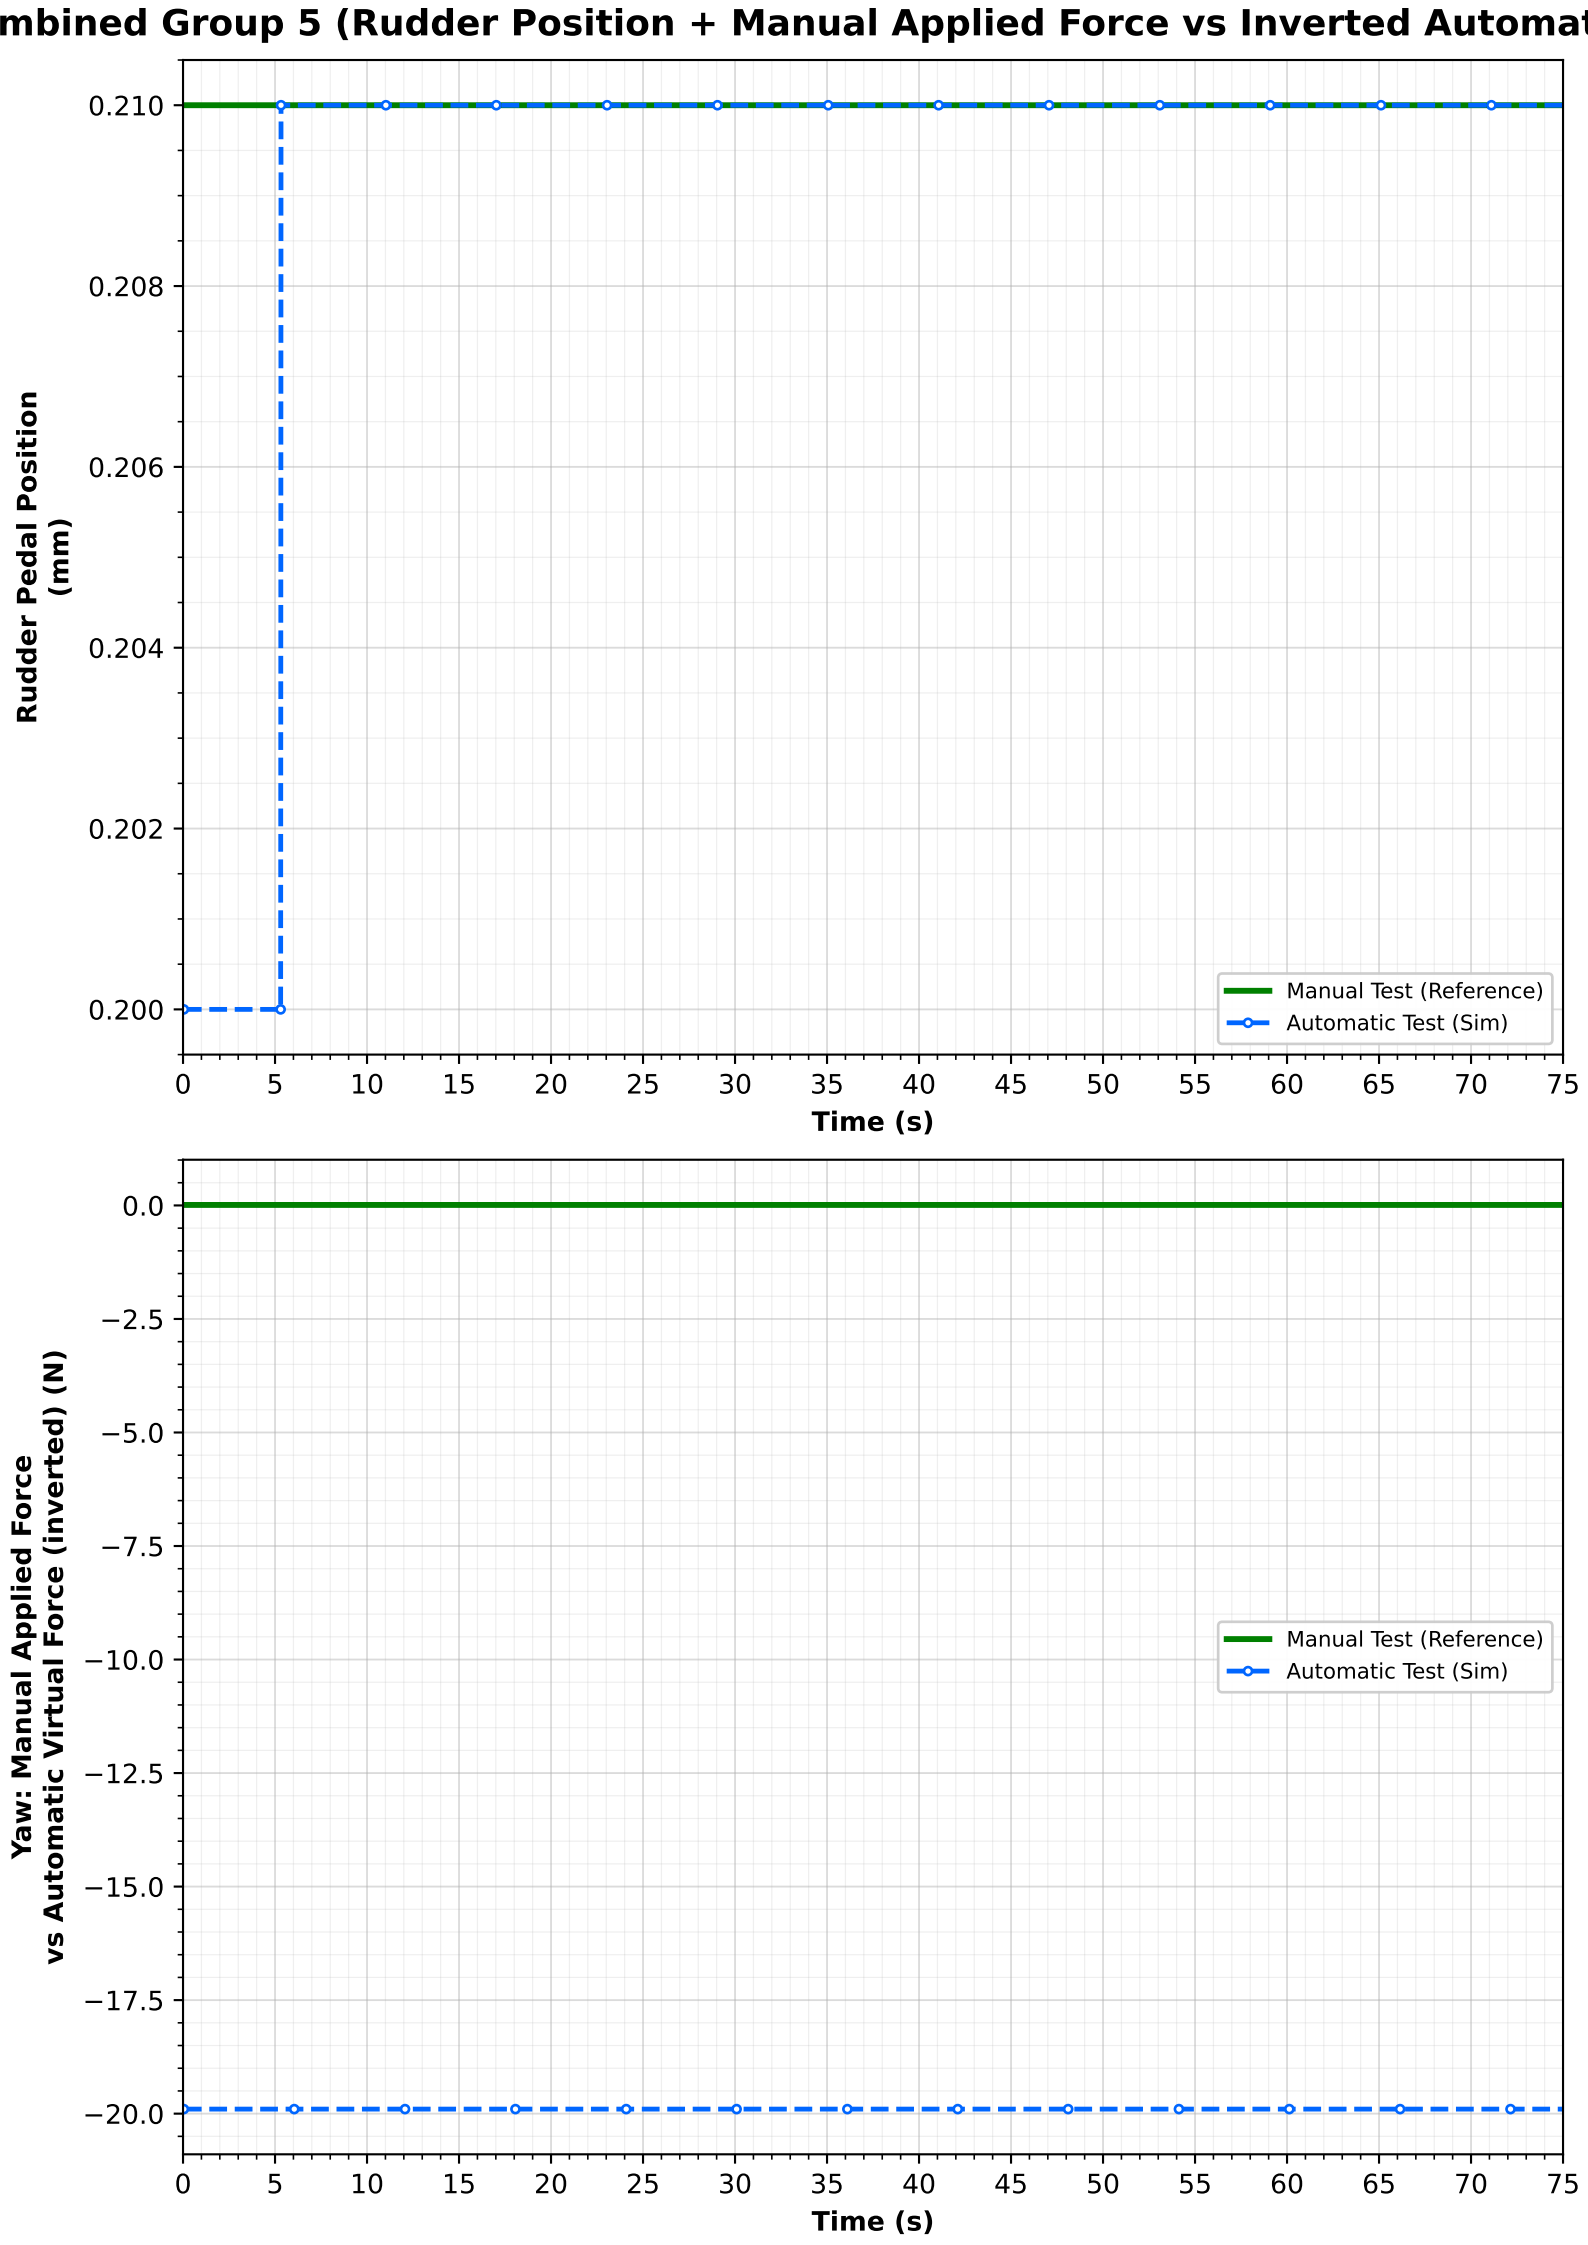
mbined Group 5 (Rudder Position + Manual Applied Force vs Inverted Automat
Rudder Pedal Position (mm)
0.210
0.208
0.206
0.204
0.202
0.200
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)
Manual Test (Reference)
Automatic Test (Sim)
Yaw: Manual Applied Force vs Automatic Virtual Force (inverted) (N)
0.0
−2.5
−5.0
−7.5
−10.0
−12.5
−15.0
−17.5
−20.0
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
Time (s)
Manual Test (Reference)
Automatic Test (Sim)