Doc Number: 161310G00000-00	Doc Version: 008	Date: 02-Nov-2026

Super Mushshak Engine Deceleration Manual Test

Prepar3D v5 | Rahwali Airfield (OPRW) | Manual Testing Mode

Super Mushshak Logger - ver. 1.0

Super Mushshak Engine Manual Testing Suite

Flight Test File: Super_Mushak_manual_takeoff_data_2026-11-02_10-22-41_legacy_plot.csv

ONLINE, MANUAL

Test Date: 02-Nov-2026 Test Time: 10:22:41

Initial Recorded Conditions


	Sim
***** Engine Parameters (Piston Engine) *****	
Engine 1	
100.0 Throttle Position (%)	
2706 Engine Speed (RPM)	
2706 Propeller Speed (RPM)	
27.3 Manifold Pressure (inHg)	
96.1 Fuel Flow (lb/h)	

	Sim
***** Ground Parameters *****	
4.60 Ground Speed (kt)	
***** Environment Parameters *****	
1013 Baro Press (hPa)	
15.0 OAT (deg C)	
0.00 Wind Dir (mag,deg)	
0.00 Wind Spd (kt)	
***** Sim Systems *****	
Off Primary Motion (-)	
Off Secondary Motion (-)	
- Sound Level (-)	
50 Vibration Level (%)	


Time zero: measured throttle movement in each run.


Source: Super_Mushak_manual_takeoff_data_2026-11-02_10-22-41_legacy_plot.csv


1st Quadrant Combined Group 1 - Ground Speed

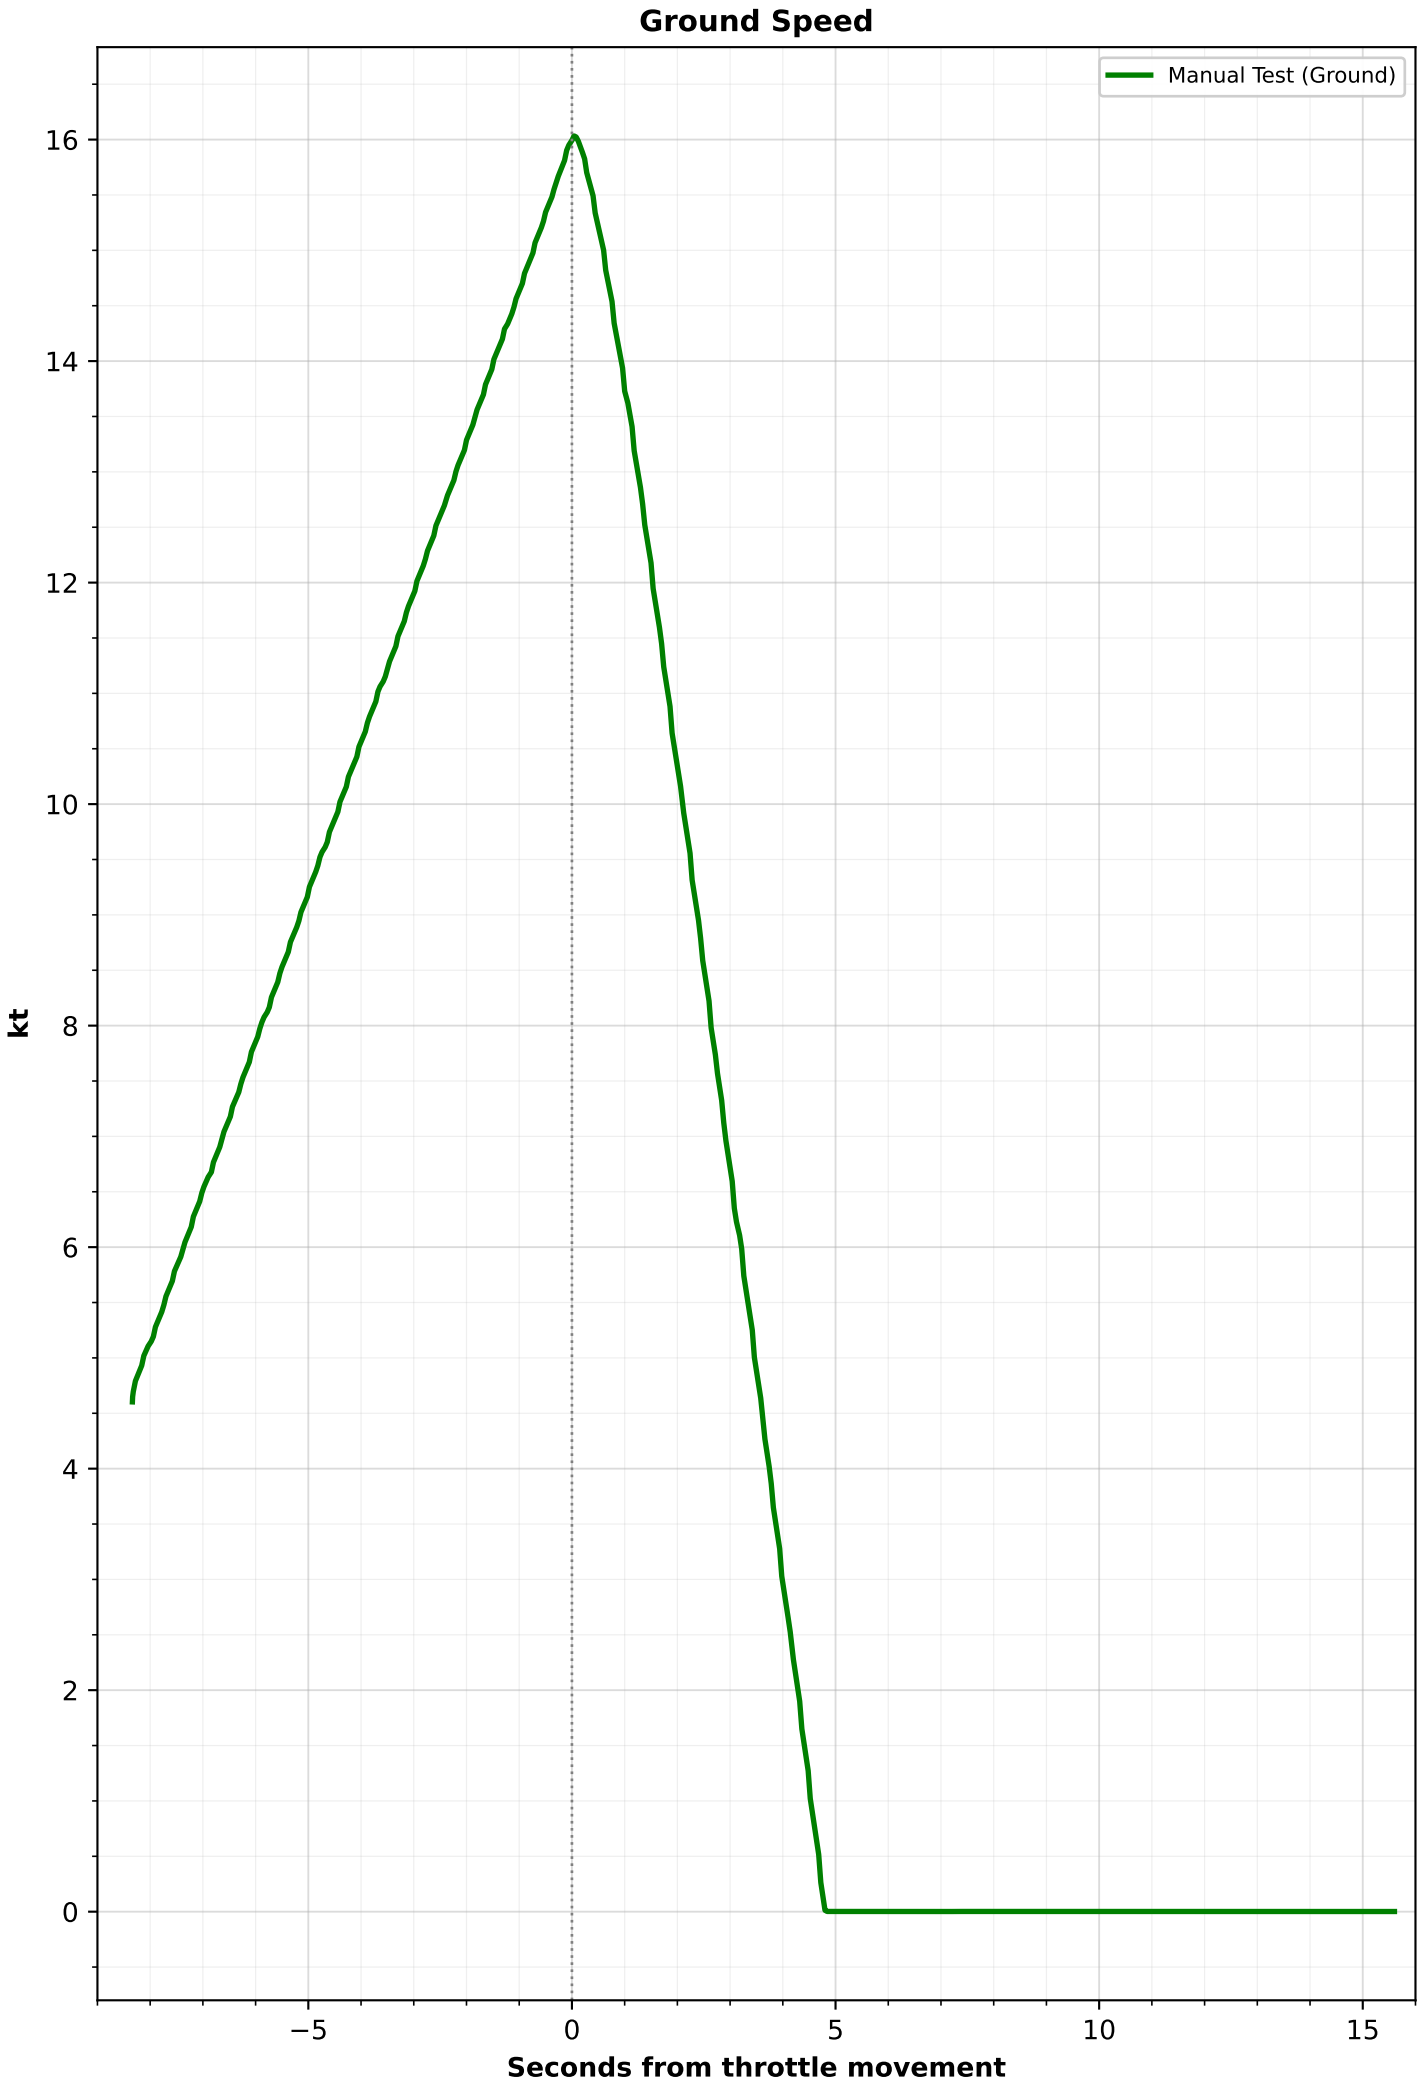


1st Quadrant Combined Group 2 - Throttle and Engine Response

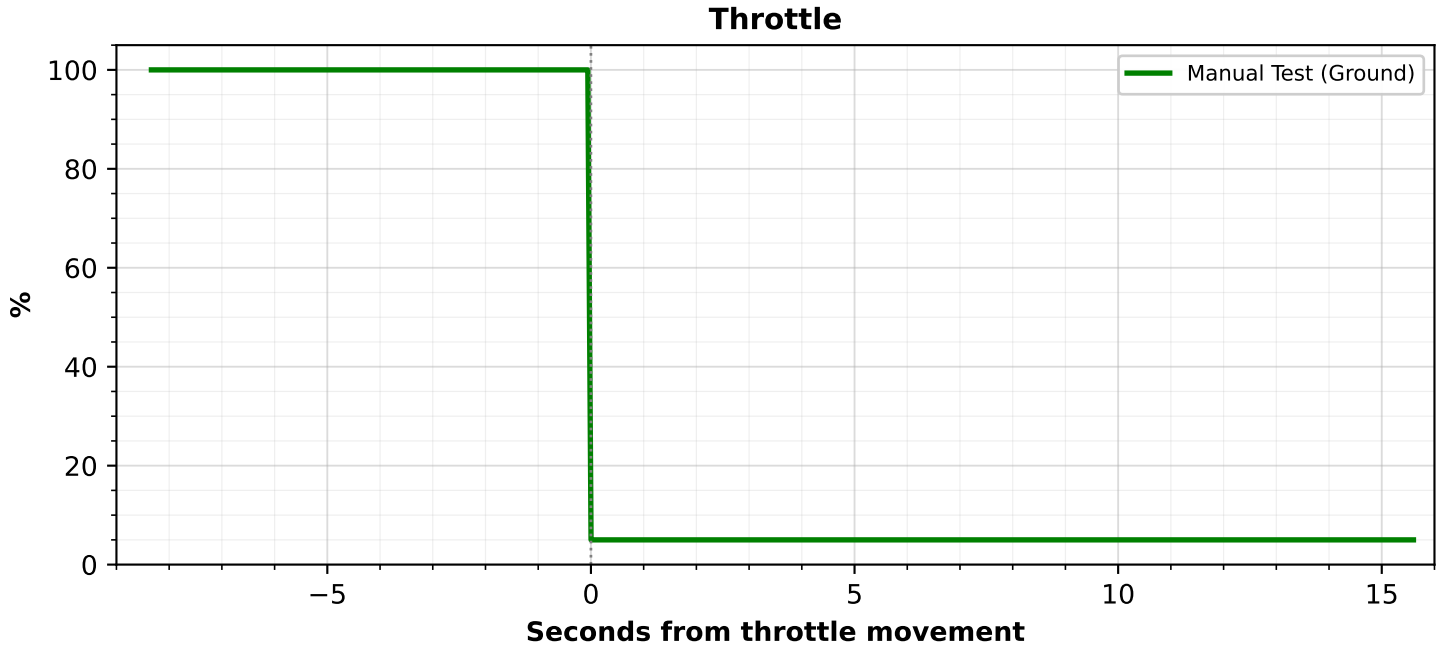


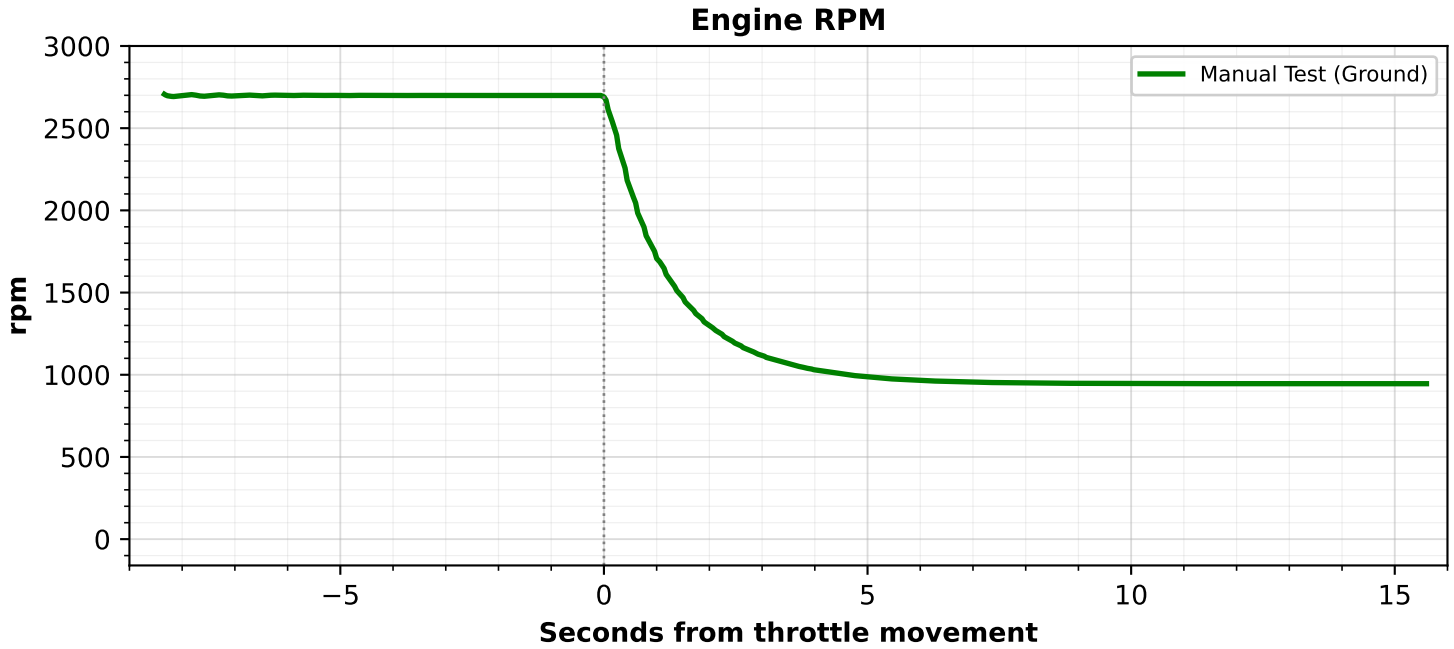

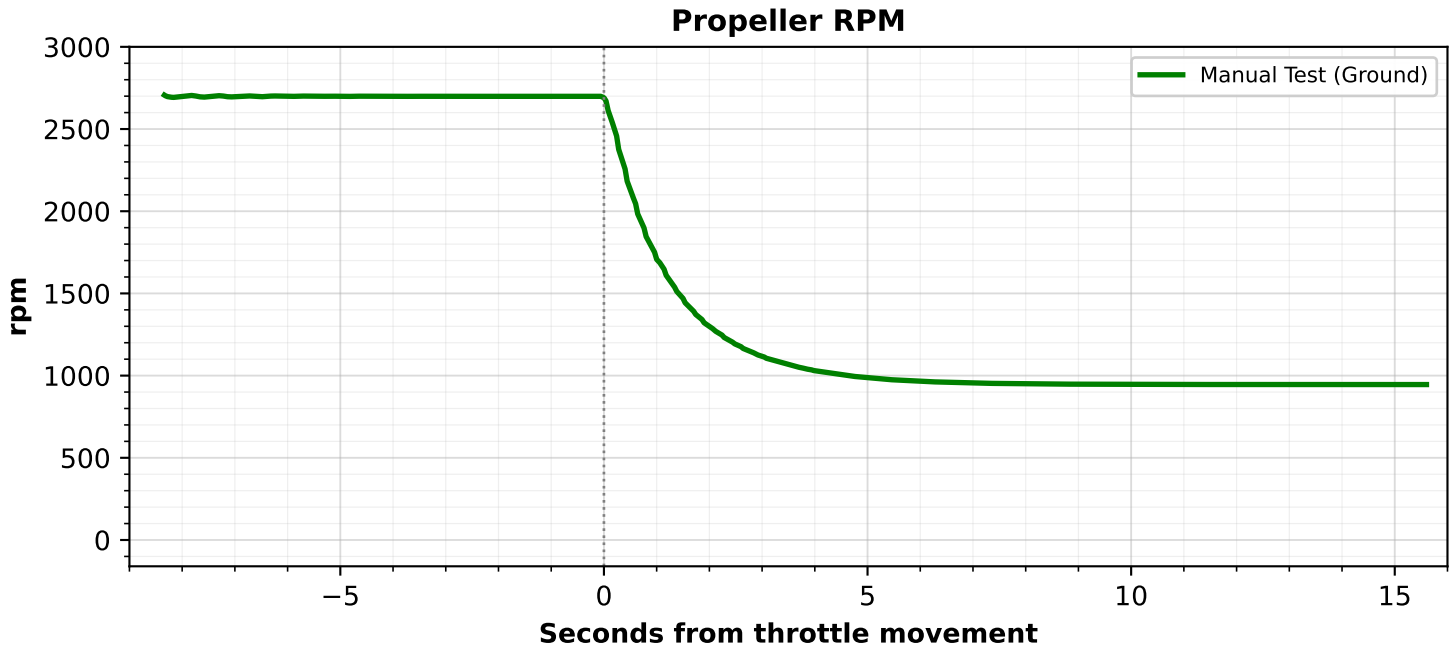

1st Quadrant Combined Group 3 - Engine Power Parameters

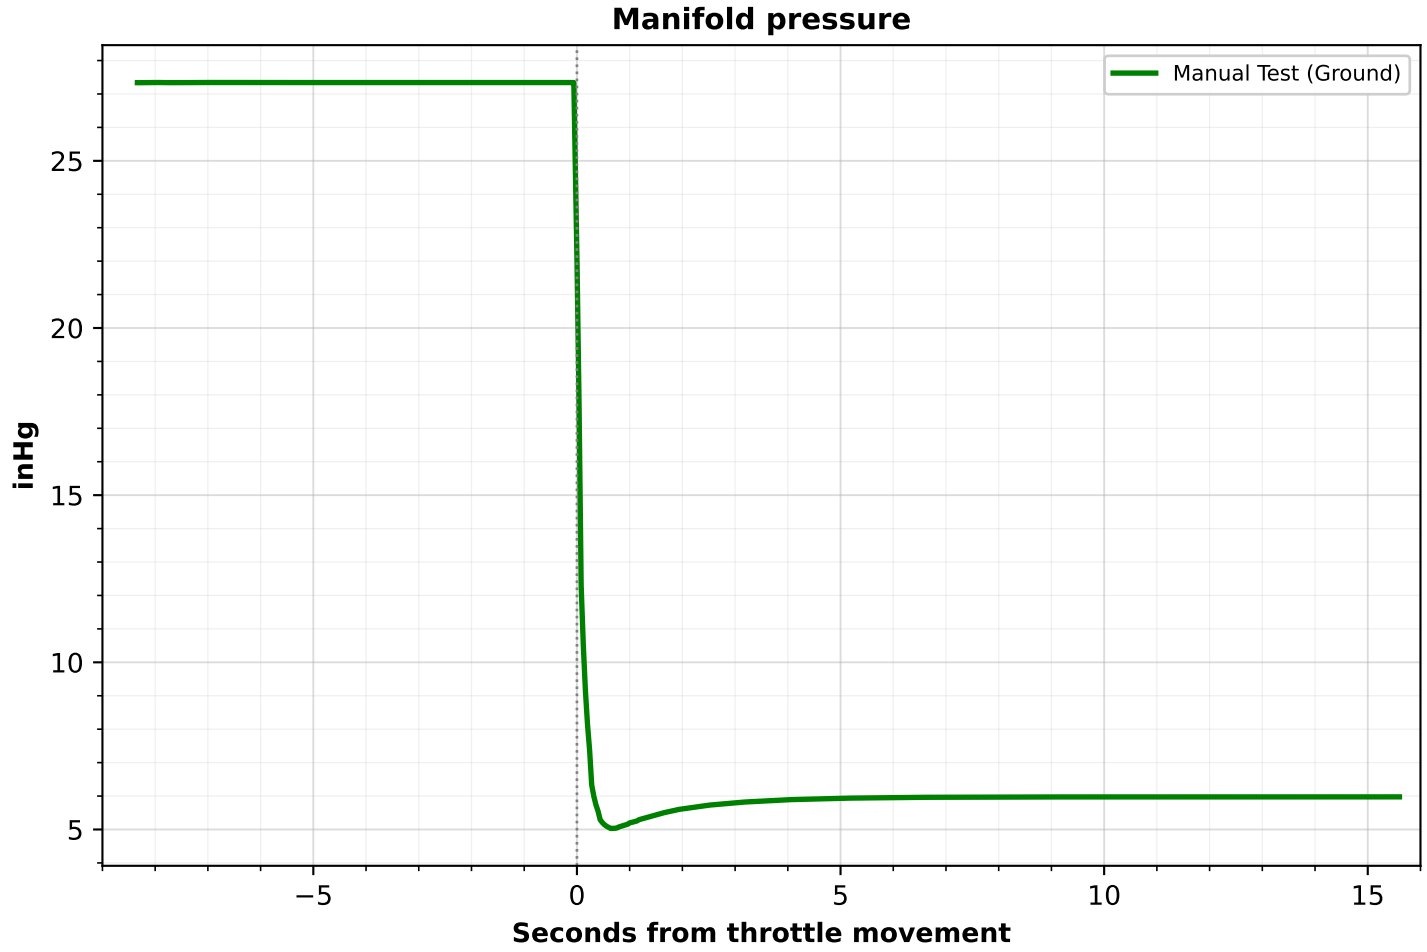

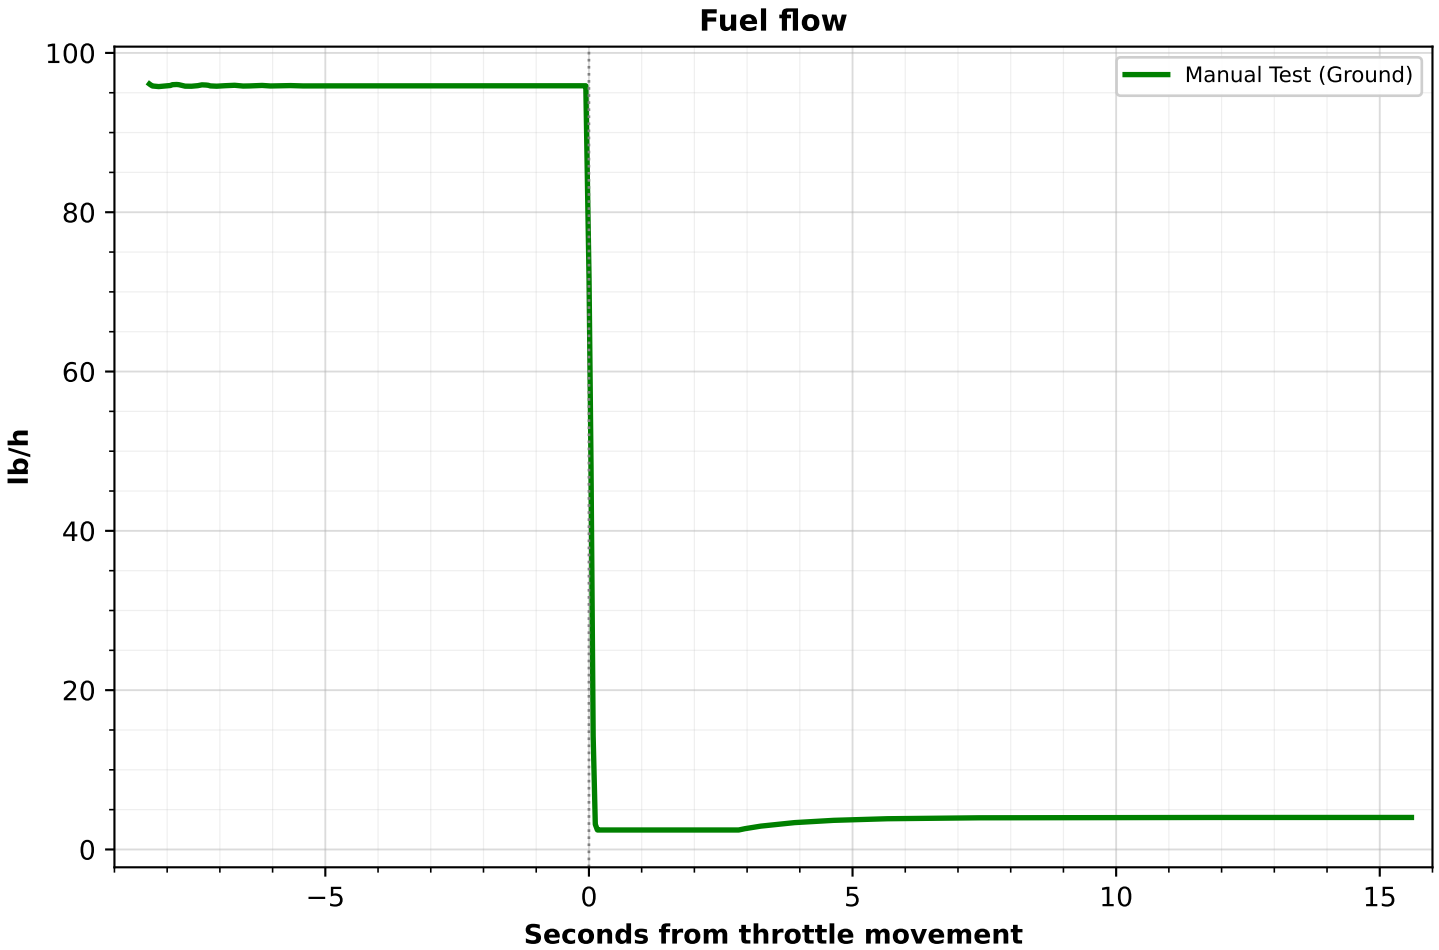

Super Mushshak Engine Deceleration - Ti / Tt Response Analysis
Engineering timing check - CS-FSTD(A) Issue 2, 1.f method

Metric	Manual	Automatic	Difference	Compare band	Result
Ti (10% response)	0.023 s	N/A	N/A	+/-0.25 s	Manual only
Tt (90% response)	0.260 s	N/A	N/A	+/-0.03 s	Manual only

Timing/repeatability: MEASURED

Channel: Manifold pressure (inHg)

Comparison bands: Ti = max(10% of Manual Ti, 0.25 s); Tt = 10% of Manual Tt (engineering comparison only).

