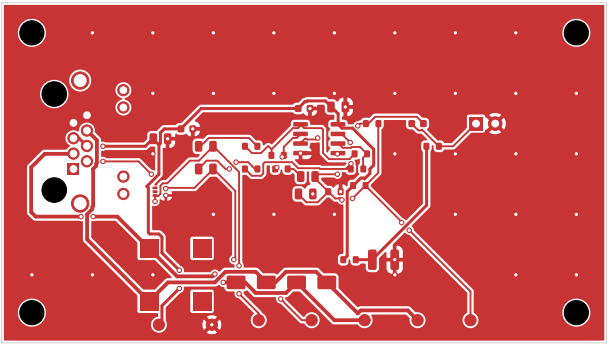

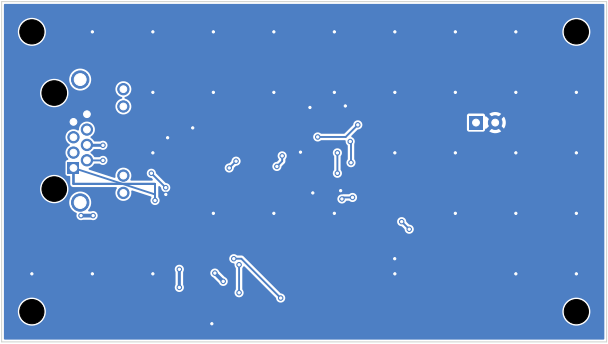
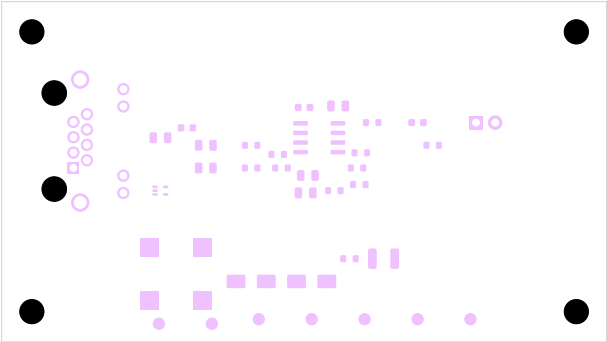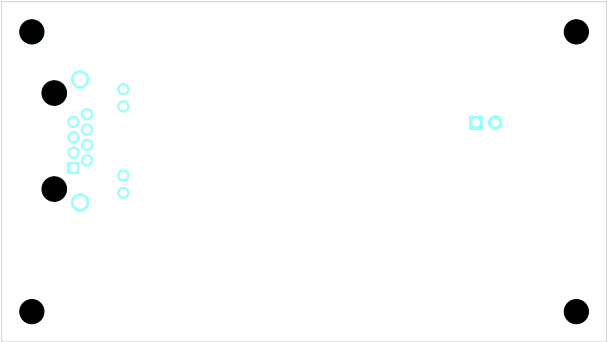
NOT ETHERNET — CUSTOM 5V AUDIO PINOUT
crow-mic-pod-v2 MIC POD (board a)
J1: 1,2=AUD+/− 3,6=+5VBEEP/RET 4,5=+5V 7,8=GND
MK1
MIC
MK1 ELECTRET (+ to R2)
J1 NOT ETHERNET
J1
LS1
TP1 +5V
GND
TP2 A+
TP3 A−
TP4 5VBP
TP5 RET
TP6 VMID
TP7