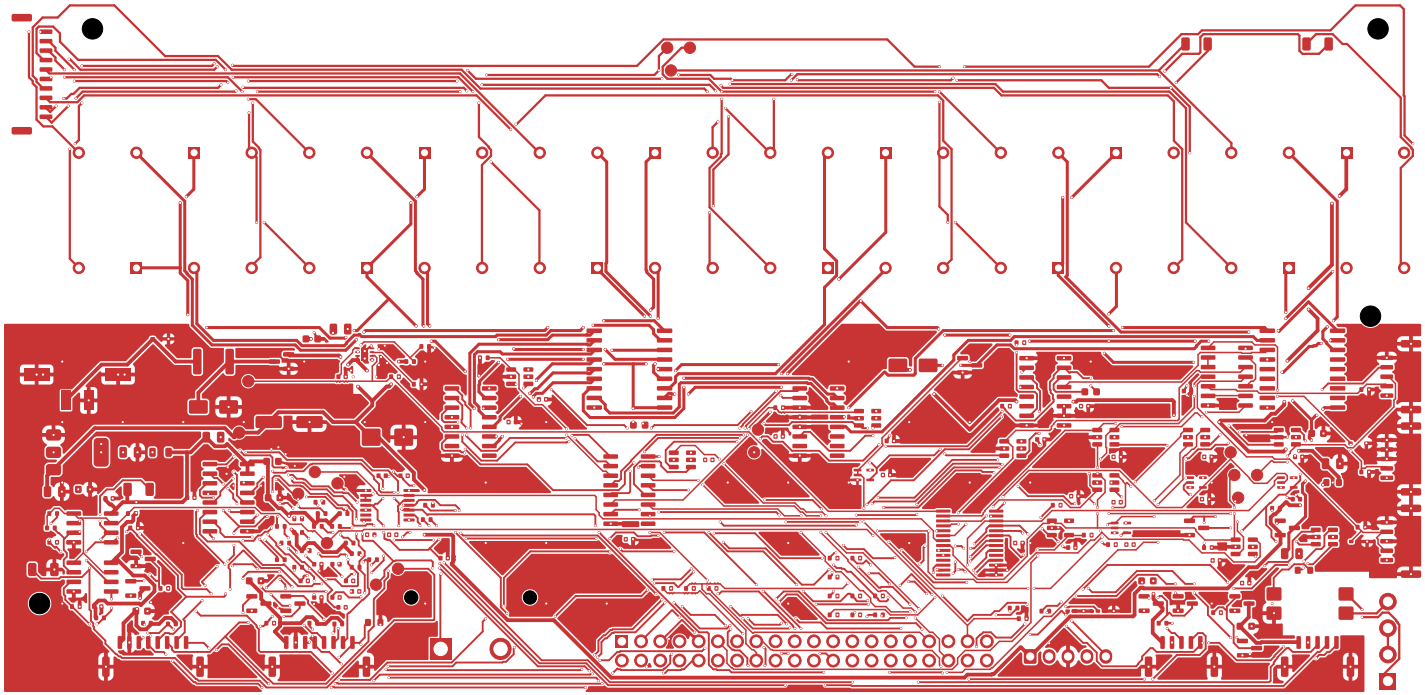

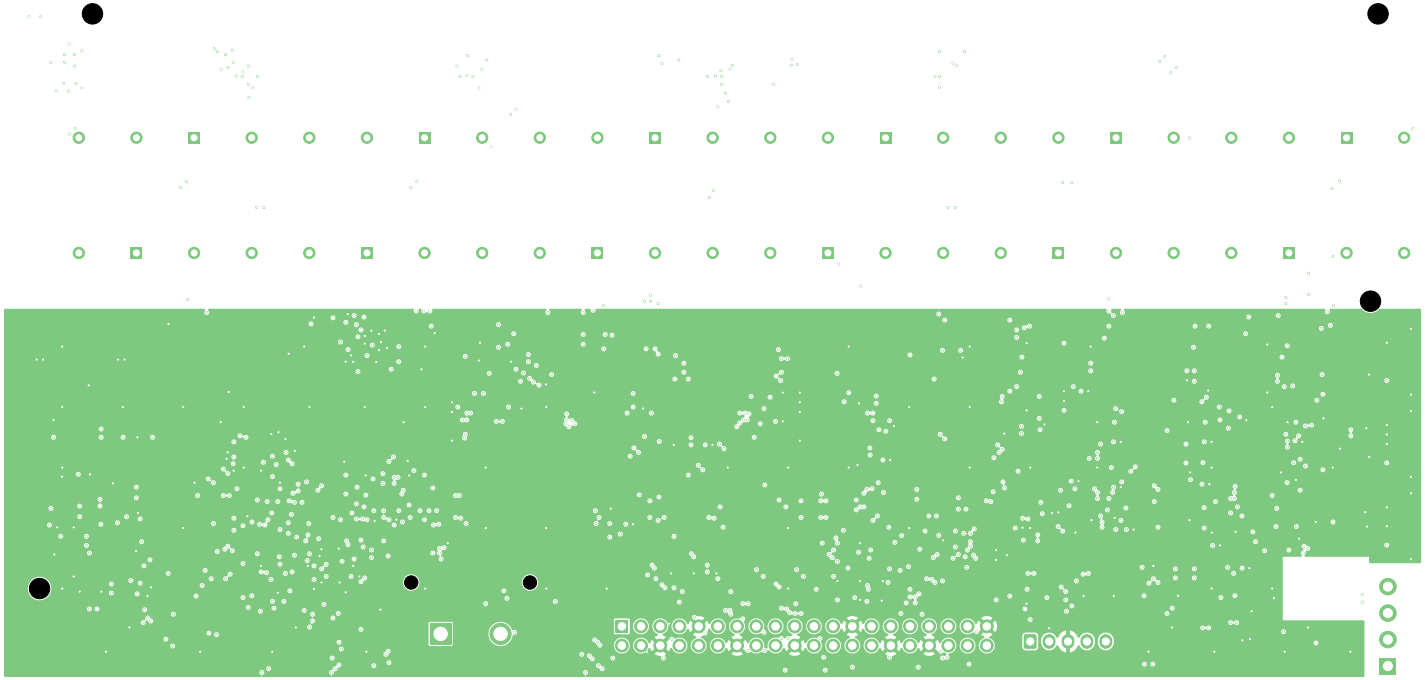

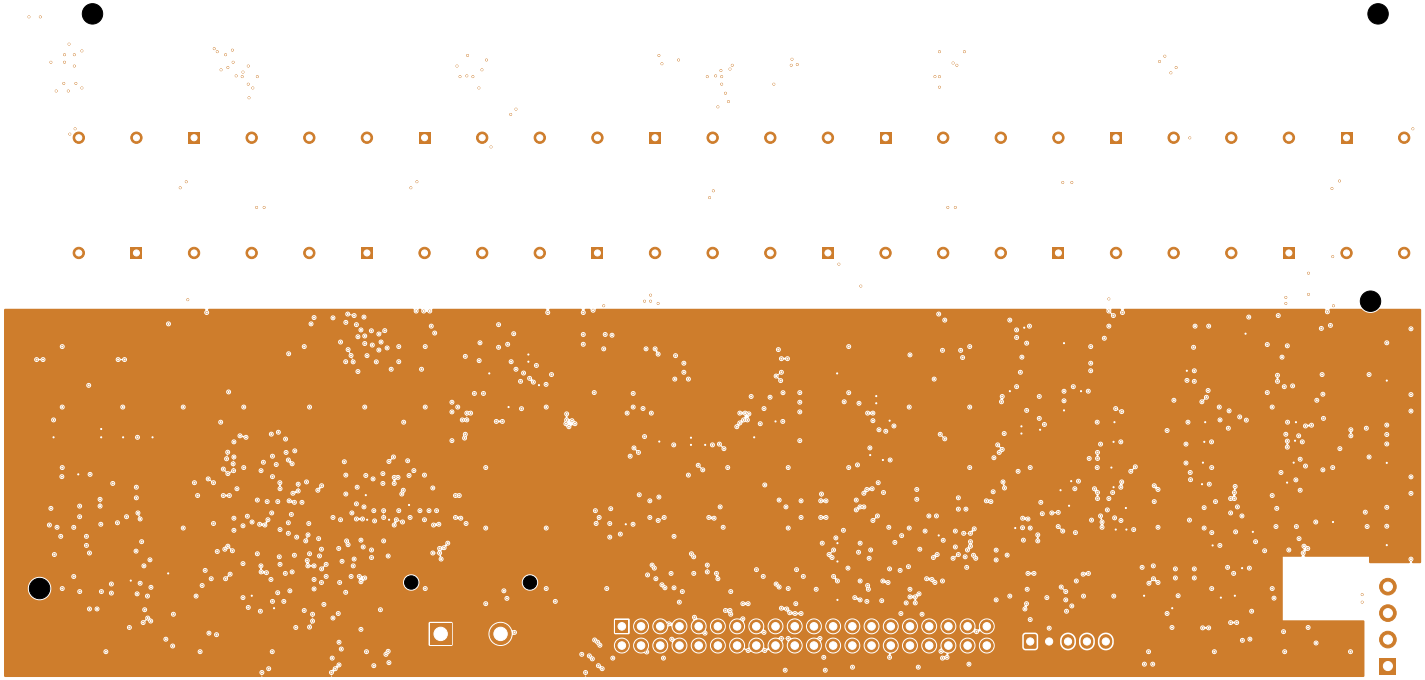

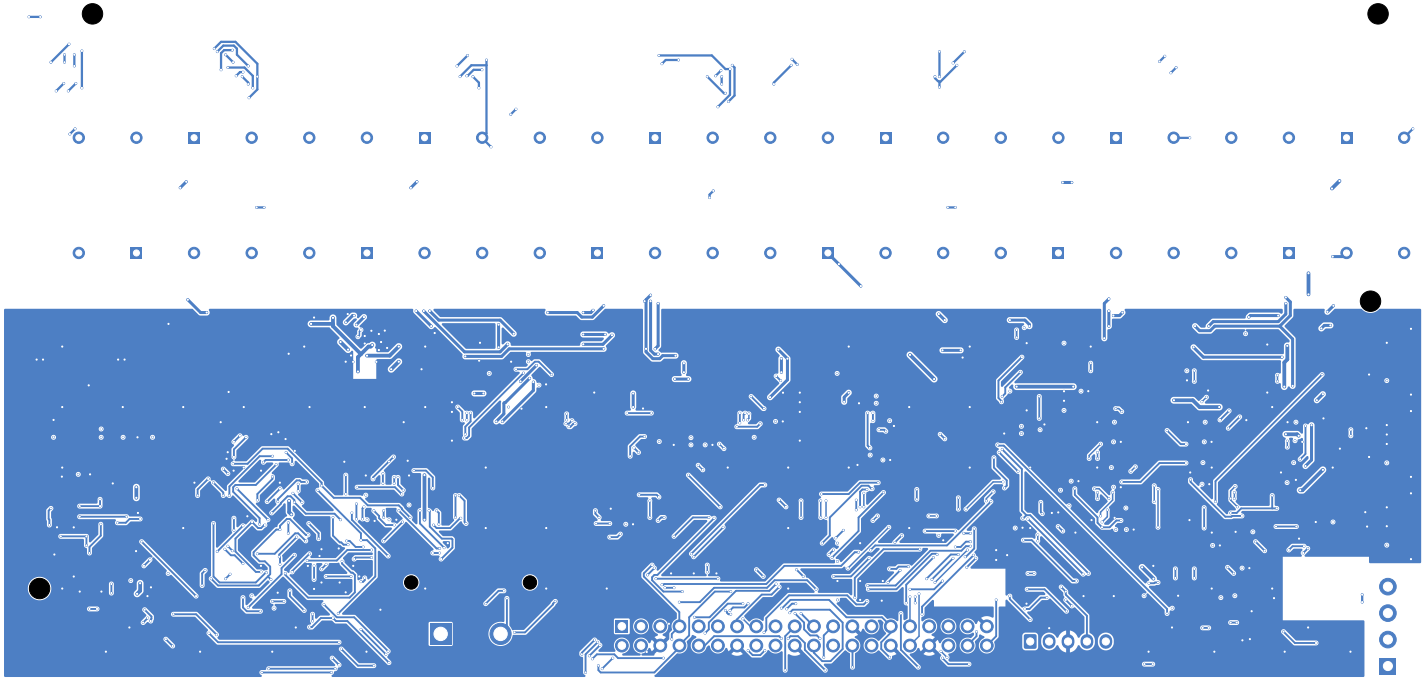
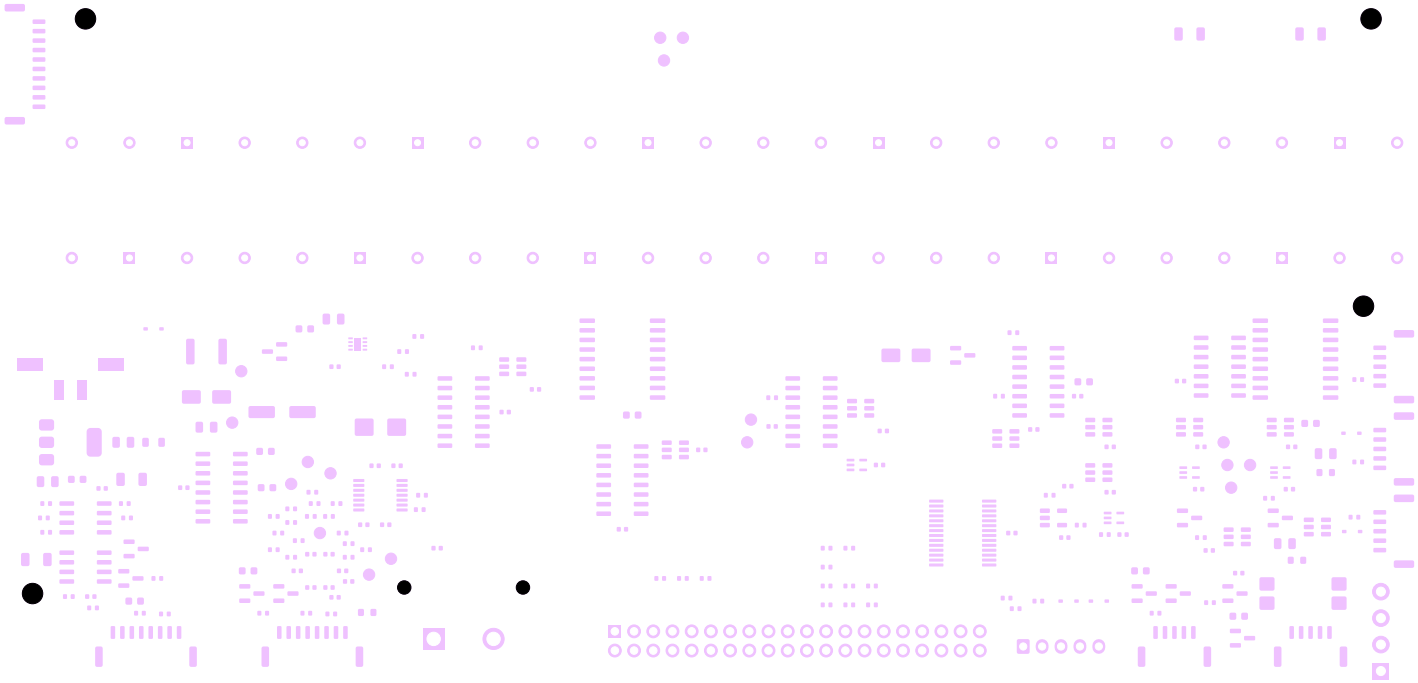
TP_DSEL
cooksense SMC0985KS sidecar v1.3
NYLON HW
J_ISOLOOP (SE CORNER) = ISOLATED 30V CONTACTOR LOOP -- NOT SELV
MOUNTING HW: NYLON M2.5 -- OR METAL IN A NON-CONDUCTIVE ENCLOSURE ONLY.
A PLATE BONDING ANY 2 HOLES BREAKS THE 6mm KEYPAD ISOLATION. ADR-0012
TP_USEL
KEYPAD ISOLATION COMB >=6mm creepage GND_ISO ONLY (contact columns face pockets)
TP_RKEY
R_KEY
R_STOP
NYLON HW
J_KEY_MATRIX
K_U1
K_U2
K_U3
K_U4
K_U5
K_U6
K_D1
K_D2
K_D3
K_D4
K_PRESS
K_STOP
U_ULNB
NYLON HW
D_ESD_JN
F1
5V SELV IN
J_PWR
C_JN1
C_JN2
Q_REV
R_OVB
R_PG
U_DECUEN
R_DECUPD
D_REVCLAMP
TP_PGOOD
U_EFUSE
R_ILM
C_DVDT
Q_JVS
R_OVT
TP_TCFAULT
C_DECUEN
U_LDO
R_TH1
C_LDOOUT
TP_5VP
FB1
R_SER2
R_REF7
C_LDOIN
C_COMP
C_3V3A1
R_REF5
TP_SPARE
R_REF4
R_REF6
U_TC
R_TCN
C_TCNA
U_DECU
C_DECU
TP_ENCL
C_ADCV
C_TCD
C_3V3
R_HYS1
R_TEMPOK
R_SWPUA
C_TCDV
R_SER5
C_3V3A2
R_REF6
U_COMP
R_CLMPB
R_CLMPA
R_TCP
Q_SWDRVA
C_ADCV2
R_SER3
TP_TEMPOK
C_FLT6
C_TCAV
R_HYS2
ANMLOG SENSE (3V3_ANALOG)
R_REF4
TP_TCDRDY
Q_SWB
C_FLT1
R_TH2
C_SWA
U_ADC
C_FLT4
C_FLT2
TP_TCTH
Q_SWA
R_SER7
C_FLT0
C_TCPA
J_TC
C_COMP2
Q_SWDRVB
C_FLT7
C_FLT3
R_REF3
U_COMP2
R_SCLA
C_SWB
R_SCLB
R_SDAB
R_SER6
R_OPENB
C_FLT5
NYLON HW
R_OPENT
R_SWPUB
R_SDAA
J_THERM_A
J_THERM_B
U_ULNA
C_ULNA
U_LATCHG
C_LATCHG
U_SR1
C_SR1
R_MCUENPD
R_HOSTAUTHPD
R_KRSTPD
J_PI
PI 40-PIN RIBBON (SIDECAR)
R_RAENRHAPD
R_DECDPD
TP_5VKR
TP_3V3
C_DECD
U_DECD
D_KSTOP
Q_STOPDRV
U_DECDEN
C_DECDEN
U_STOPINV
C_STOPINV
R_EXPRST
R_BID1
R_CTRREQPD
R_BID0
R_RAENBPD
R_RAENAPD
R_REARMPU
R_RAENRHEPD
U_EXP
C_EXP
U_WD
C_MR
R_LCDAT
R_LCCLK
D_LCCLK
R_STOPPD
J_LOADCELL
R_OS2
U_ONESHOT
R_OS
C_OSCLR
U_OSCLR
C_OS
C_OSV
U_AND1
C_AND1
U_AND2
C_AND2
U_FAULTAND
R_MR
C_WD
R_COILENPD
C_FAULTAND
U_DENAND
R_WDPETPD
C_LATCHA
C_DENAND
R_OE
C_SWRHA
R_SWPURHA
Q_SWRHA
U_SCHM
C_SCHM
TP_WDOK
TP_FAULT
U_LATCHA
TP_ALLOW
R_MSG
TP_ESTOP
U_CAND1
Q_SWDRVRHA
Q_COILDRV
C_CAND1
C_CAND2
Q_SWRHE
C_SWRHE
Q_SWDRVRHE
J_RH_AMBIENT
J_RH_EXHAUST
J_ISOLOOP
J_MODE
R_WDOUTPD
C_ULNB
D_ESTOP
C_STOPB
R_DOORPD
D_DOOR
J_DOOR
R_ESTOPPD
Q_COIL
U_LATCHB
C_AND3
J_ESTOP
U_CAND2
C_LATCHB
C_KR
U_OPTO