




1. INPUT + PROTECTION (3S LiPo 9.0–12.6V, <=9A)

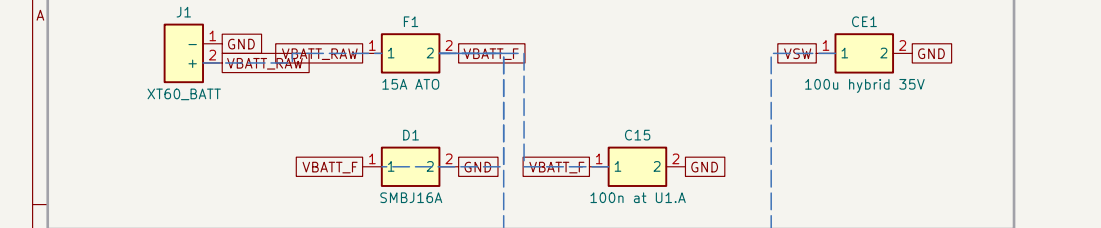


2. FRONT-END: LM74800-Q1 + 2x CSD18543Q3A b2b (rev-pol; UVLO 9.33V on / OV 15.25V)

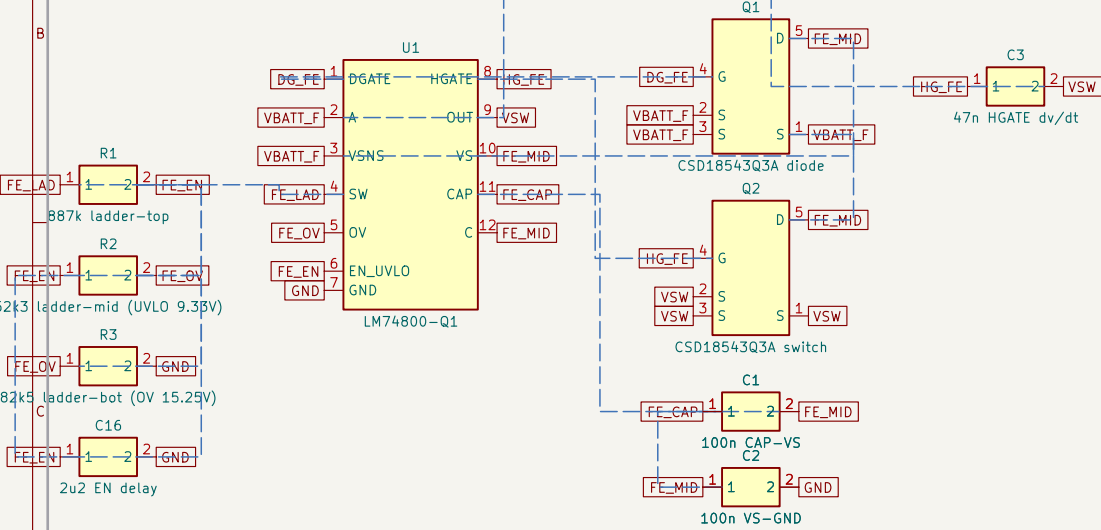


3. BUCK A 5.08V / 6A -> 5V_C (USB-C) [math: 01_docs/DETAIL_DESIGN.md]

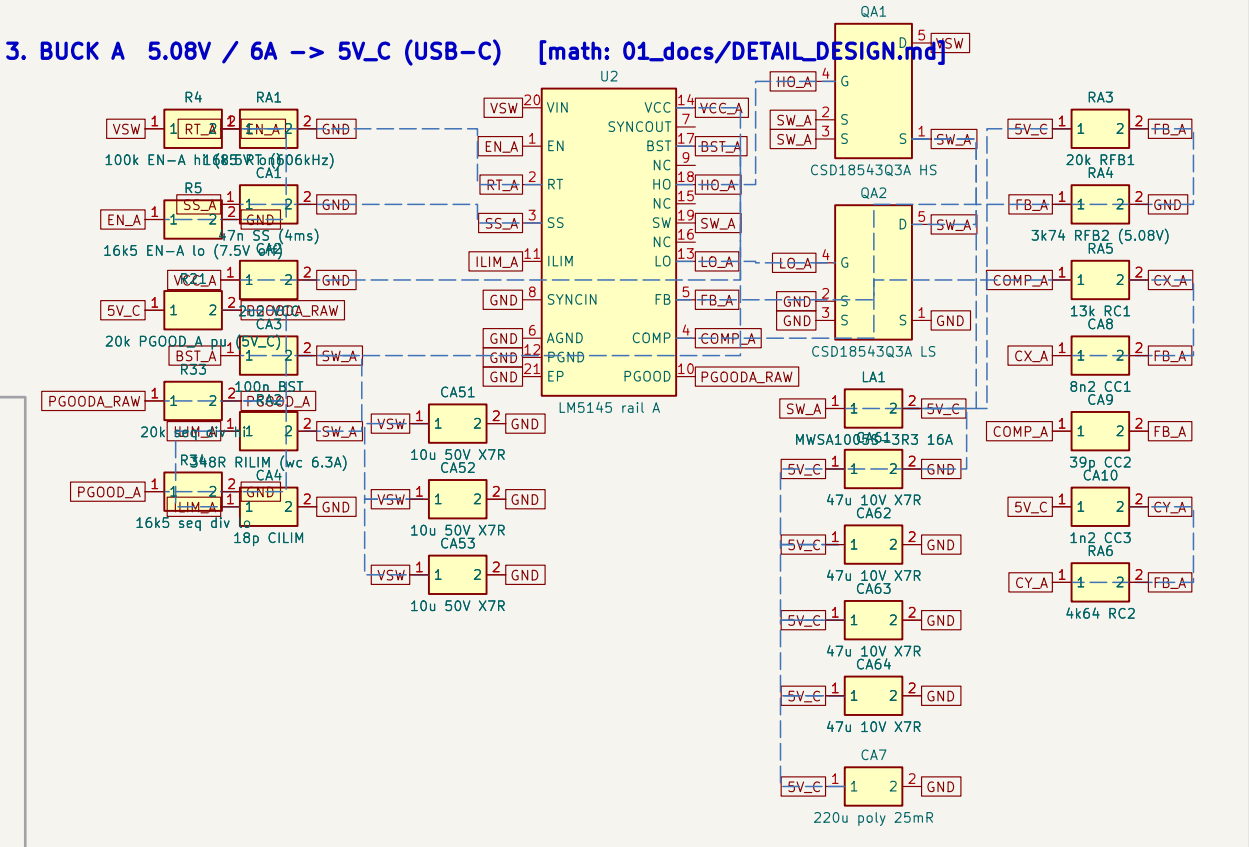


4. BUCK B 5.08V / 7.5A -> 5V_A (3x USB-A) EN = PGOOD_A

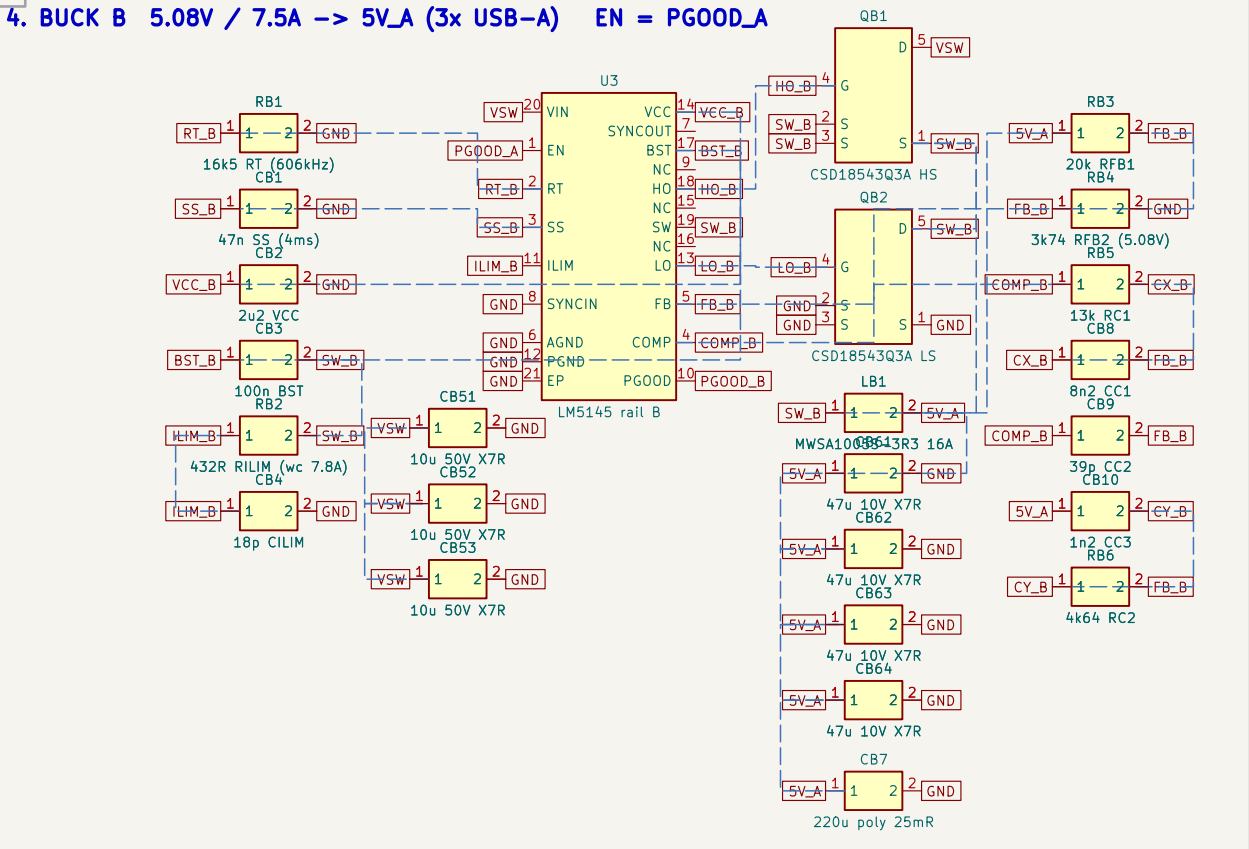


5. USB-A x3: TPS2557 ILIM 2.51A each, D+/D- DCP short (ADR-0003)

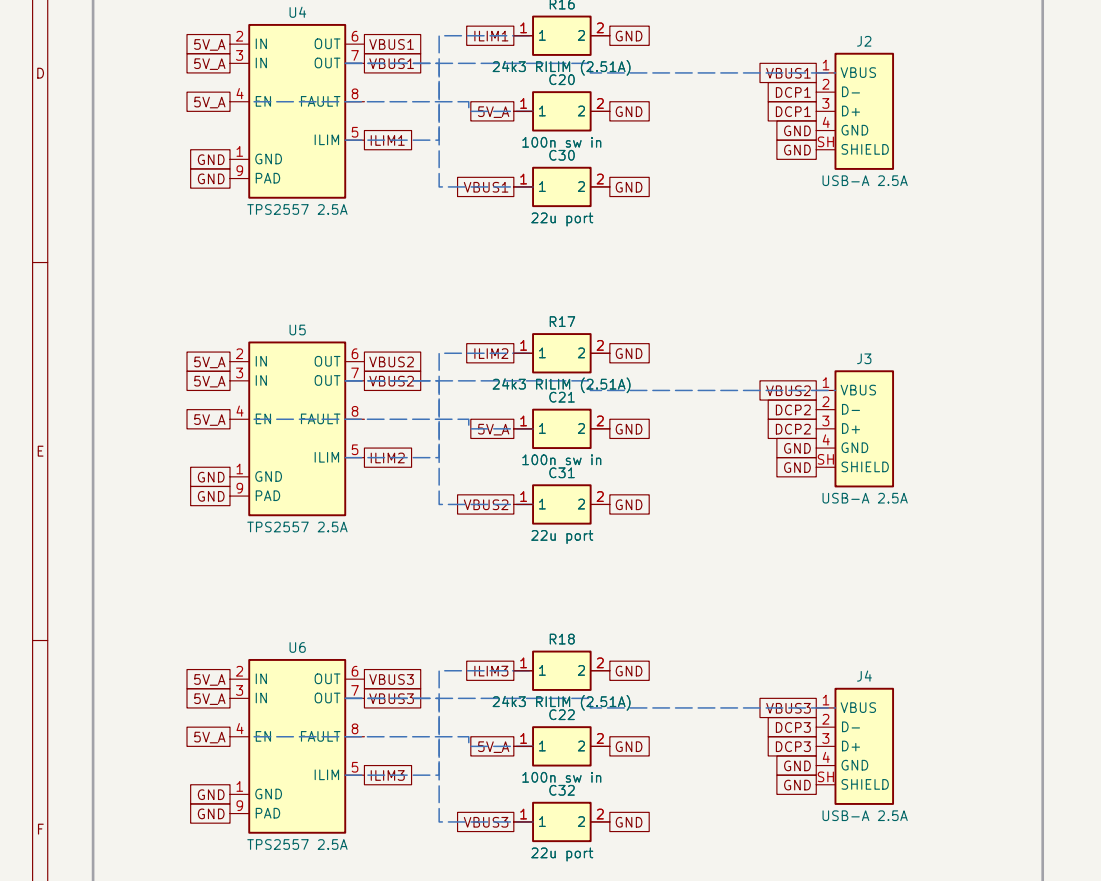

6. USB-C source: Rp 10k x2 = 3A advertisement, 6A copper (ADR-0002)

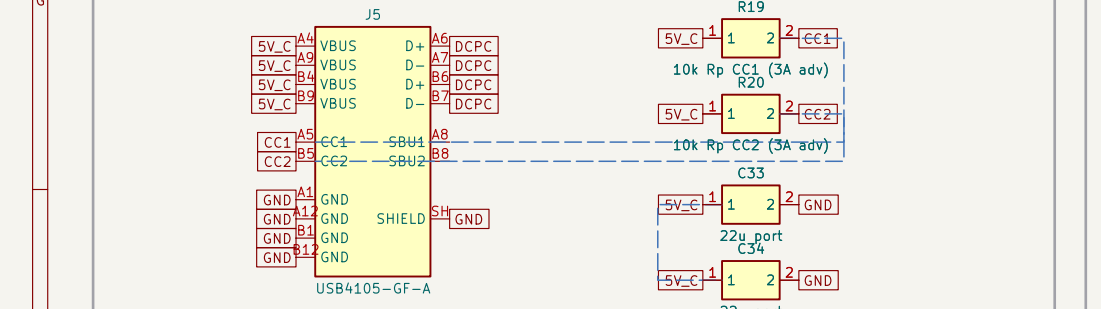

7. RAIL CLAMPS + LEDs

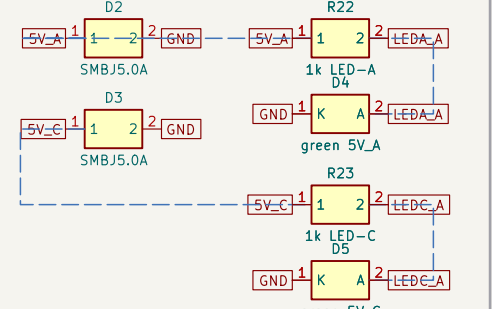

3S LiPo -> 3x USB-A 2.5A + USB-C 6A; 01_docs/ + ADRs in repo