


PLUTO RX2 8-WAY v5

USB-C POWER ONLY — 5 V sink / independent CC1+CC2 Rd / fuse, TVS and 3.3 V LDO / NO USB DATA


Page 1 of 4 • exact circuit.json SHA-256 37c7a0083c4736f9... • 9 components • landscape page fit

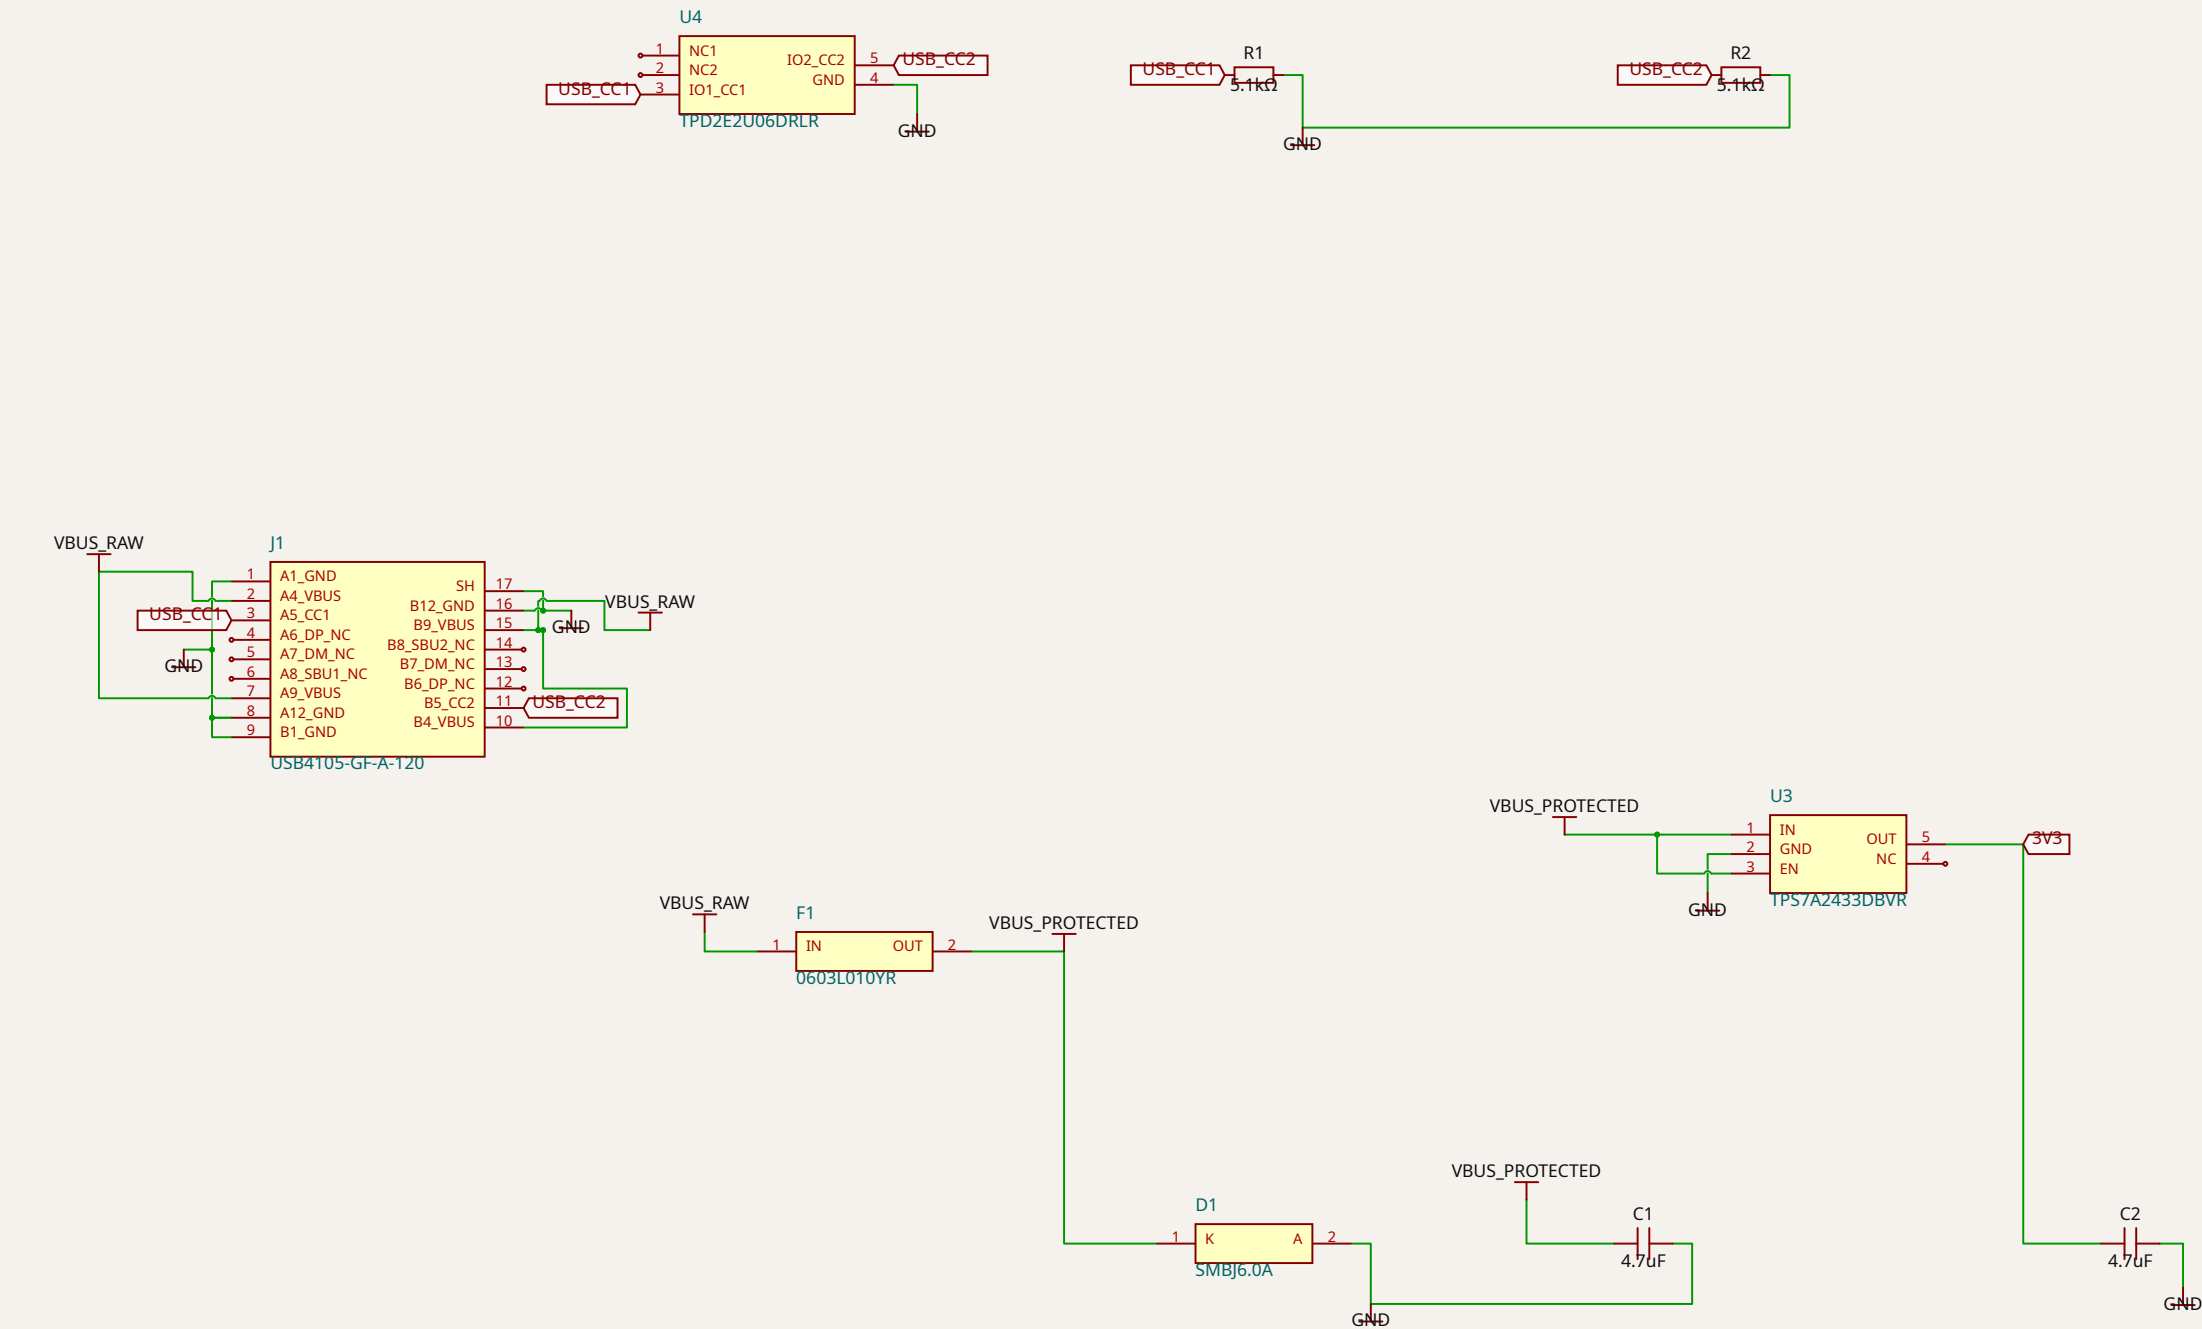

PLUTO RX2 8-WAY v5


RF SWITCH CORE — PE42482 true absorptive SP8T / receive only / 100 MHz–5.9 GHz user-accepted extended operation

Page 2 of 4 • exact circuit.json SHA-256 37c7a0083c4736f9... • 6 components • landscape page fit

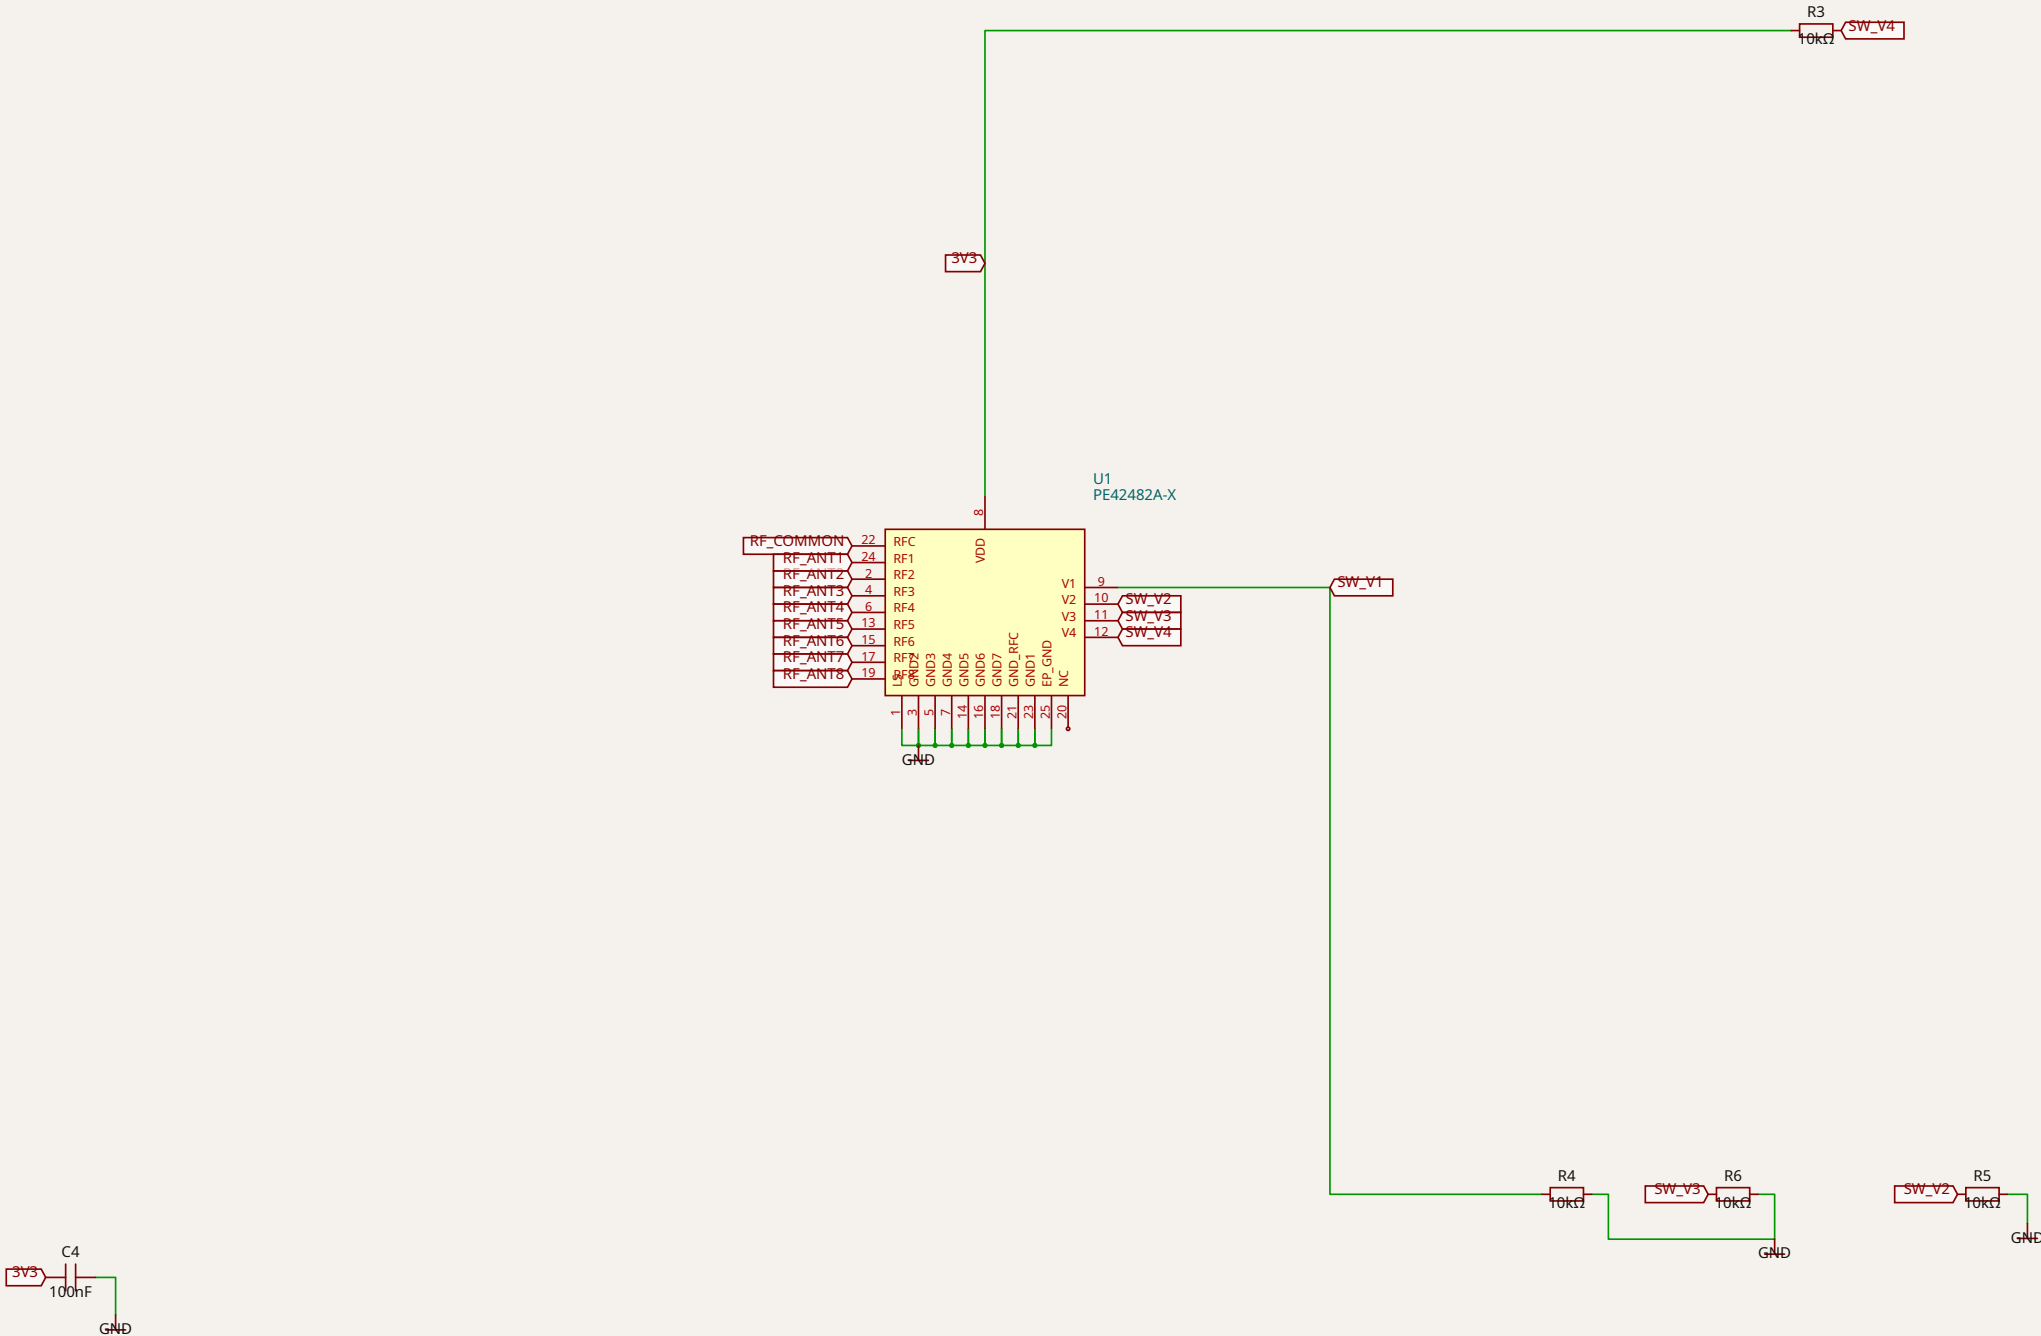

PLUTO RX2 8-WAY v5

RF INTERFACES — one Pluto RX common SMA and eight antenna SMAs / one selected throw maximum

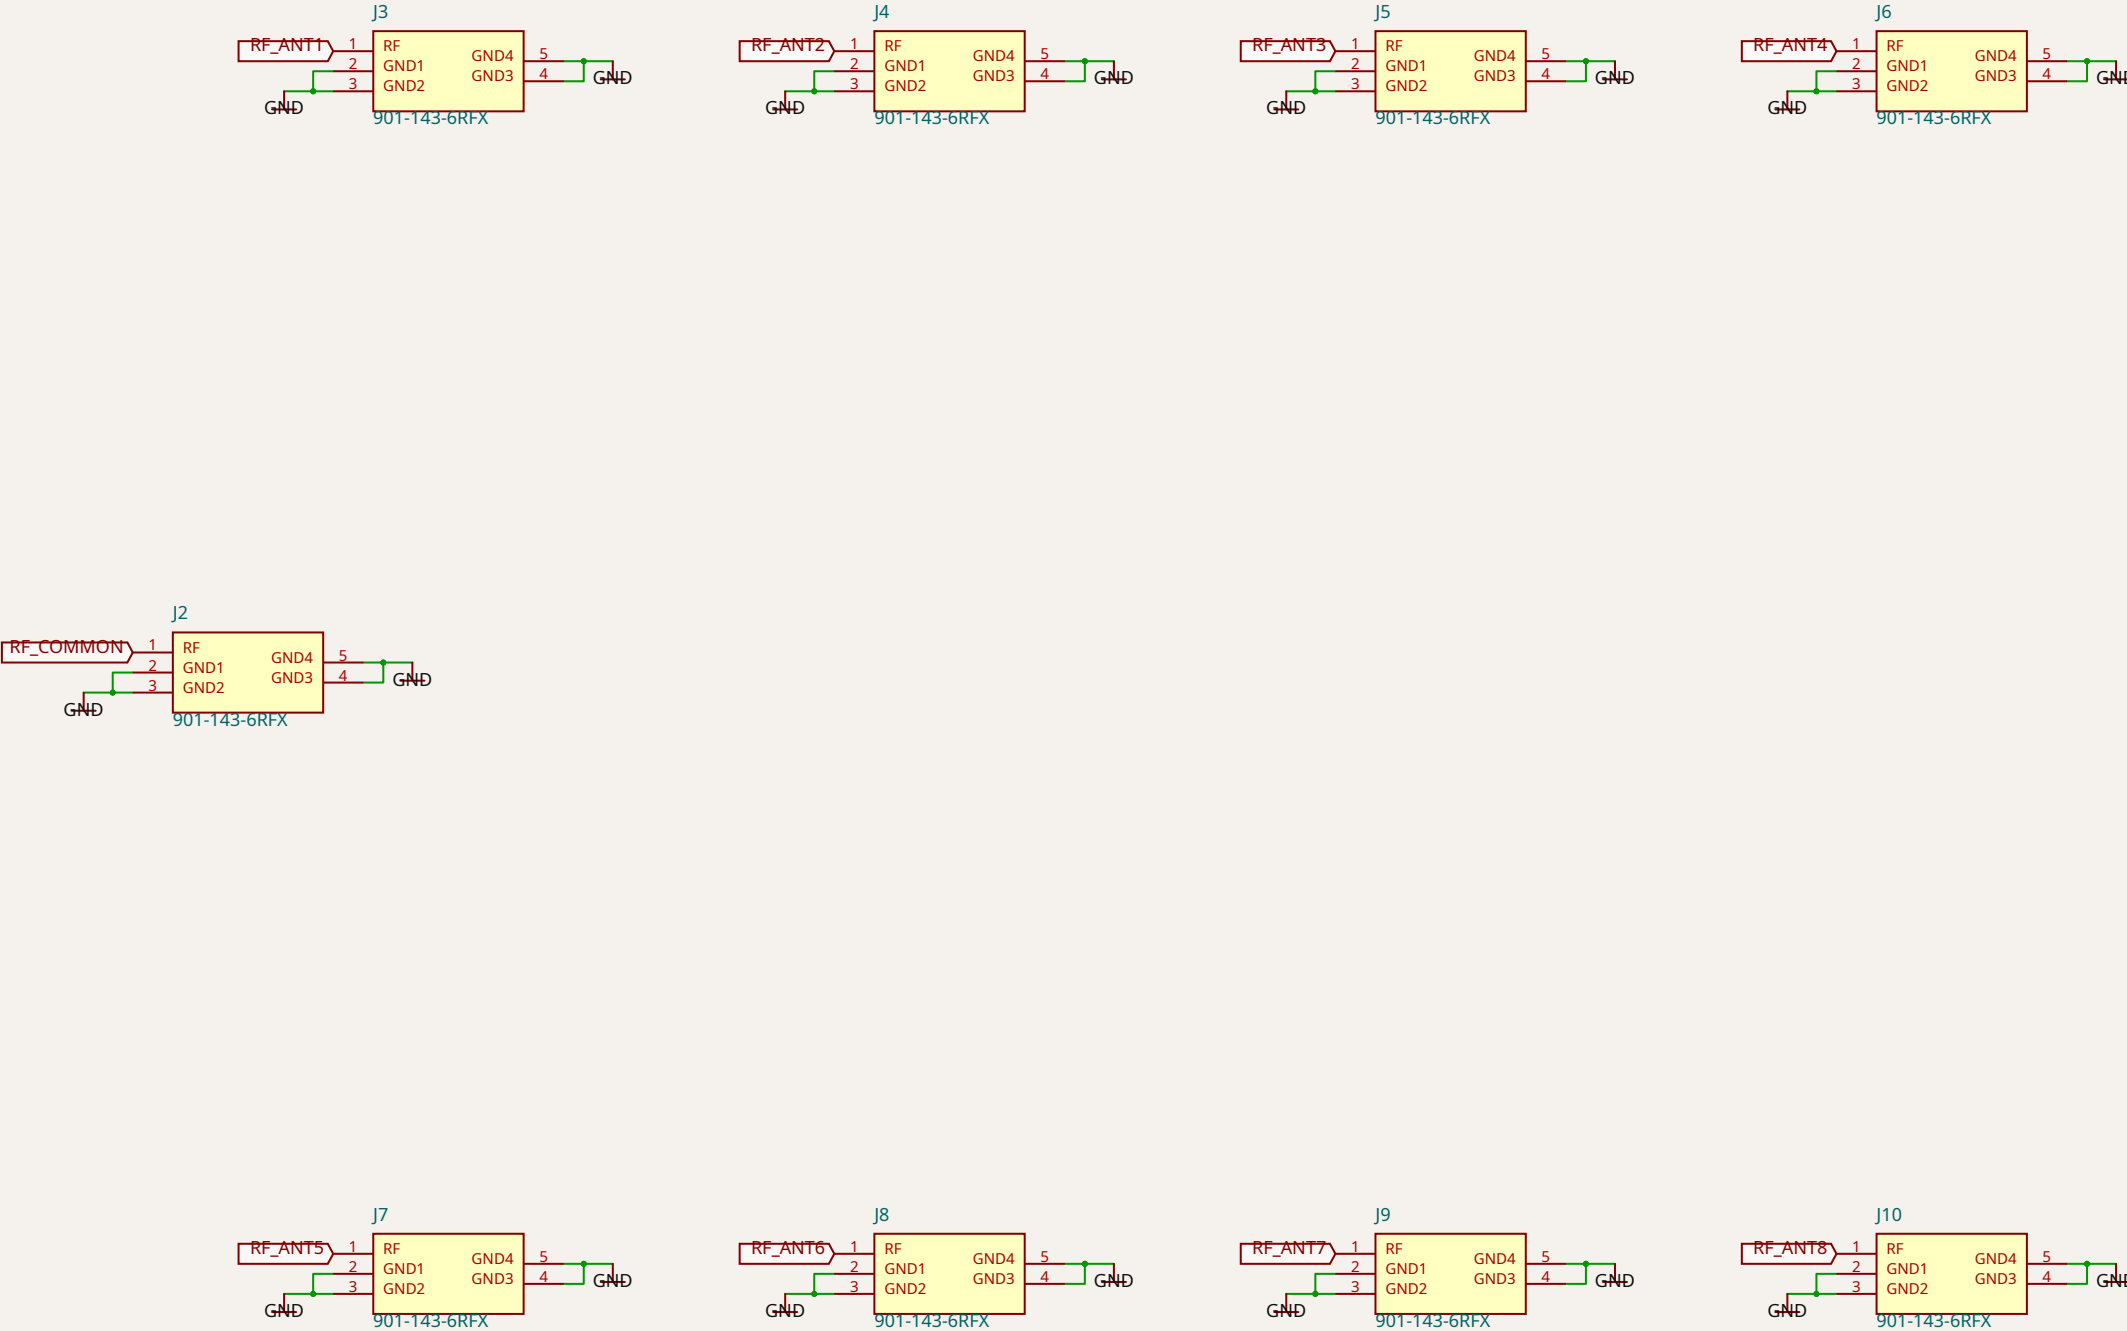

AUTONOMOUS CONTROL — STM32C011 / generated fast20-v1 dwell profile / direct Raspberry Pi or ST-LINK SWD

[illegible]