1. USB-C INPUT (UFP, 5V bus power) [ADR-0001 protection]

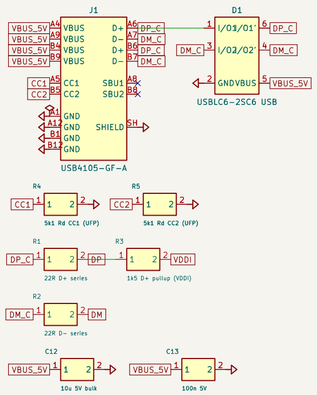

2. PCM2900C USB AUDIO CODEC (bus-powered fig-38; ADR-0002)

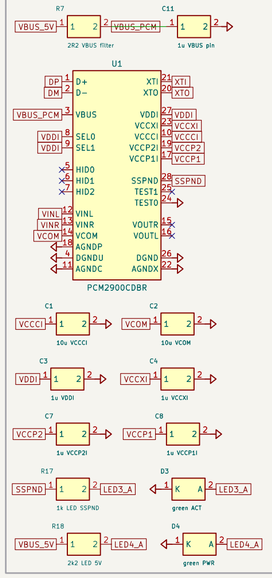

3. 12 MHz CRYSTAL (CL 20pF -> 33p)



4. 3V3A RAIL (TPS7A2033, ADR-0002)

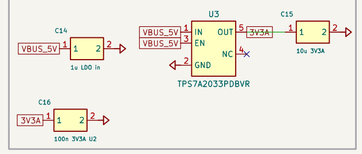

5. CH1 MIC: bias/ESD/series-R -> TLV9062A gain 4.0 (39k alt = 40x; ADR-0003)

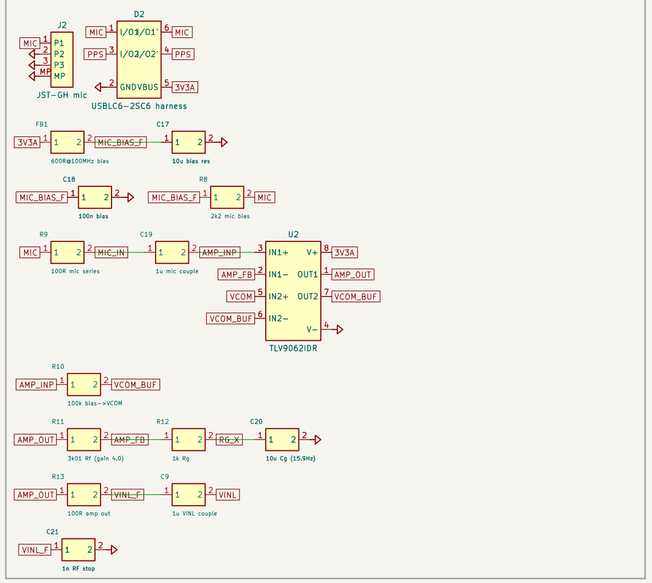

6. CH2 PPS: ESD/series-R -> 22k/10k divider (1.03Vpp) -> AC couple

USB stereo recorder: CH1 mic preamp, CH2 GNSS PPS; 01_docs/ + ADRs in repo

Sheet: /
File: crowsync_recorder.kicad_sch

Title: crowsync-recorder

Size: A2 | Date: 2026-07-17 | **Rev: v1.2**
KiCad E.D.A. 10.0.4 | Id: 1/1