




1. LOAD SENSORS: 4x 3-wire half-bridge ring OR J5 full bridge (mode = population) [D1, spec 3.7b]

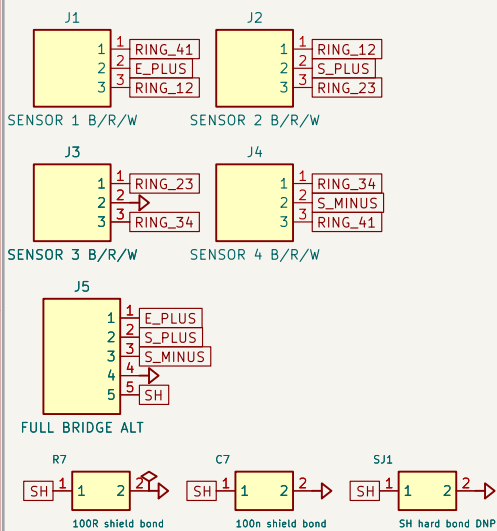

3. HX711 24-BIT BRIDGE ADC: ch A gain 128; XI=GND internal osc; RATE by JP1 [D3, spec 3.7d]

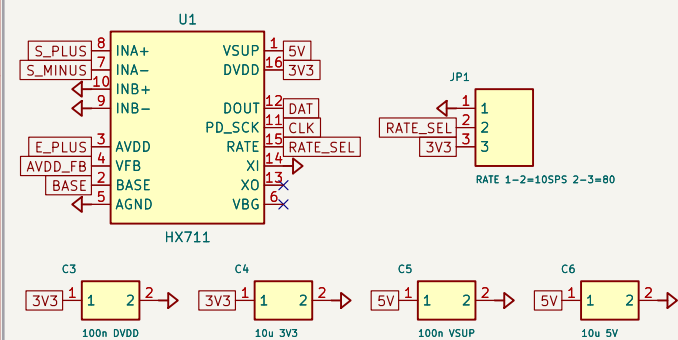

2. EXCITATION: HX711 analog regulator + S8550 $\rightarrow$ E+ = AVDD 4.30V [D2, HX711 DS typ. circuit]

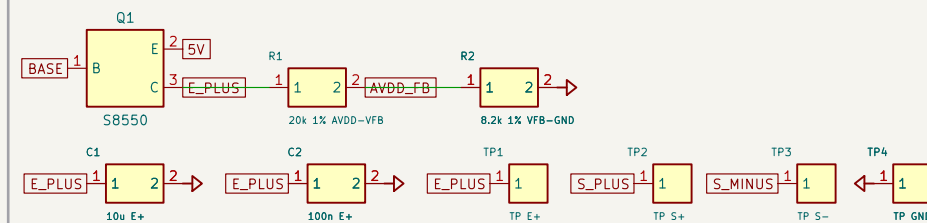

4. DIGITAL LINK TO COOK-HUB J6 (pin-for-pin): 5V 3V3 GND DAT CLK [D6/D7]

