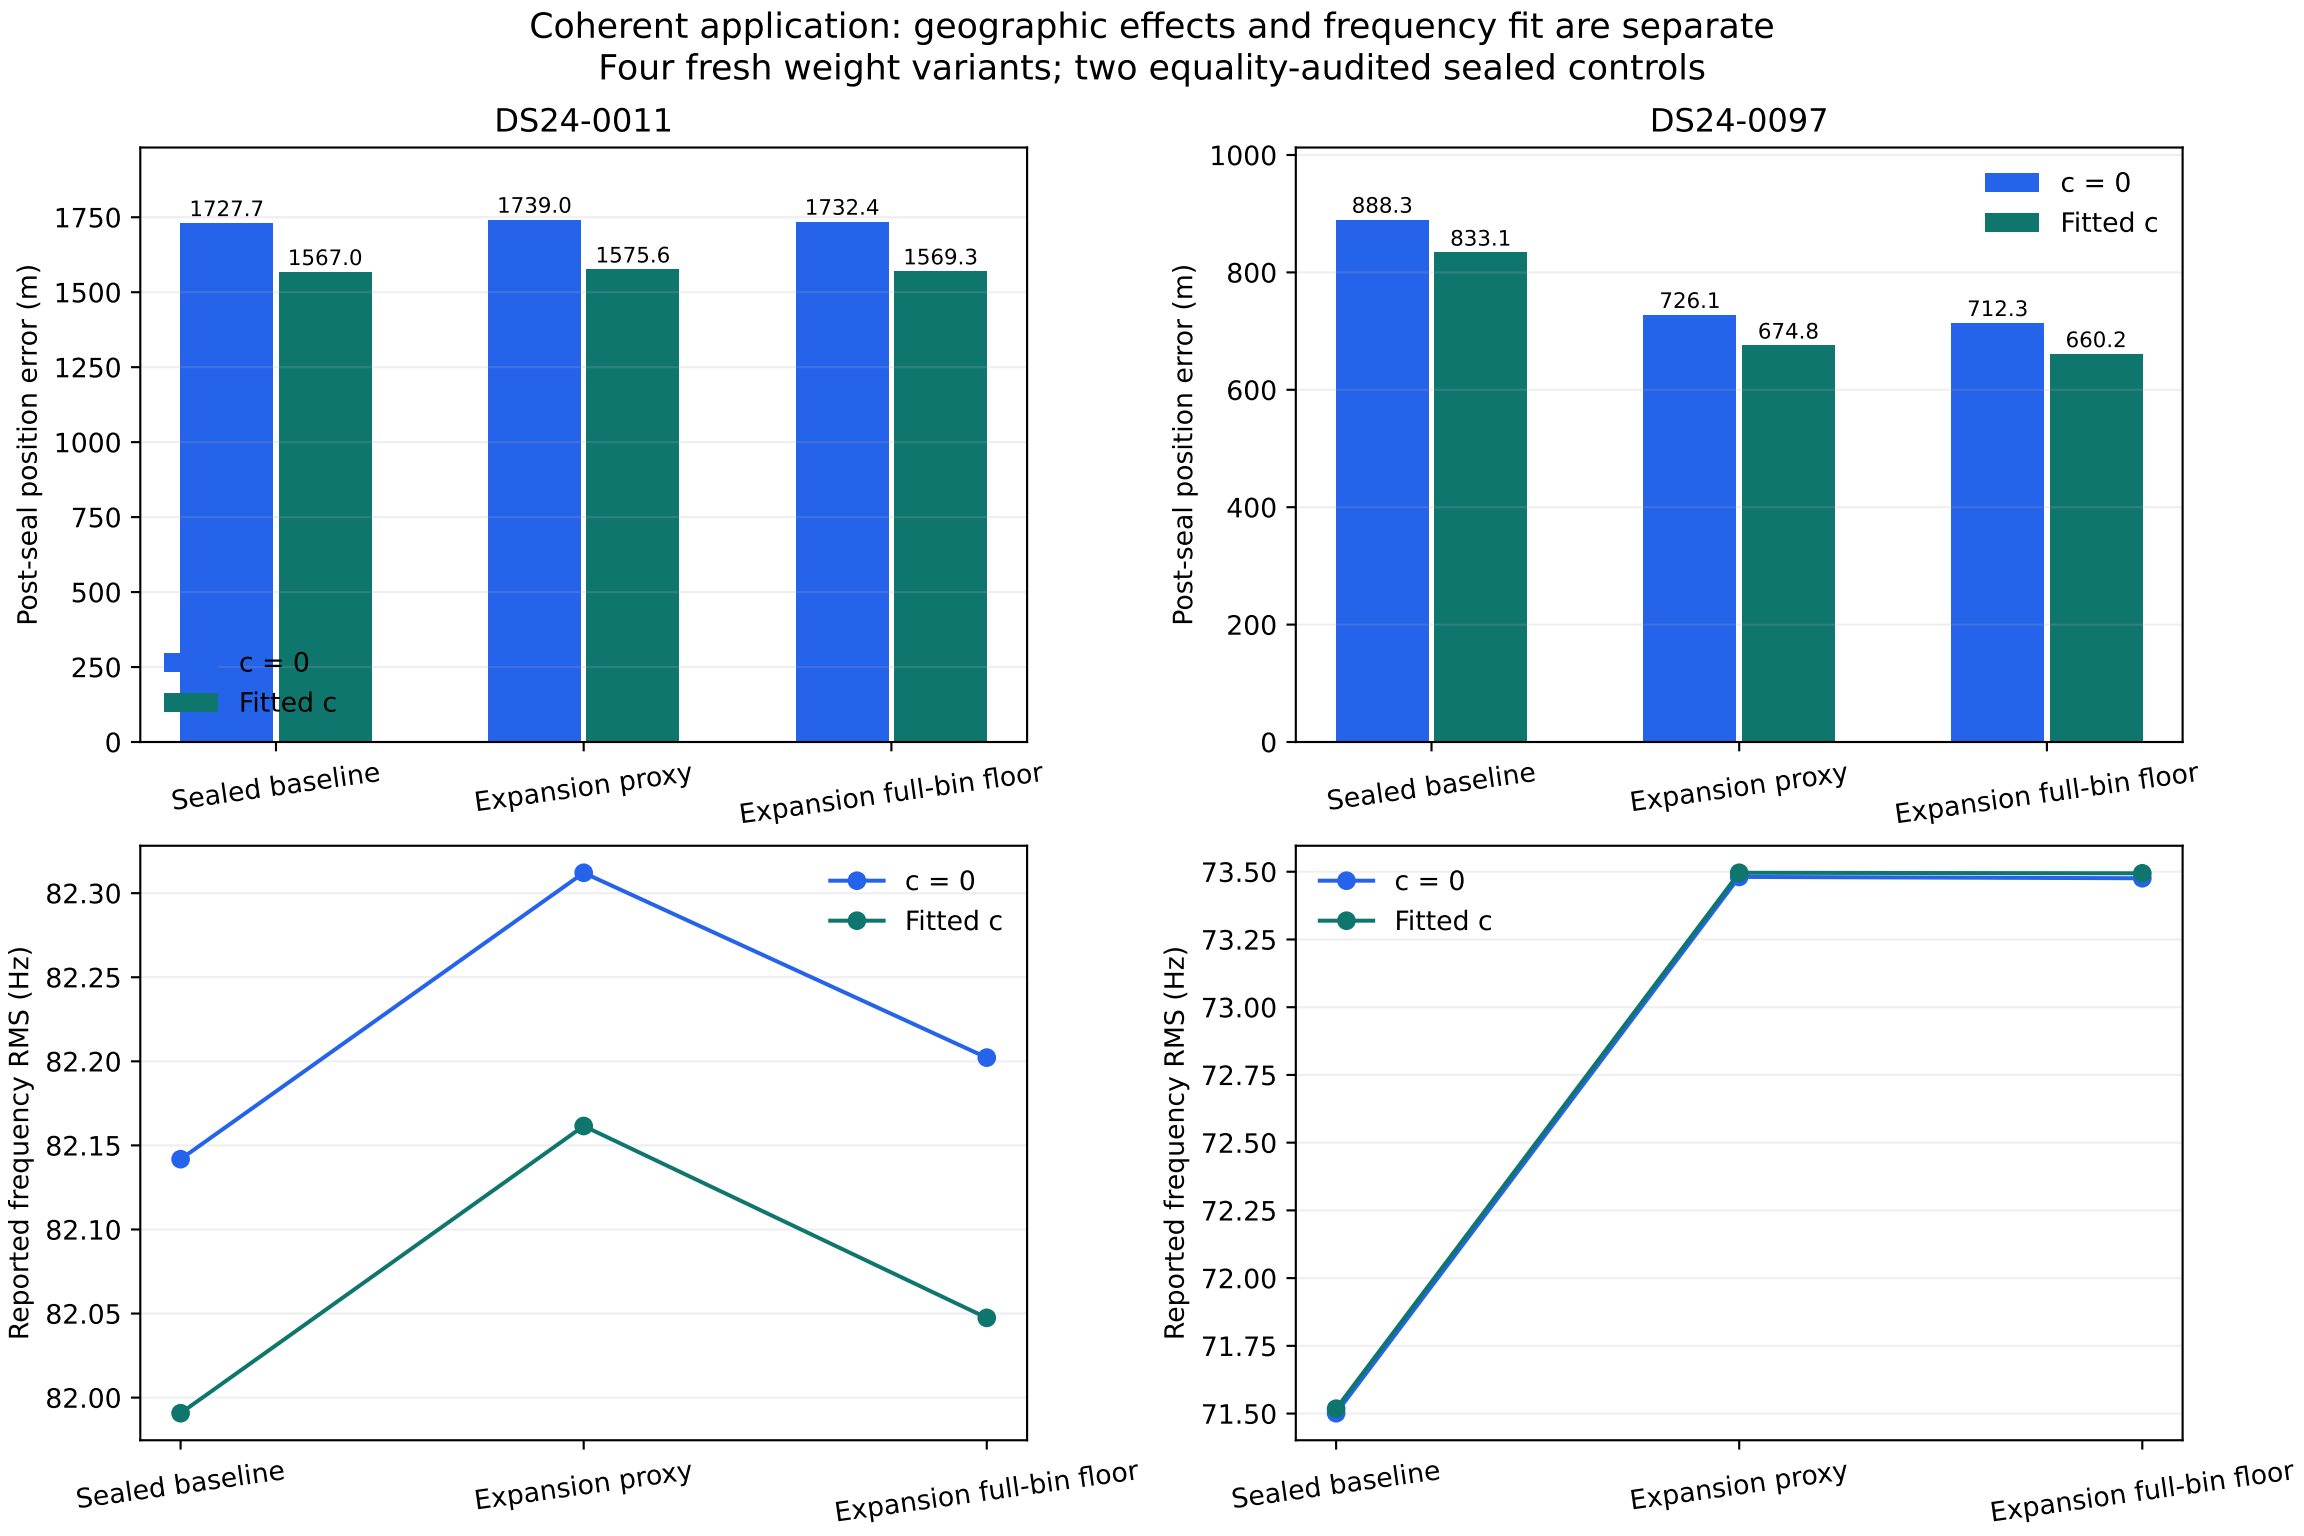
Coherent application: geographic effects and frequency fit are separate
Four fresh weight variants; two equality-audited sealed controls
DS24-0011
DS24-0097
Post-seal position error (m)
c = 0
Fitted c
1727.7
1567.0
1739.0
1575.6
1732.4
1569.3
888.3
833.1
726.1
674.8
712.3
660.2
Sealed baseline
Expansion proxy
Expansion full-bin floor
Reported frequency RMS (Hz)