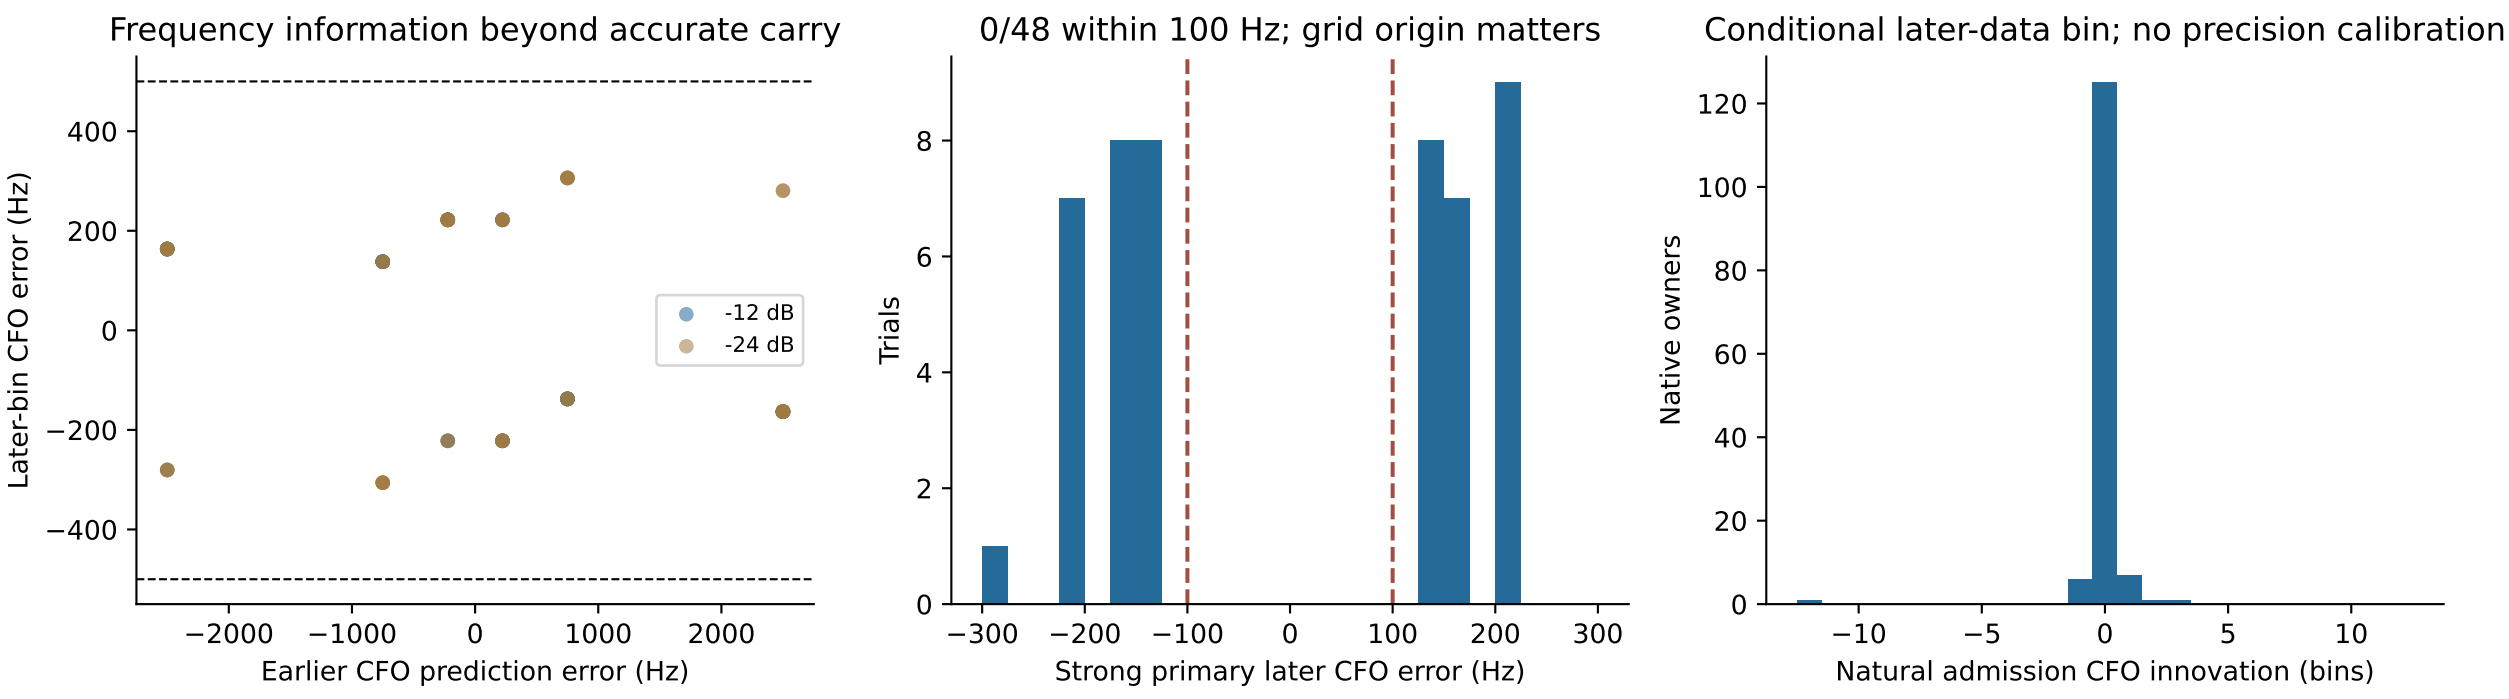
Frequency information beyond accurate carry
Later-bin CFO error (Hz)
400
200
0
−200
−400
−2000
−1000
0
1000
2000
Earlier CFO prediction error (Hz)
-12 dB
-24 dB
0/48 within 100 Hz; grid origin matters
Trials
8
6
4
2
0
−300
−200
−100
0
100
200
300
Strong primary later CFO error (Hz)
Conditional later-data bin; no precision calibration
Native owners
120
100
80
60
40
20
0
−10
−5
0
5
10
Natural admission CFO innovation (bins)