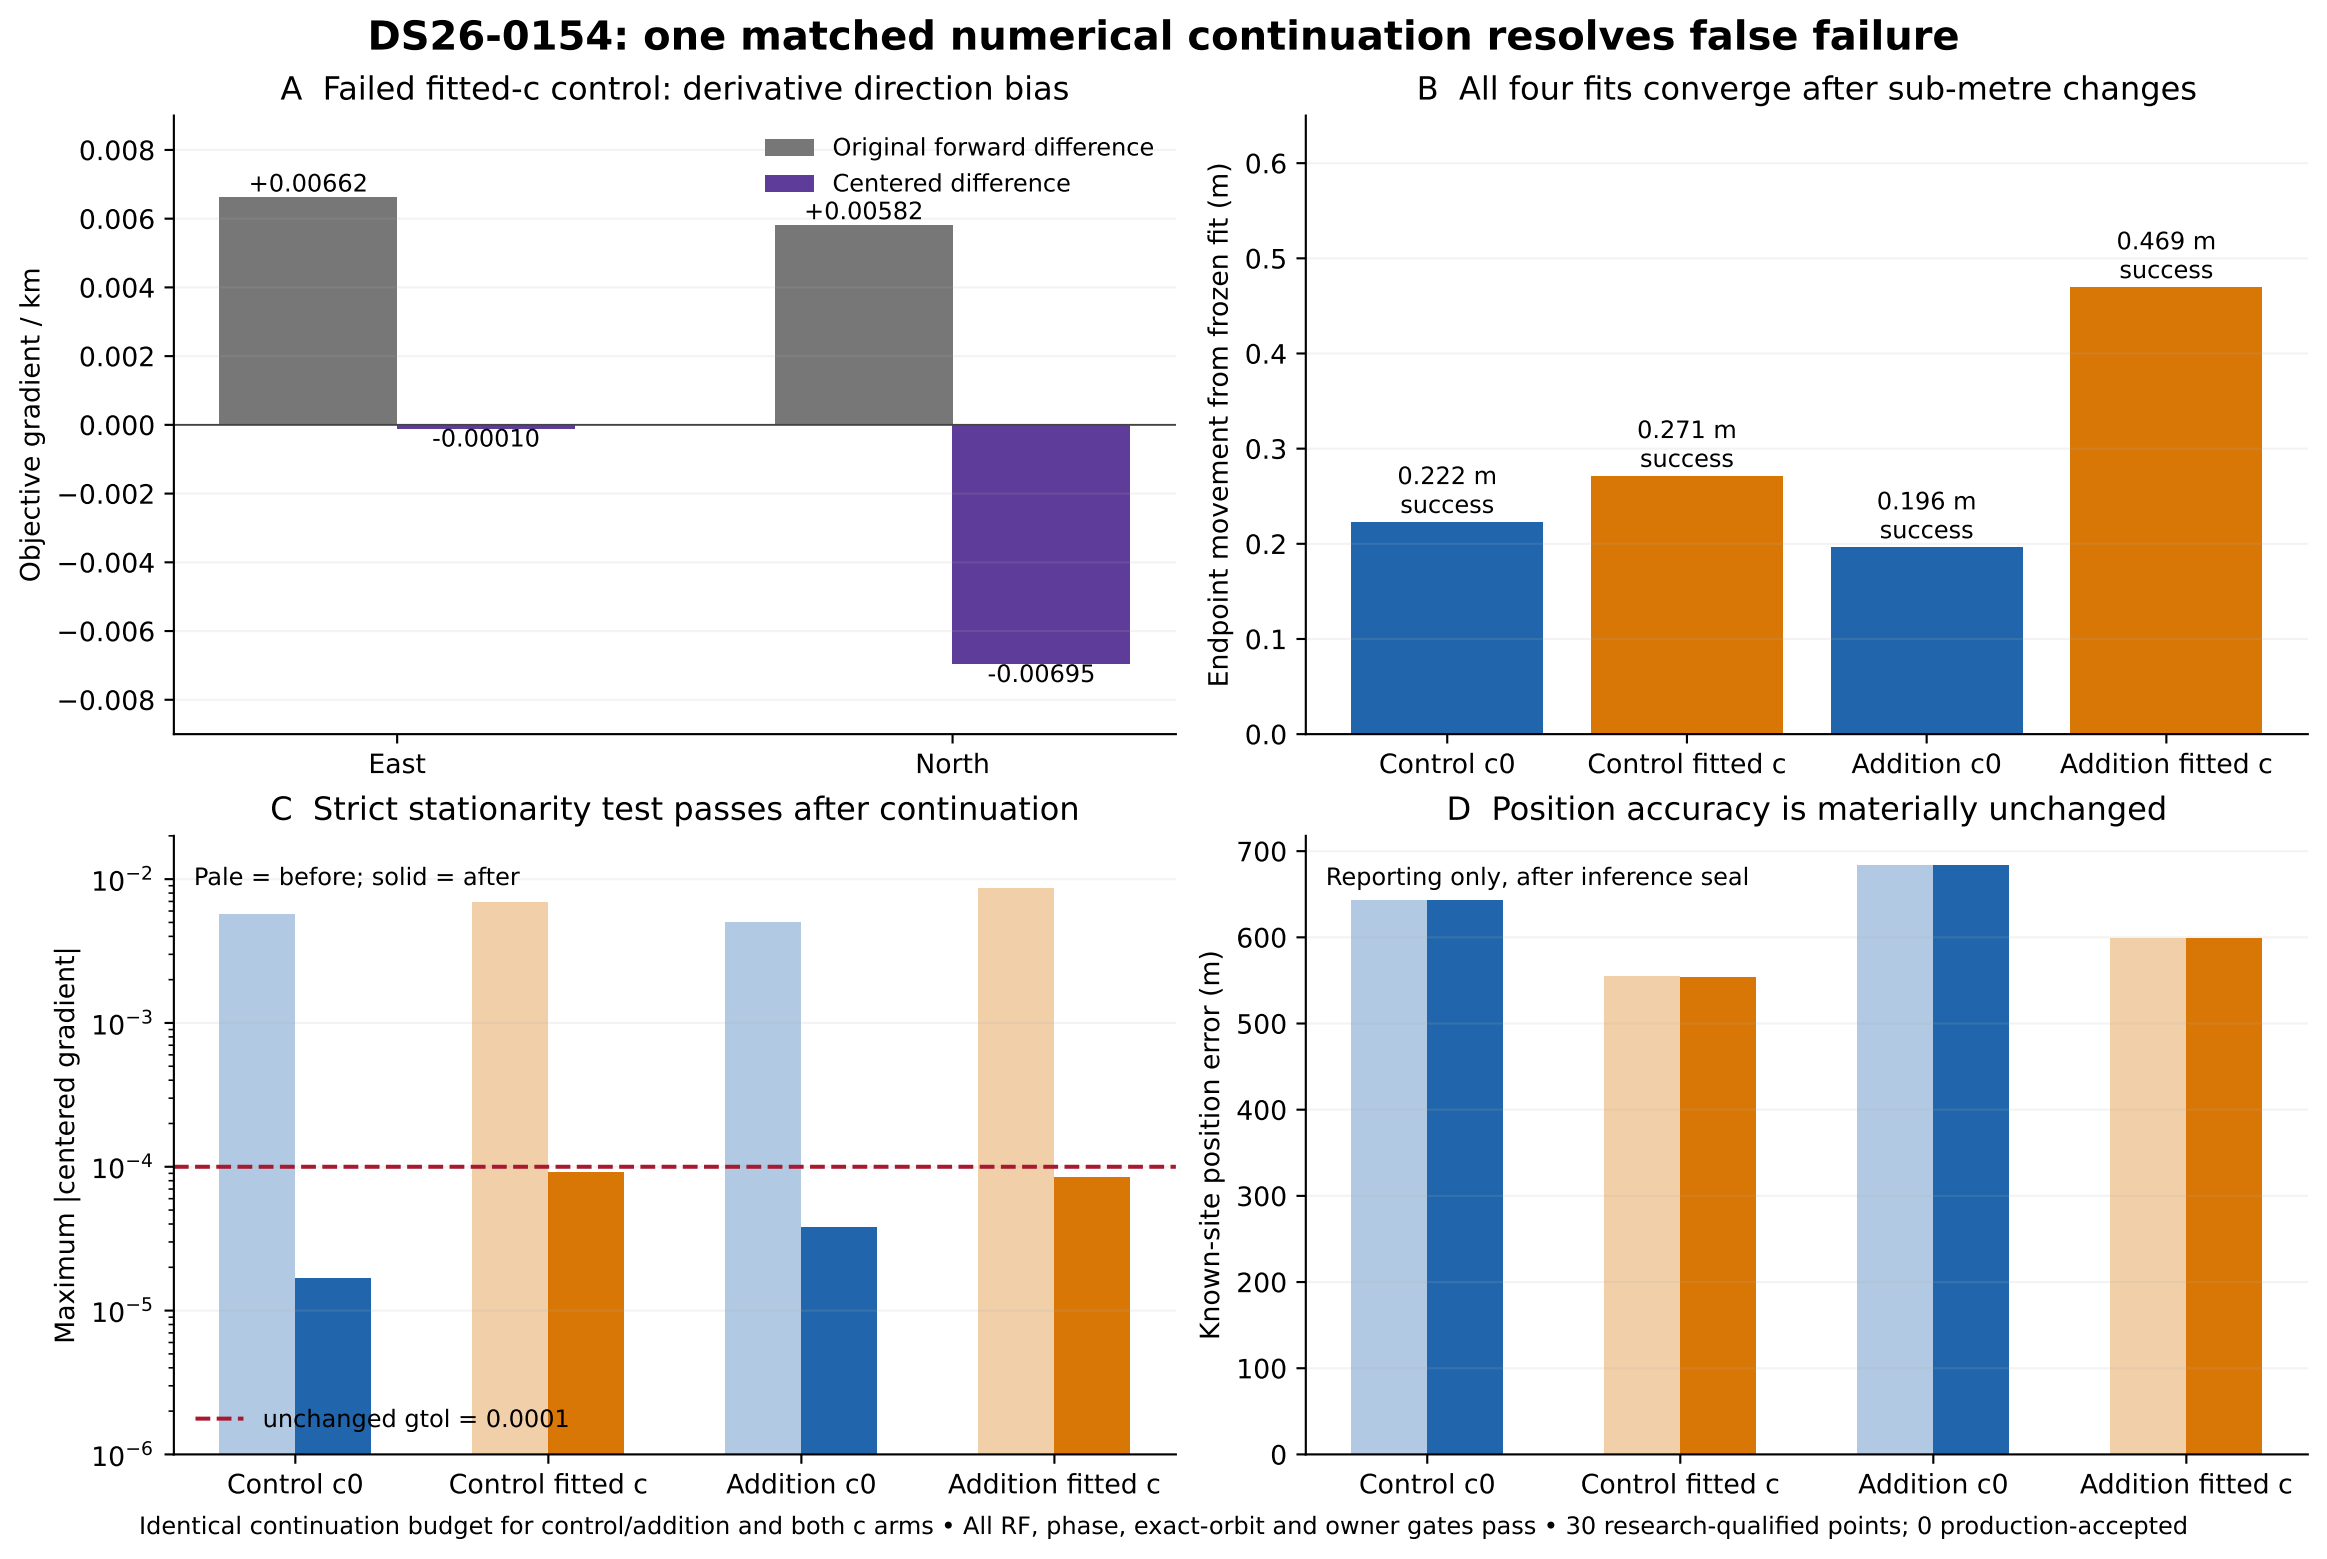
DS26-0154: one matched numerical continuation resolves false failure
A Failed fitted-c control: derivative direction bias
Objective gradient / km
Original forward difference
Centered difference
+0.00662
-0.00010
+0.00582
-0.00695
East
North
B All four fits converge after sub-metre changes
Endpoint movement from frozen fit (m)
0.222 m success
0.271 m success
0.196 m success
0.469 m success
Control c0
Control fitted c
Addition c0
Addition fitted c
C Strict stationarity test passes after continuation
Maximum |centered gradient|
Pale = before; solid = after
unchanged gtol = 0.0001
D Position accuracy is materially unchanged
Known-site position error (m)
Reporting only, after inference seal
Identical continuation budget for control/addition and both c arms • All RF, phase, exact-orbit and owner gates pass • 30 research-qualified points; 0 production-accepted