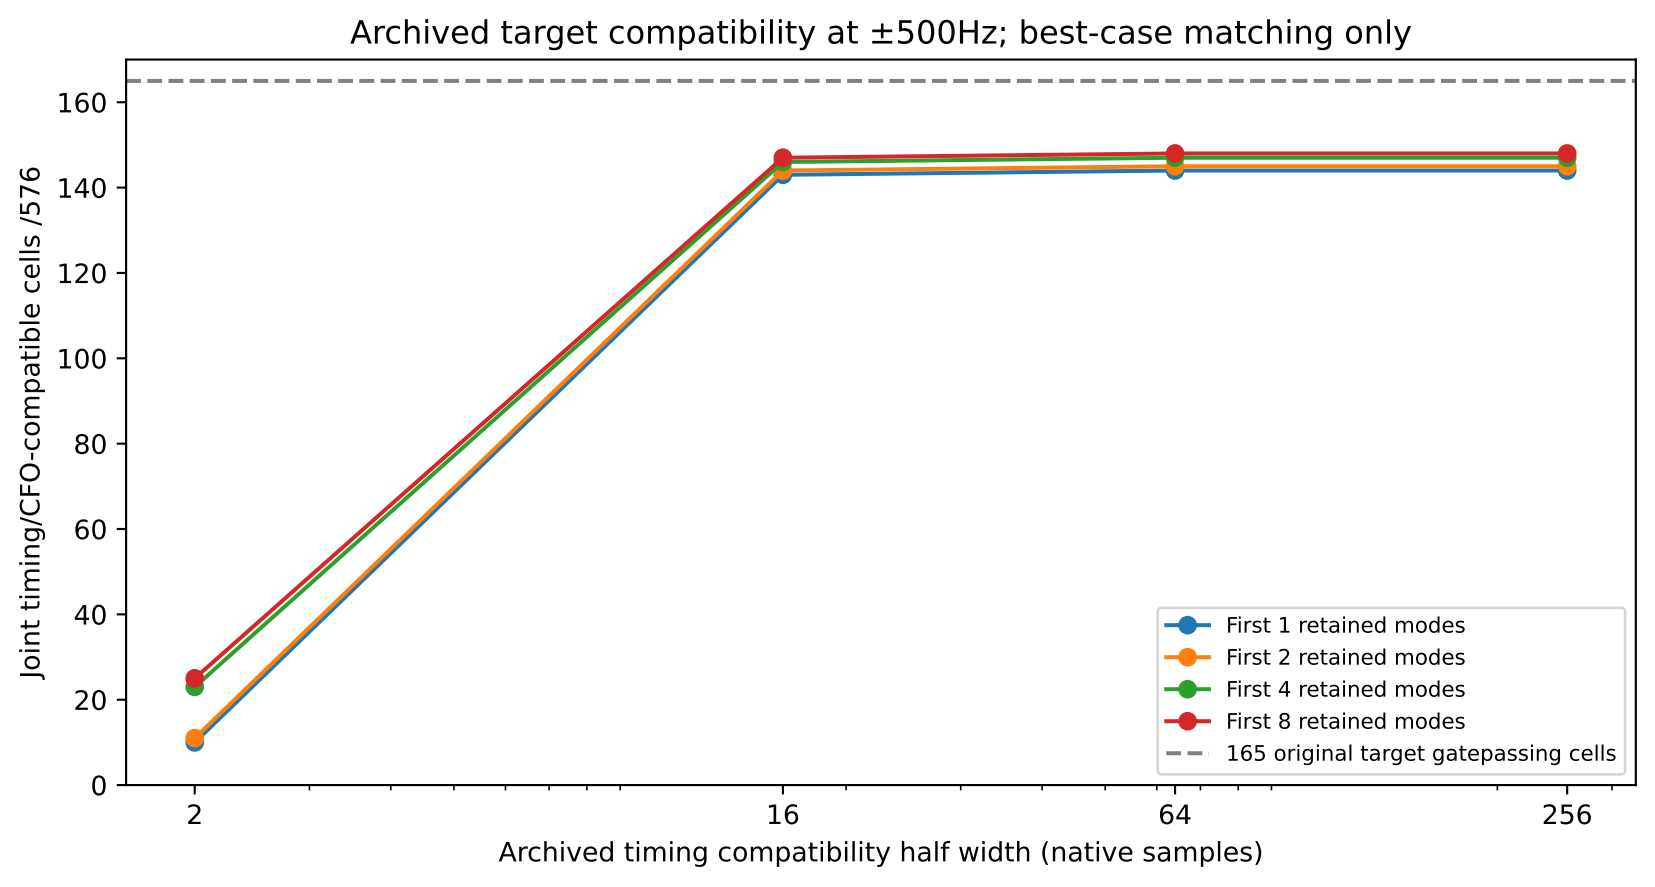
Archived target compatibility at ±500Hz; best-case matching only
Joint timing/CFO-compatible cells /576
0
20
40
60
80
100
120
140
160
2
16
64
256
Archived timing compatibility half width (native samples)
First 1 retained modes
First 2 retained modes
First 4 retained modes
First 8 retained modes
165 original target gatepassing cells